

LWDA100 Series


Product Characteristic

- Material: Galvanized Sheet Steel
- Supply Voltage: 230V,50Hz
- Direction of rotation: Clockwise,see on the lead
- Protection Class: IP54
- Insulation Class: F
- Operation Temperature: -10℃~+80℃
- Bearing: Ball Bearing
- Protection: Thermal Overload Protector(TOP)wired internally




Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Capacitor (μF)	Weight (kg)	Wiring Diagram
LWDA100S-F01	230	50	36	0.16	870	2	3.5	001
LWDA100S-F02	230	50	77	0.34	1800	2	3.5	001

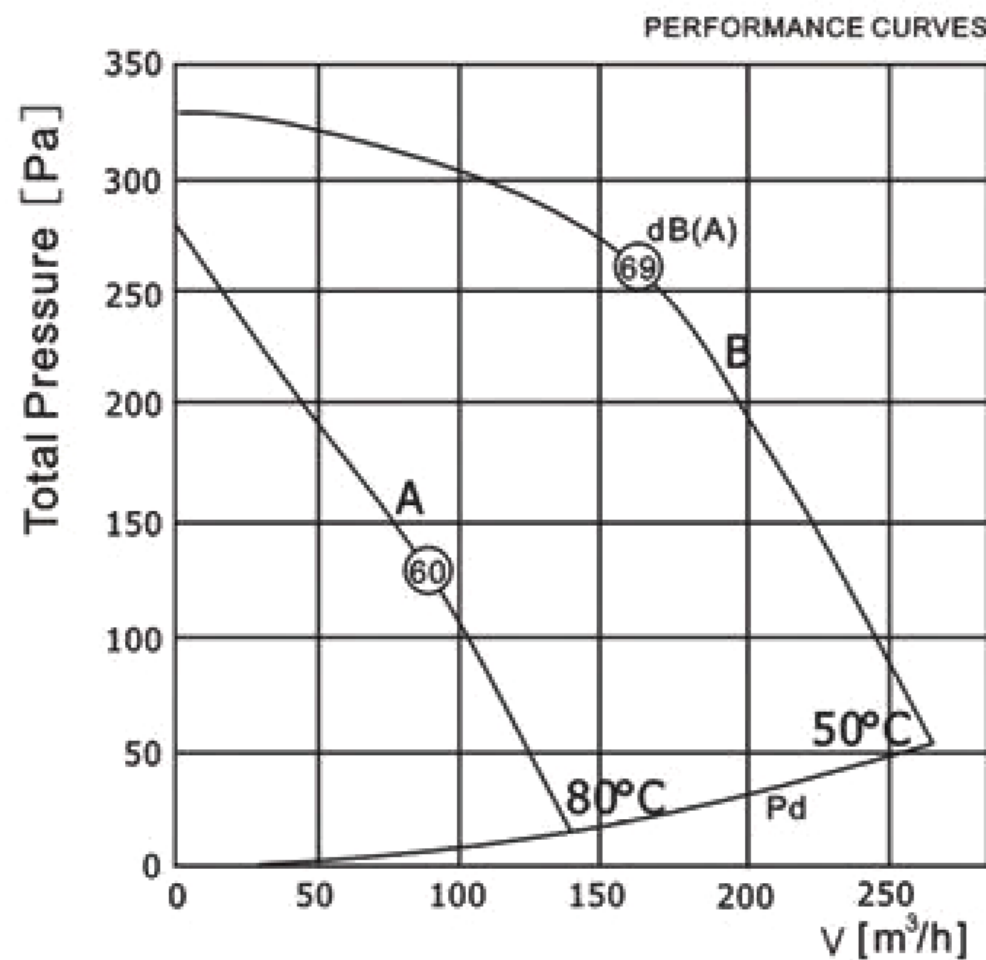

Product Drawing (mm)

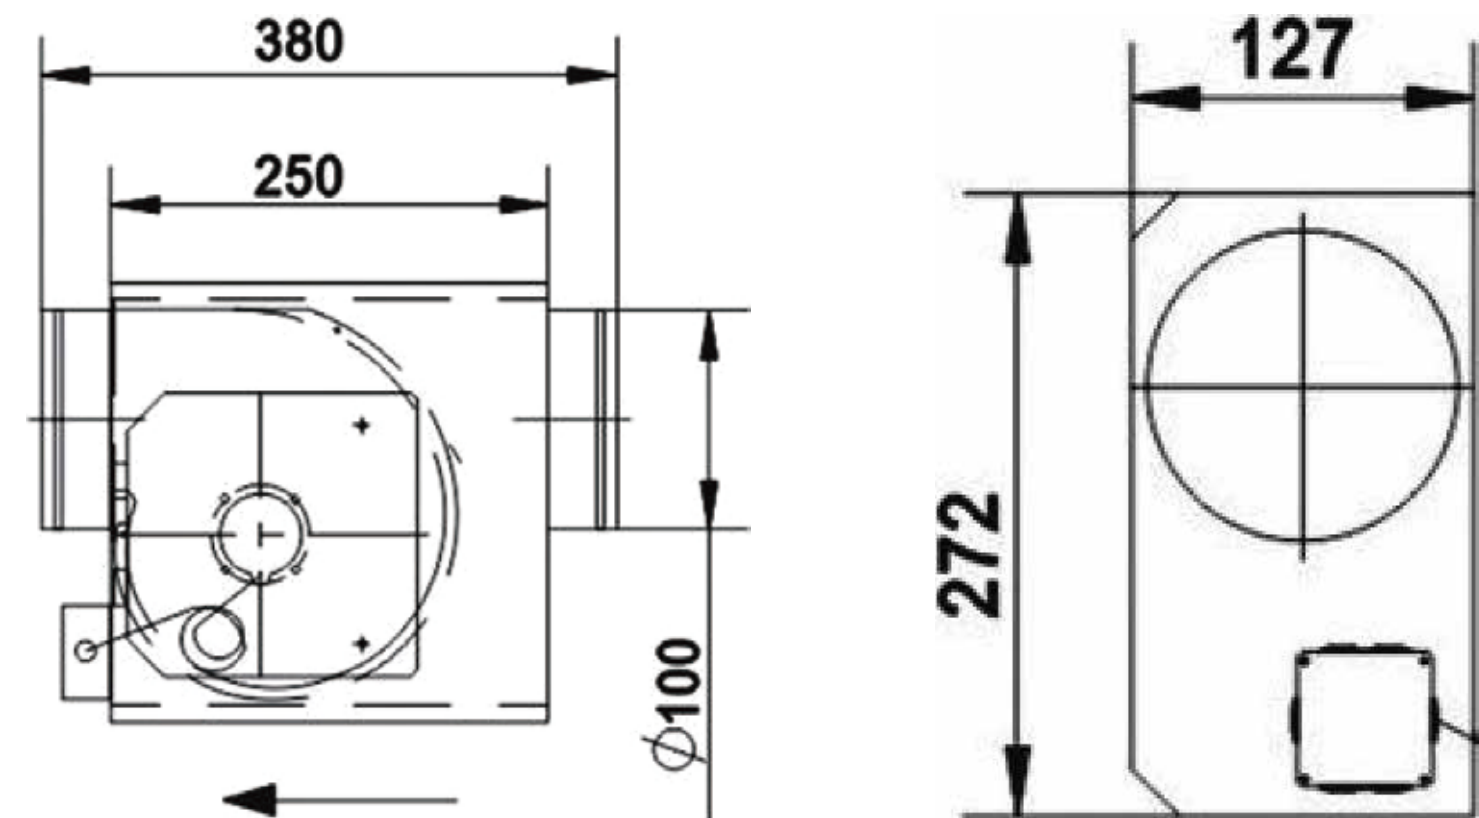

Sound Data

△dB(A)	LWA tot	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	8KHz
LWA2	-15	-25	-20	-23	-22	-24	-26	-28
LWA5	-4	-10	-11	-12	-12	-16	-19	-27
LWA6	0	10	-8	-7	-4	-8	-14	-22