

LWDA125 Series


Product Characteristic

- Material: Galvanized Sheet Steel
- Supply Voltage: 230V,50Hz
- Direction of rotation: Clockwise,see on the lead
- Protection Class: IP54
- Insulation Class: F
- Operation Temperature: -10℃~+80℃
- Bearing: Ball Bearing
- Protection: Thermal Overload Protector(TOP)wired internally




Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Capacitor (μF)	Weight (Kg)	Wiring Diagram
LWDA125S-B01	230	50	57	0.25	2550	2	6.5	001

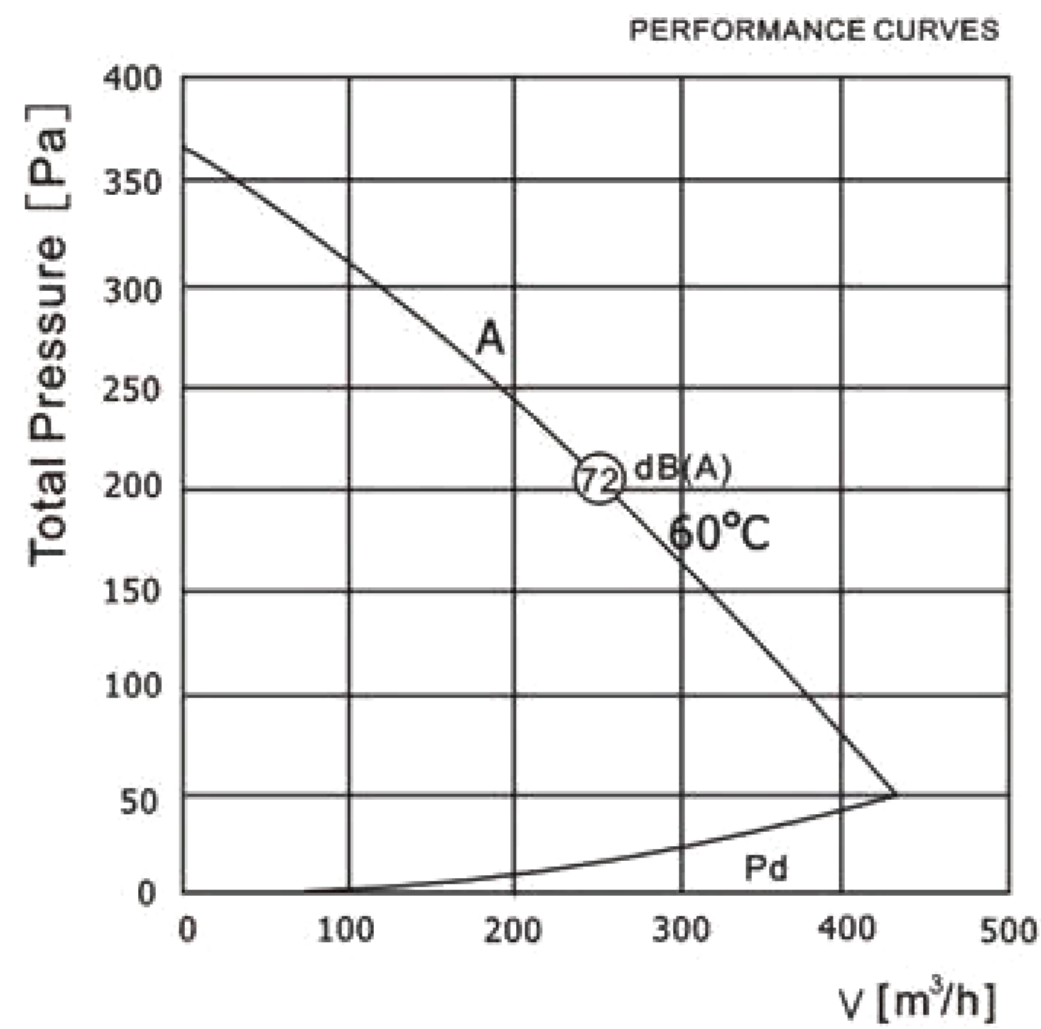

Product Drawing (mm)

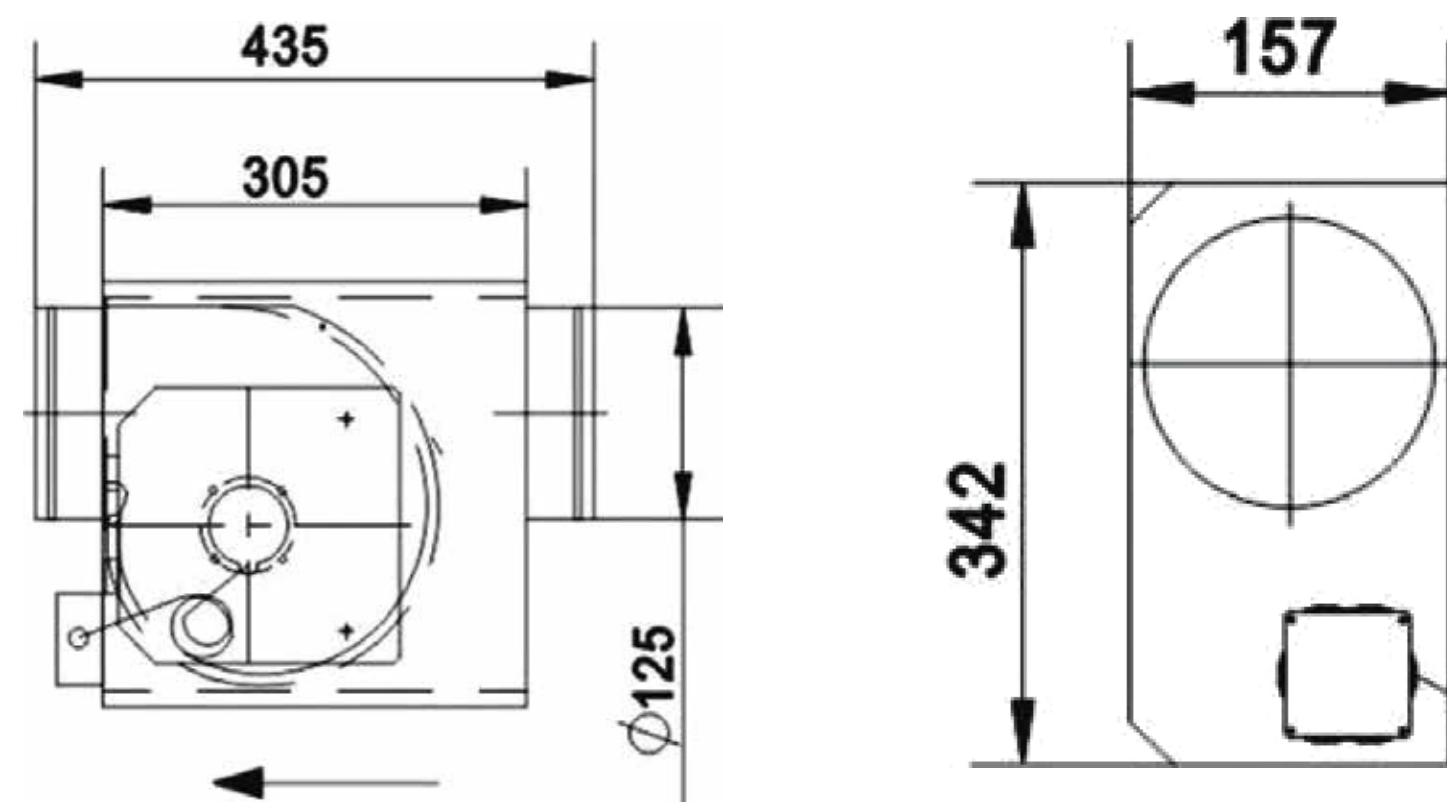

Sound Data

△dB(A)	LWA tot	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	8KHz
LWA2	-12	-37	-14	-20	-24	-28	-35	-42
LWA5	-2	-12	-9	-6	-15	-20	-19	-26
LWA6	0	-11	-4	-4	-8	-13	-16	-23