

LWDA125 Series

Product Characteristic

- Material:

Galvanized Sheet Steel
- Supply Voltage:

230V,50Hz
- Direction of rotation:

Clockwise,see on the lead
- Protection Class:

IP54
- Insulation Class:

F
- Operation Temperature:


-10℃~+80℃
- Bearing:

Ball Bearing
- Protection:

Thermal Overload Protector(TOP)wired internally




Product Drawing (mm)

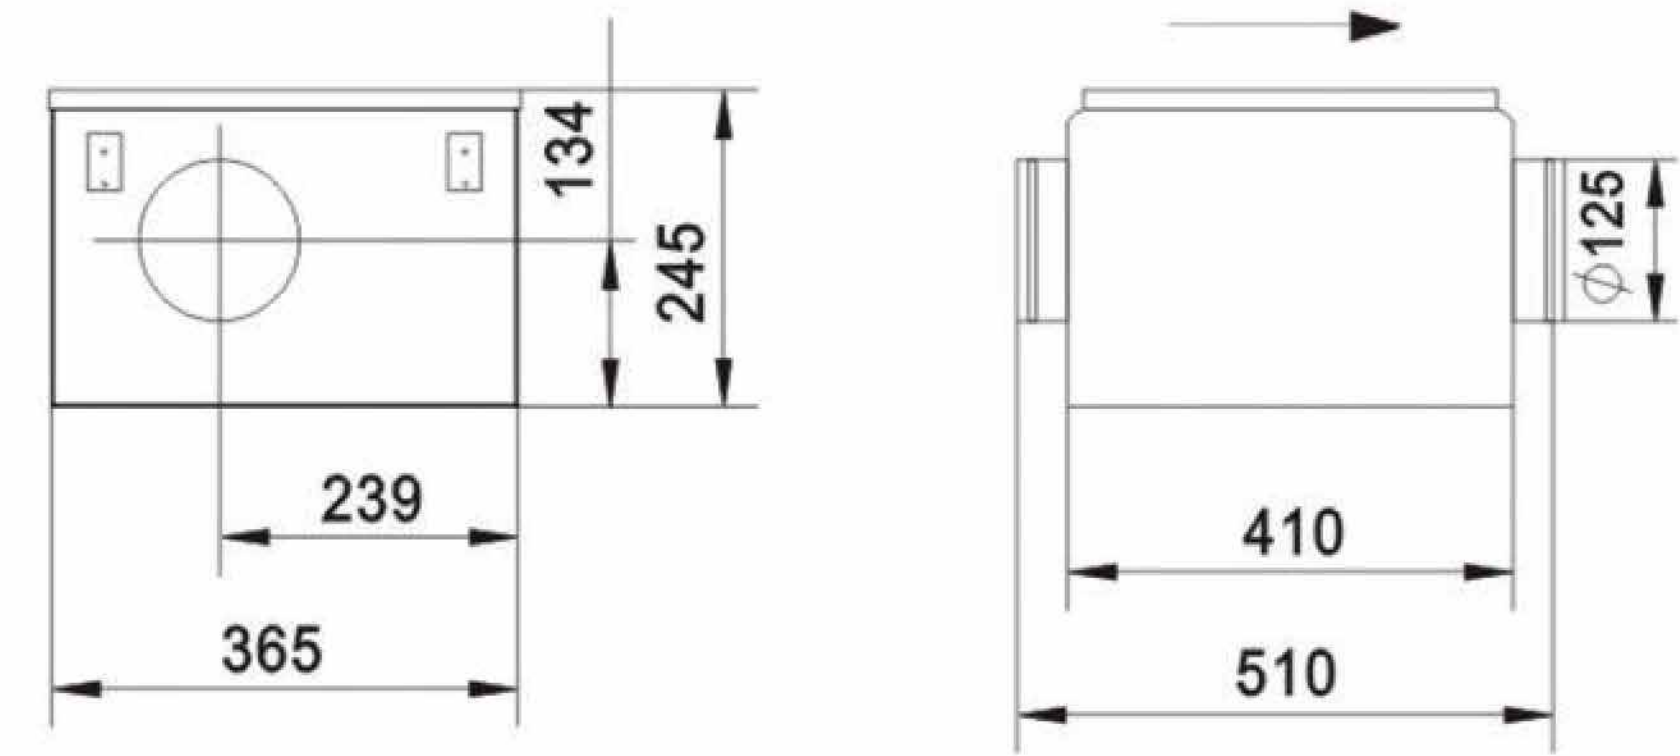

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Capacitor (μF)	Weight (Kg)	Wiring Diagram
LWDA125S-F01	230	50	61	0.27	1130	4	12	001
LWDA125S-F02	230	50	99	0.42	1650	2	12	001
LWDA125S-F03	230	50	122	0.53	1850	4	12	001

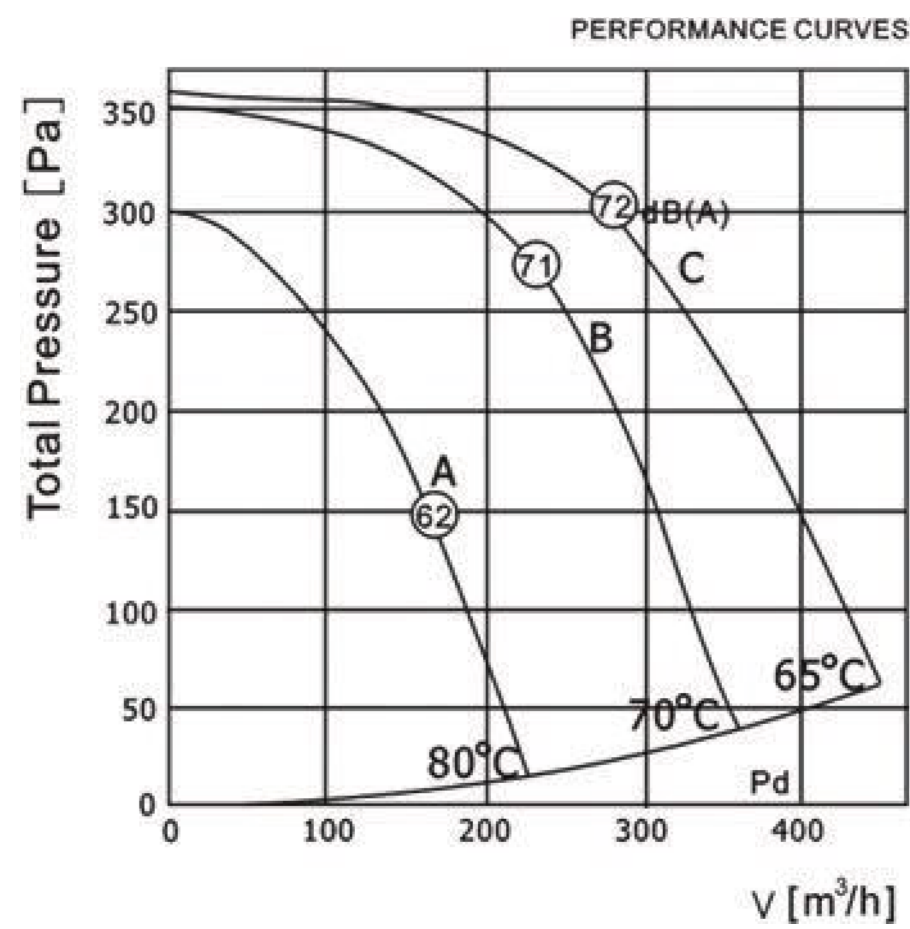

Sound Data

△dB(A)	LWA tot	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	8KHz
LWA2	-26	-34	-28	-34	-36	-40	-41	-41
LWA5	-8	-11	-13	-16	-24	-27	-31	-41
LWA6	0	-8	-7	-5	-6	-8	-15	-25