

LWDA125 Series


Product Characteristic

- Material: Galvanized Sheet Steel
- Supply Voltage: 230V,50Hz
- Direction of rotation: Clockwise,see on the lead
- Protection Class: IP54
- Insulation Class: F
- Operation Temperature: -10℃~+80℃
- Bearing: Ball Bearing
- Protection: Thermal Overload Protector(TOP)wired internally




Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Capacitor (μF)	Weight (kg)	Wiring Diagram
LWDA125S-F04	230	50	47	0.21	1050	4	3.8	001
LWDA125S-F05	230	50	100	0.44	1450	2	3.8	001

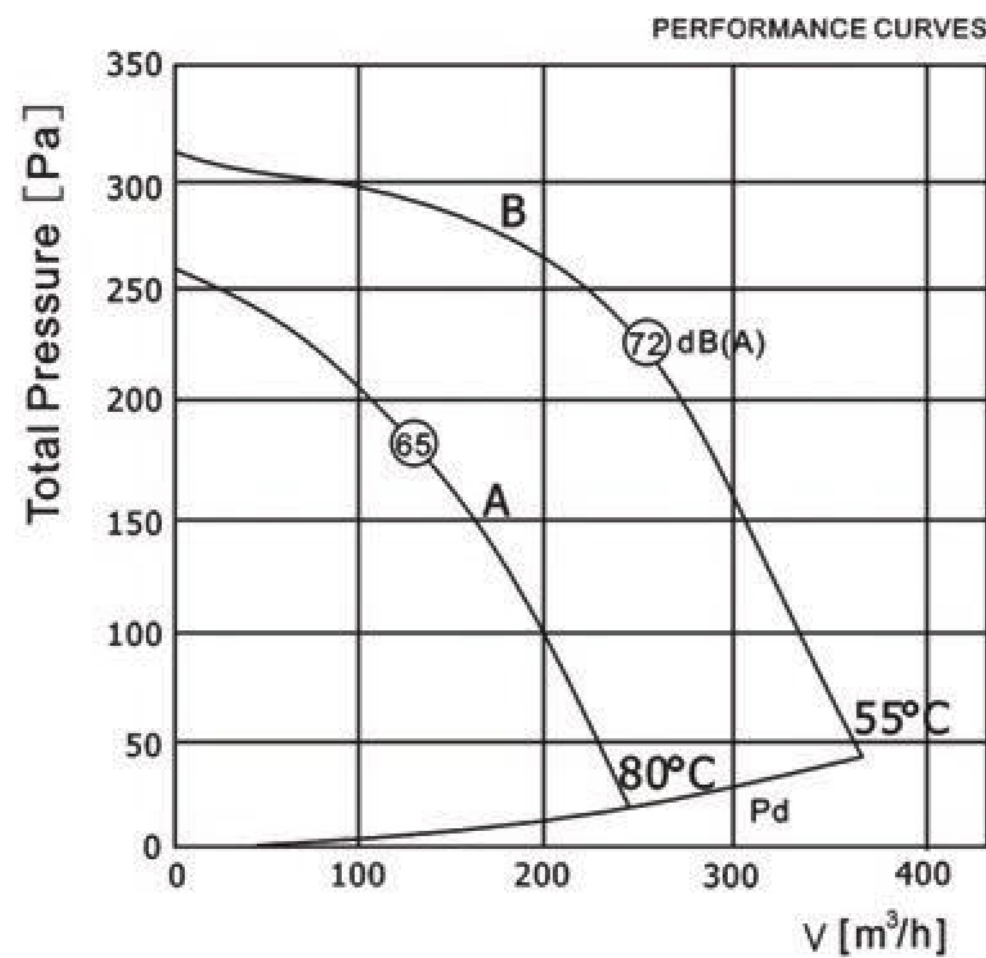

Product Drawing (mm)

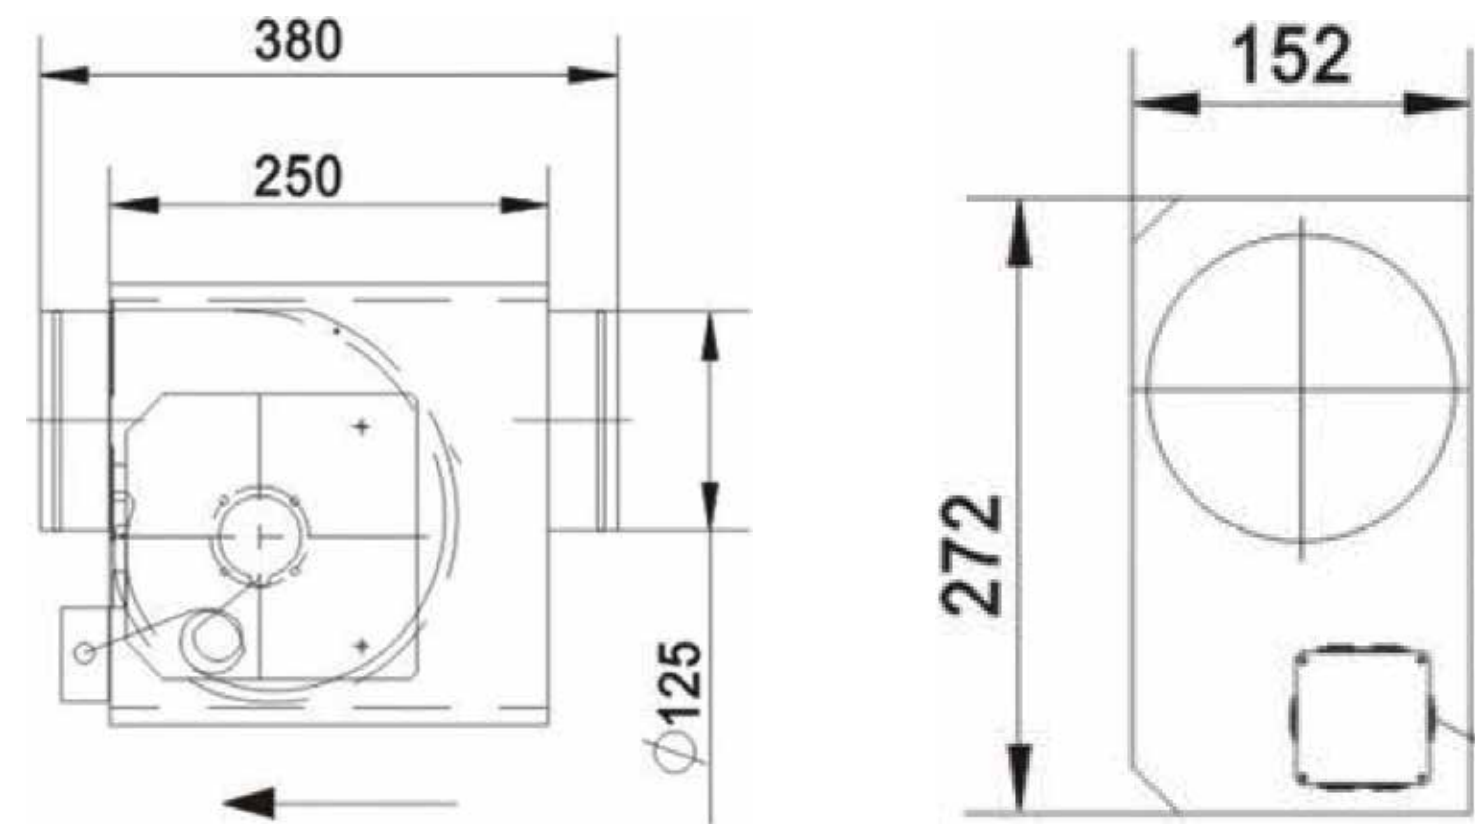

Sound Data

△dB(A)	LWA tot	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	8KHz
LWA2	-14	-30	-22	-22	-19	-21	-26	-31
LWA5	-3	-13	-11	-9	-9	-13	-19	-32
LWA6	0	-12	-8	-7	-4	-9	-14	-23