

LWDA160 Series

Product Characteristic

- Material:

Galvanized Sheet Steel
- Supply Voltage:

230V,50Hz
- Direction of rotation:

Clockwise,see on the lead
- Protection Class:

IP54
- Insulation Class:

F
- Operation Temperature:

-10℃~+80℃
- Bearing:


Ball Bearing
- Protection:

Thermal Overload Protector(TOP)wired internally




Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Capacitor (μF)	Weight (Kg)	Wiring Diagram
LWDA160S-F01	230	50	105	0.46	1650	2	13	001
LWDA160S-F02	230	50	127	0.55	1850	4	13	001
LWDA160S-F03	230	50	157	0.68	2200	4	13	001

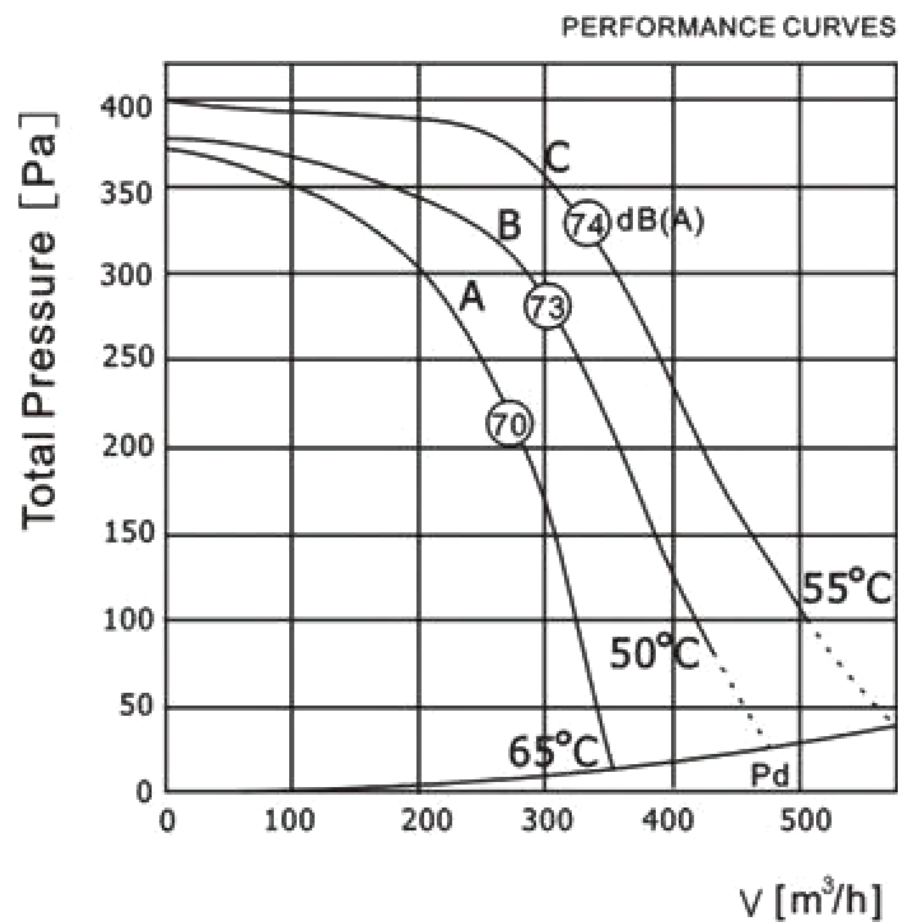

Product Drawing (mm)

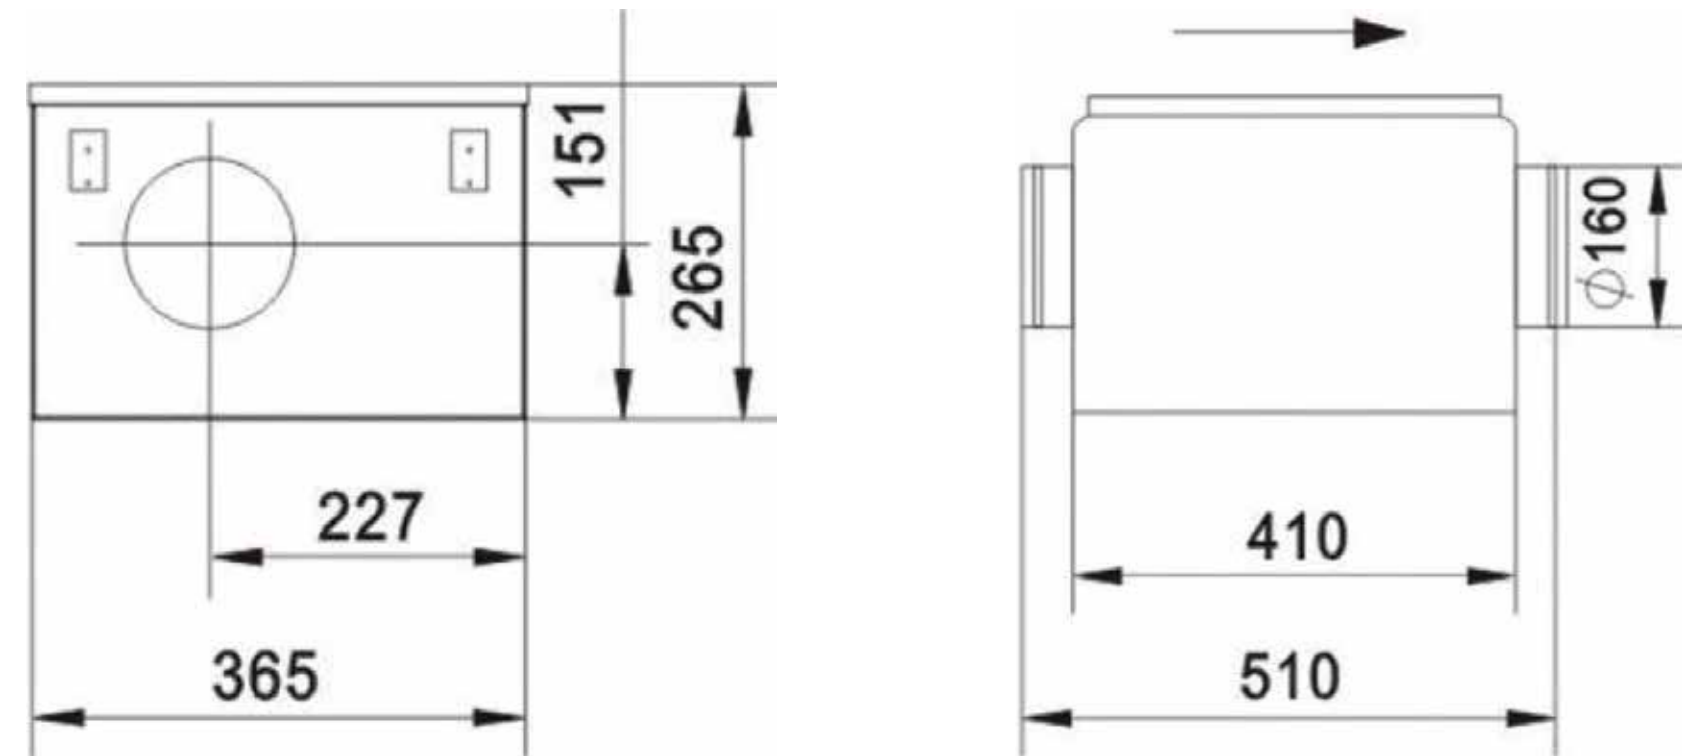

Sound Data

△dB(A)	LWA tot	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	8KHz
LWA2	-26	-32	-30	-33	-36	-40	-42	-42
LWA5	-7	-9	-12	-17	-23	-28	-32	-40
LWA6	0	-8	-7	-6	-7	-9	-15	-23