

LWDA160 Series


Product Characteristic

- Material: Galvanized Sheet Steel
- Supply Voltage: 230V,50Hz
- Direction of rotation: Clockwise,see on the lead
- Protection Class: IP44/IP20
- Insulation Class: B
- Operation Temperature: -10℃~+80℃
- Bearing: Ball Bearing
- Protection: Thermal Overload Protector(TOP)wired internally




Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Capacitor (μF)	Weight (Kg)	Wiring Diagram
LWDA160S-F04	230	50	225	0.7	2600	4	20	001

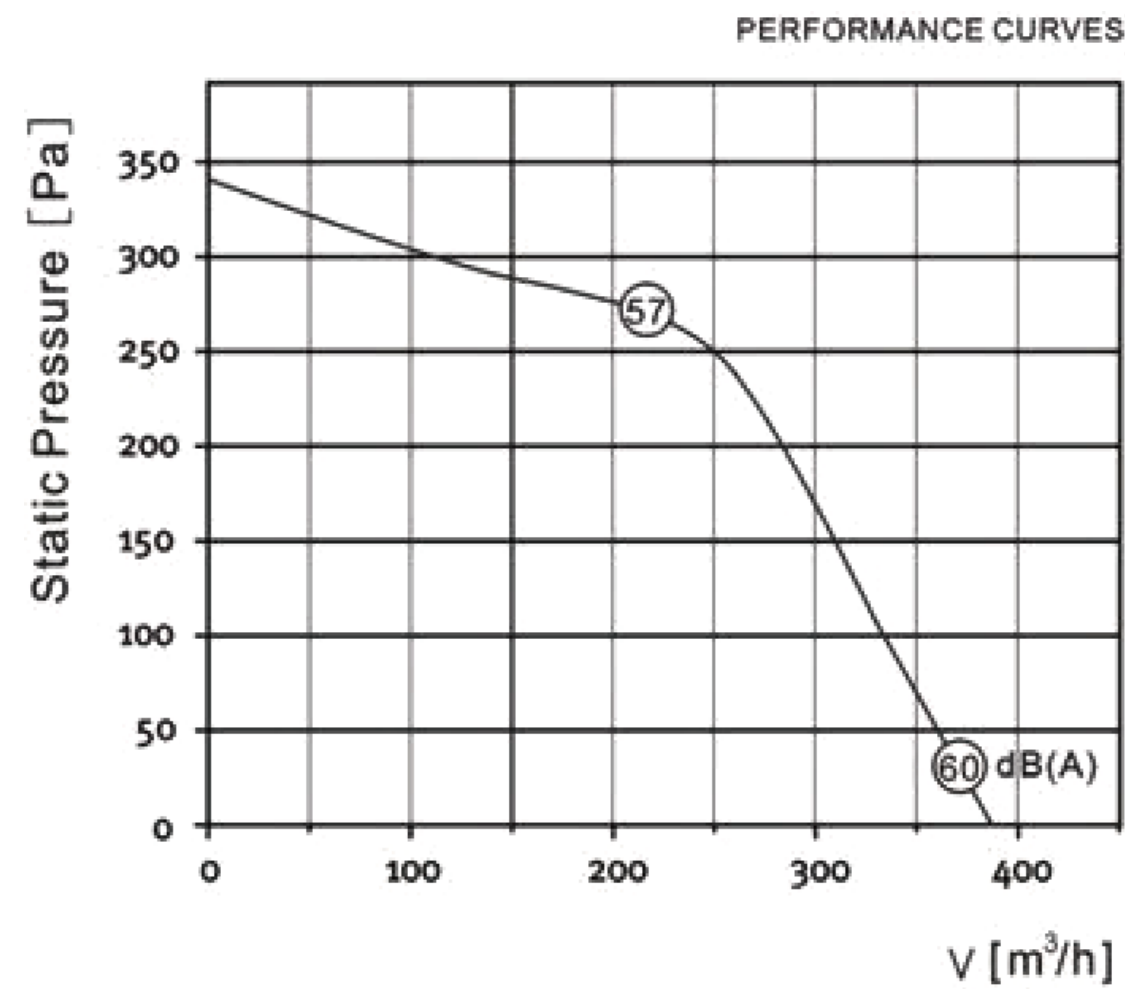

Product Drawing (mm)

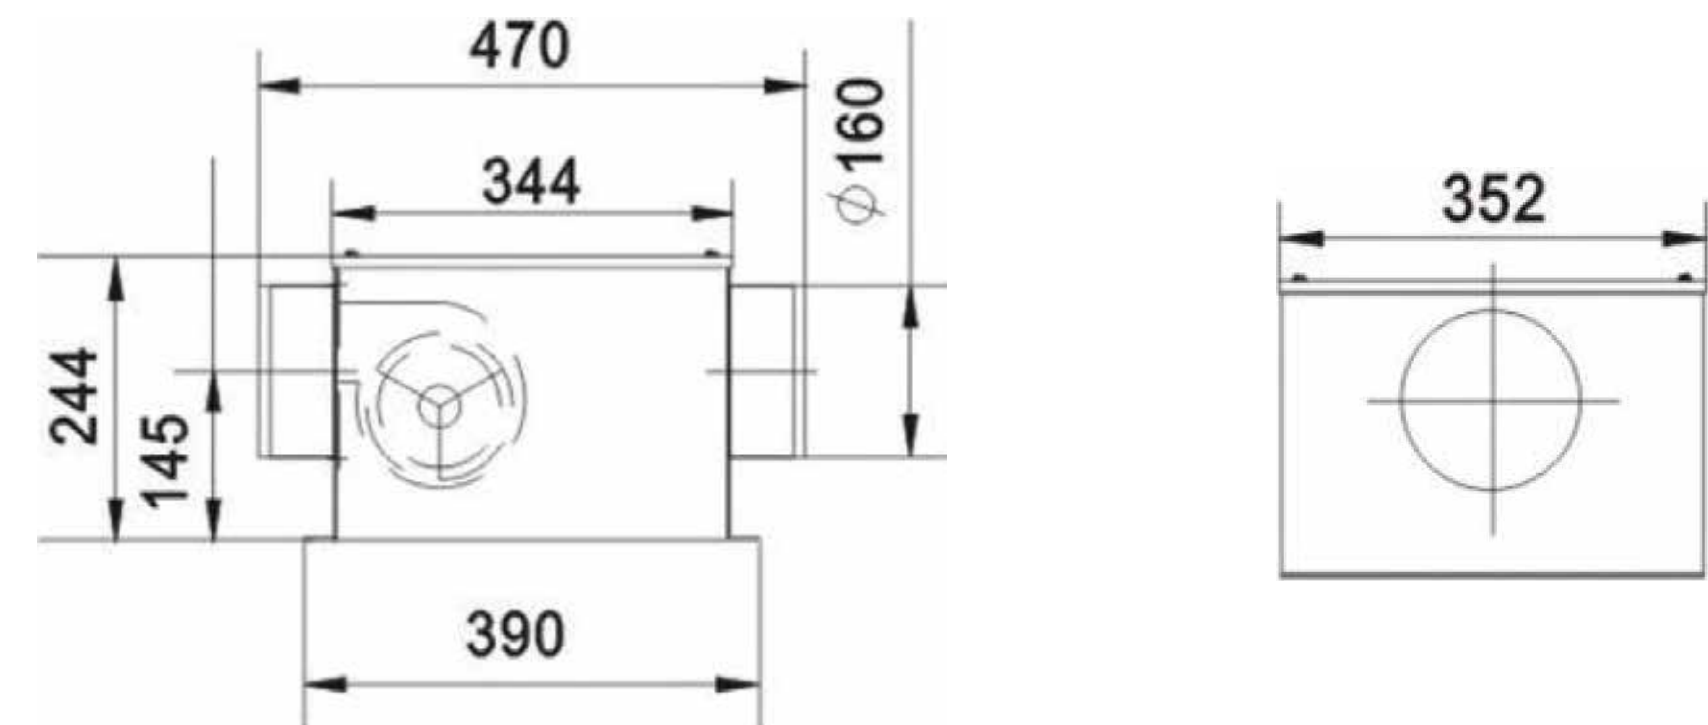

Sound Data

△dB(A)	LWA tot	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	8KHz
LWA2	-26	-32	-30	-31	-36	-38	-42	-44
LWA5	-7	-9	-11	-15	-22	-24	-27	-35
LWA6	0	-8	-7	-5	-7	-8	-15	-21