

LWDA200 Series


Product Characteristic

- Material: Galvanized Sheet Steel
- Supply Voltage: 230V,50Hz
- Direction of rotation: Clockwise,see on the lead
- Protection Class: IP54
- Insulation Class: F
- Operation Temperature: -10℃ ~+80℃
- Bearing: Ball Bearing
- Protection: Thermal Overload Protector(TOP)wired internally




Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Capacitor (μF)	Weight (Kg)	Wiring Diagram
LWDA200S-B01	230	50	139	0.6	2420	5	8.5	001

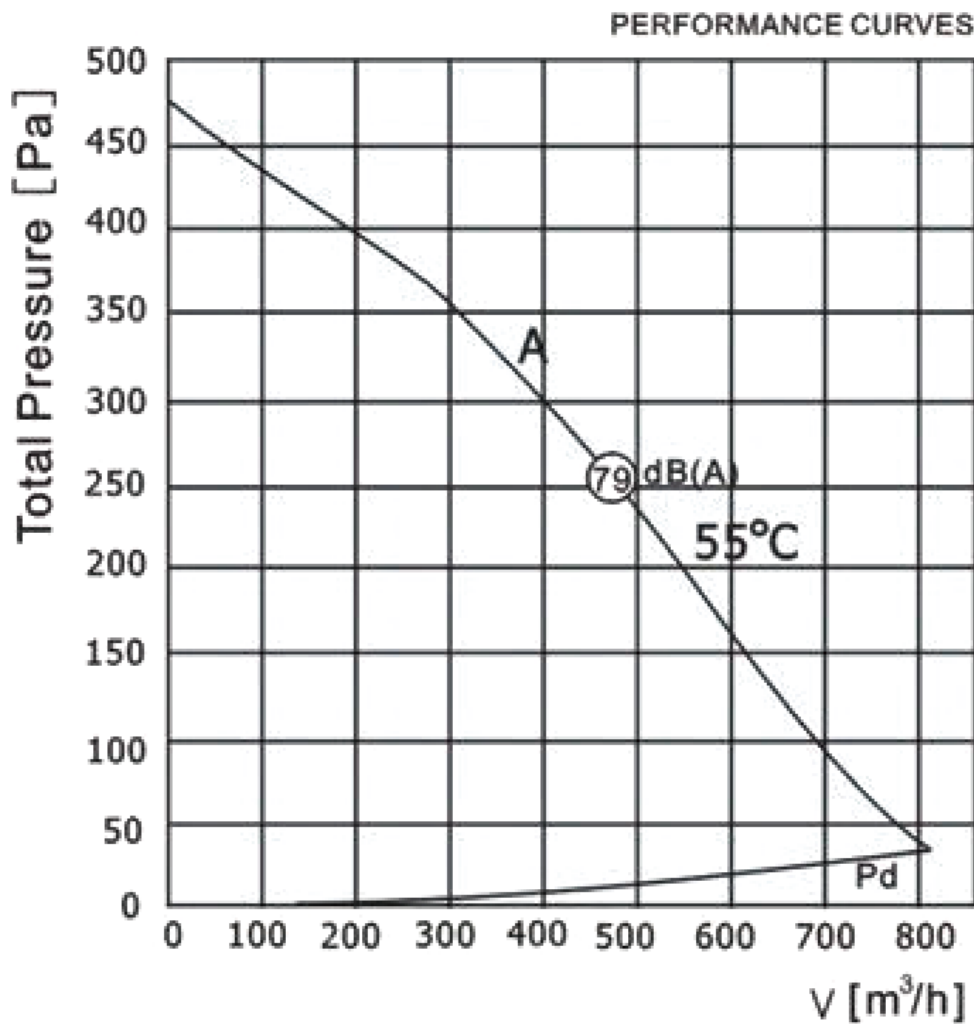

Product Drawing (mm)

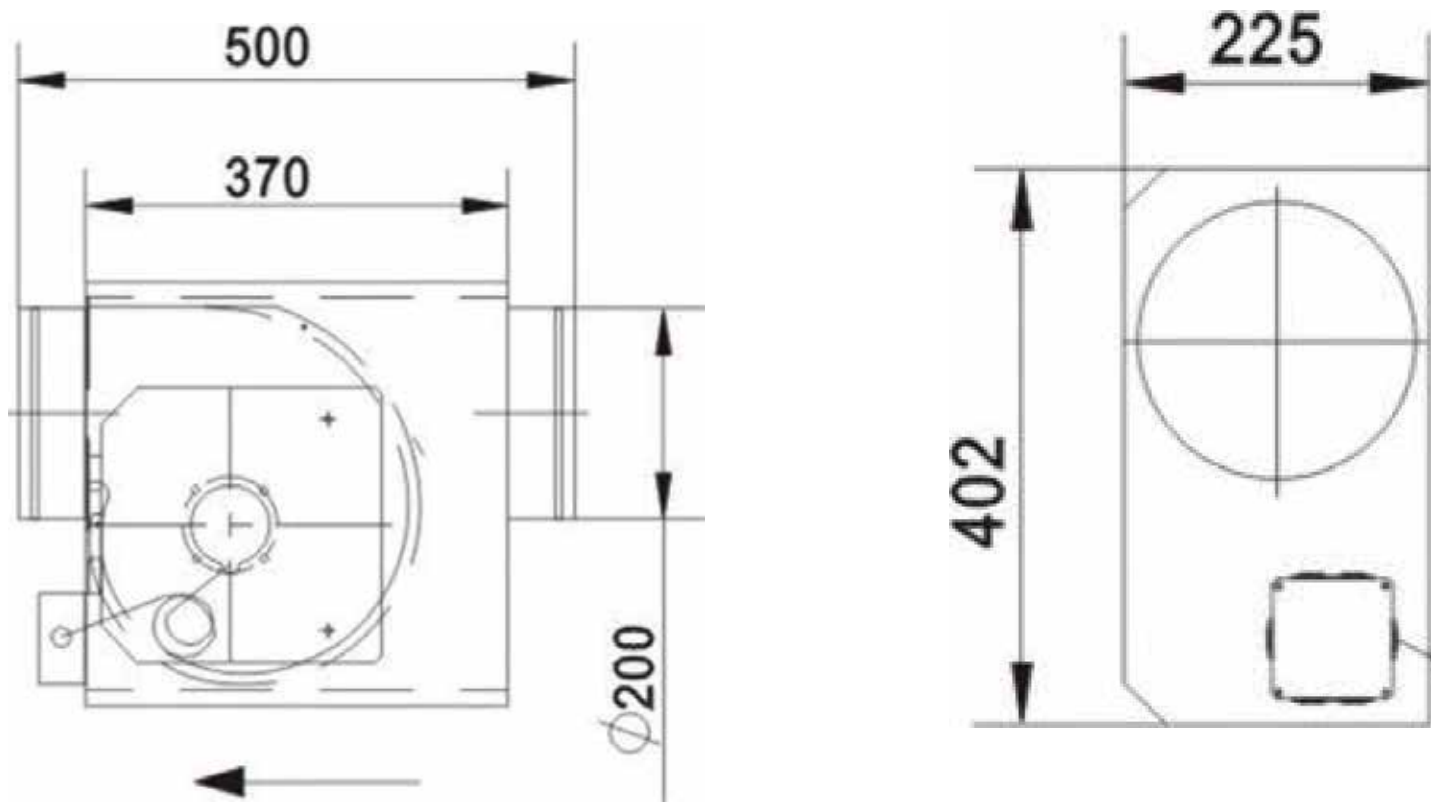

Sound Data

ΔdB(A)	LWA tot	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	8KHz
LWA2	-16	-37	-27	-17	-28	-30	-35	-42
LWA5	-4	-14	-14	-5	-17	-19	-18	-22
LWA6	0	-13	-11	-3	-10	-11	-14	-20