


LWDA200 Series

Product Characteristic

- Material: Galvanized Sheet Steel
- Supply Voltage: 230V,50Hz
- Direction of rotation: Clockwise,see on the lead
- Protection Class: IP54
- Insulation Class: F
- Operation Temperature: -10℃ ~+80℃
- Bearing: Ball Bearing
- Protection: Thermal Overload Protector(TOP)wired internally




Product Drawing (mm)

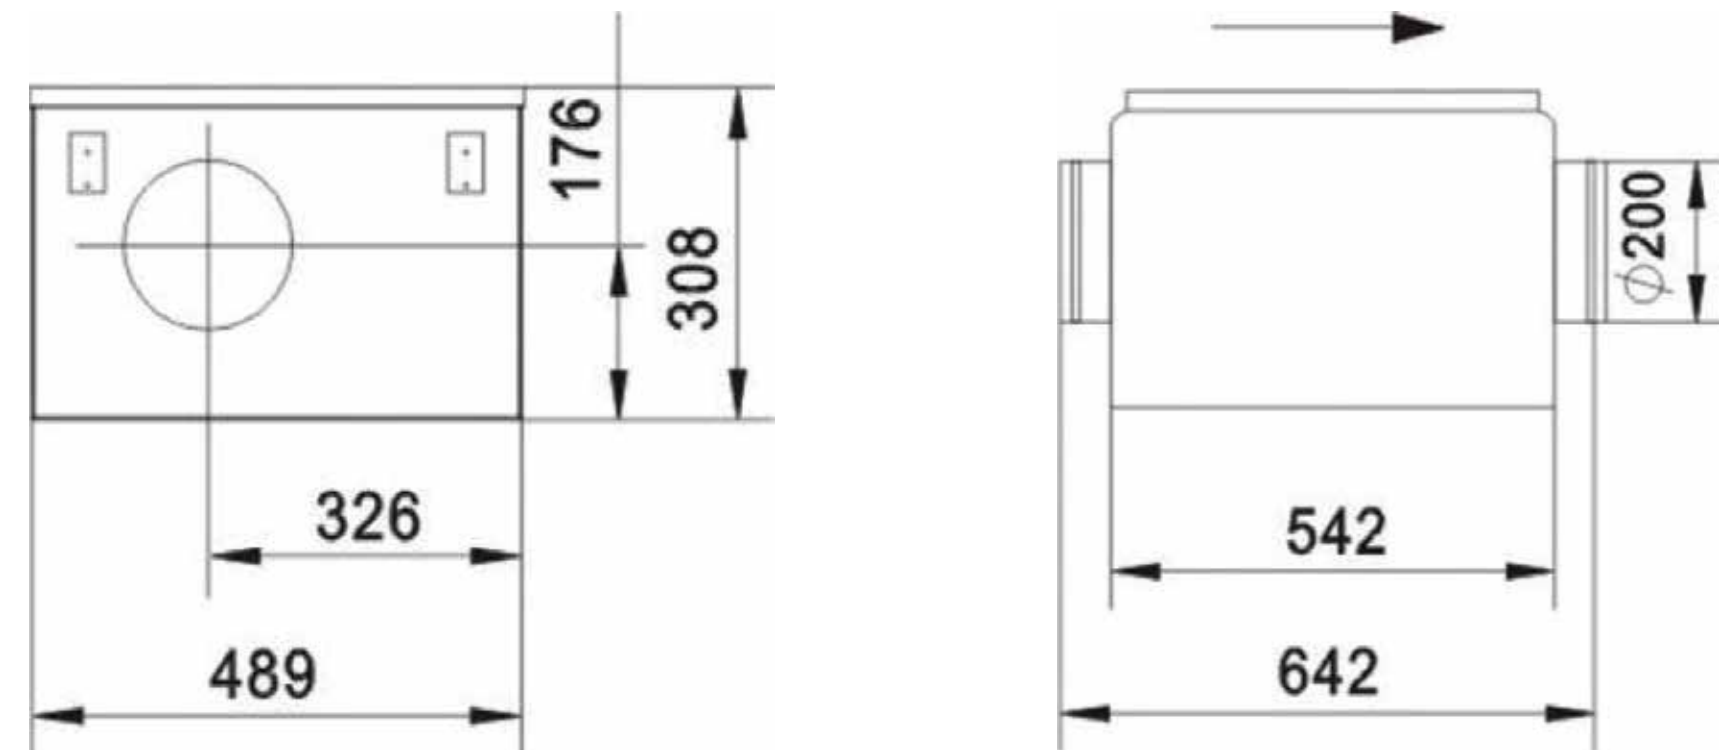

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Capacitor (μF)	Weight (Kg)	Wiring Diagram
LWDA200S-F01	230	50	124	0.55	2540	4	22	001
LWDA200S-F02	230	50	157	0.69	2600	4	22	001

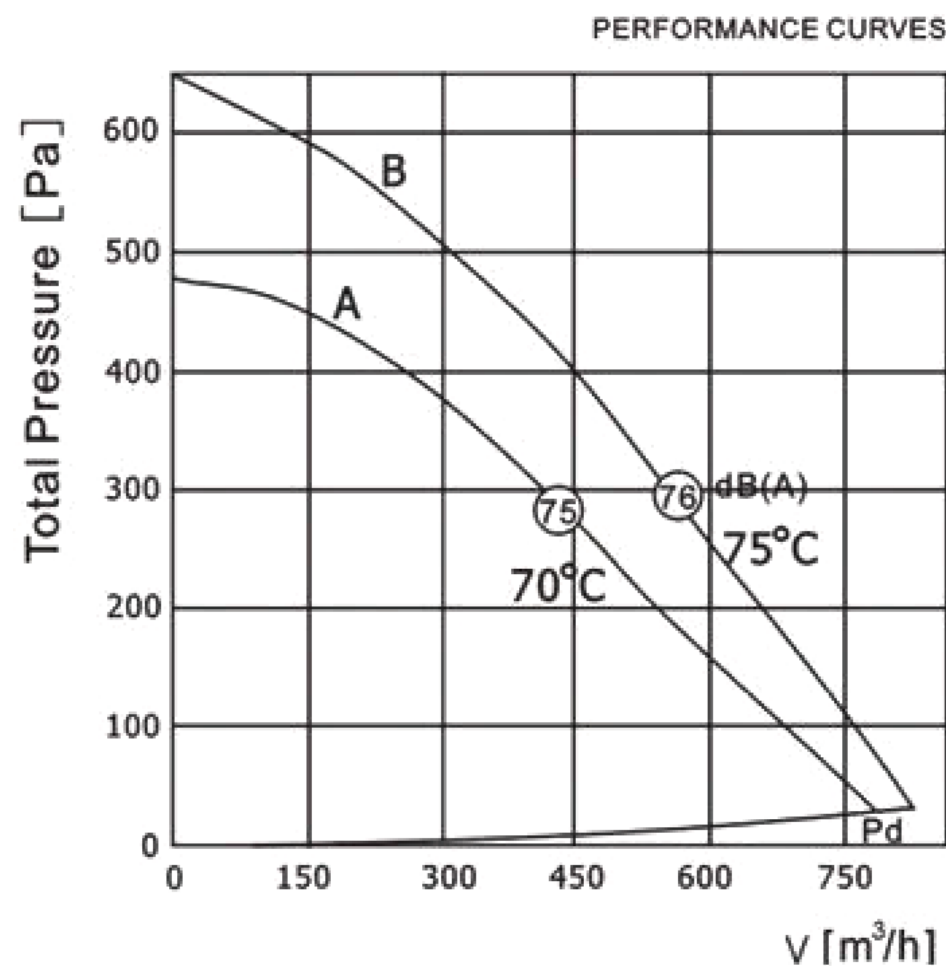

Sound Data

△dB(A)	LWA tot	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	8KHz
LWA2	-24	-36	-29	-27	-36	-37	-40	-42
LWA5	-12	-20	-15	-16	-22	-28	-33	-43
LWA6	0	-12	-7	-3	-6	-9	-16	-28