

LWDA200 Series


Product Characteristic

- Material: Galvanized Sheet Steel
- Supply Voltage: 230V,50Hz
- Direction of rotation: Clockwise,see on the lead
- Protection Class: IP54
- Insulation Class: F
- Operation Temperature: -10℃~+80℃
- Bearing: Ball Bearing
- Protection: Thermal Overload Protector(TOP)wired internally




Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Capacitor (μF)	Weight (kg)	Wiring Diagram
LWDA200S-F04	230	50	110	0.48	925	3	5.2	001
LWDA200S-F05	230	50	175	0.77	1100	6	5.2	001

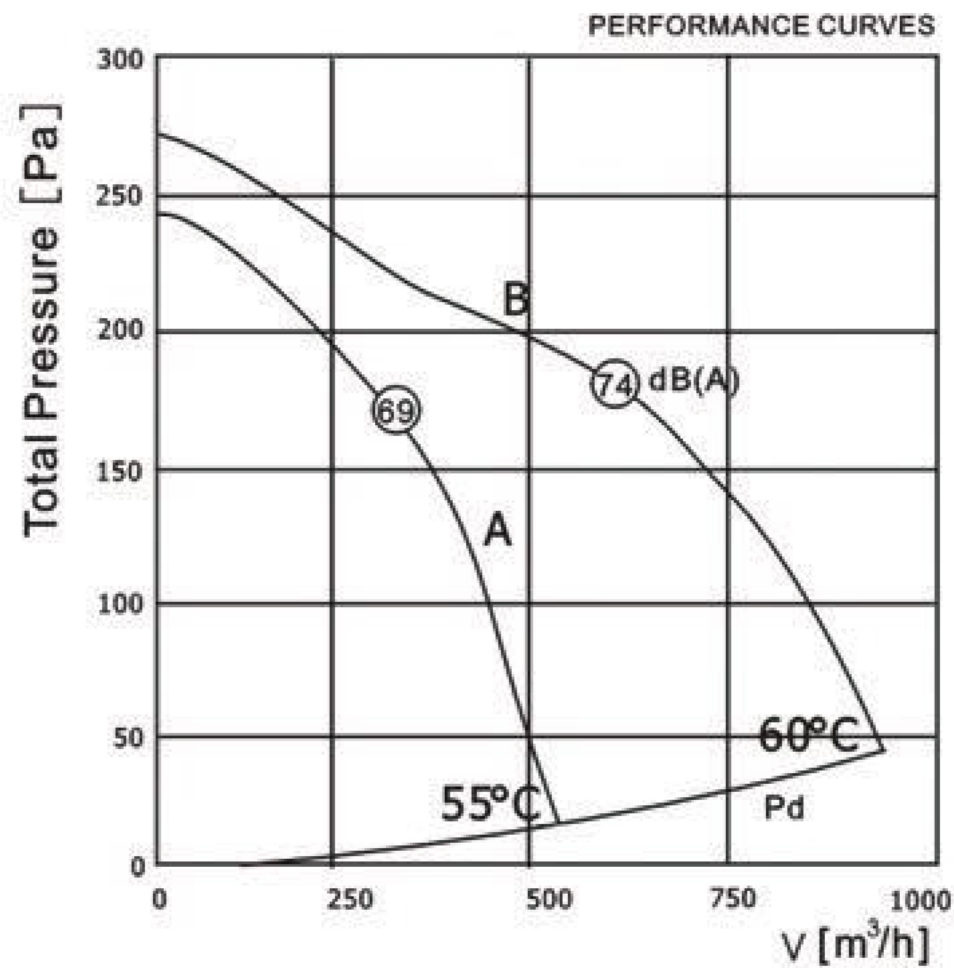

Product Drawing (mm)

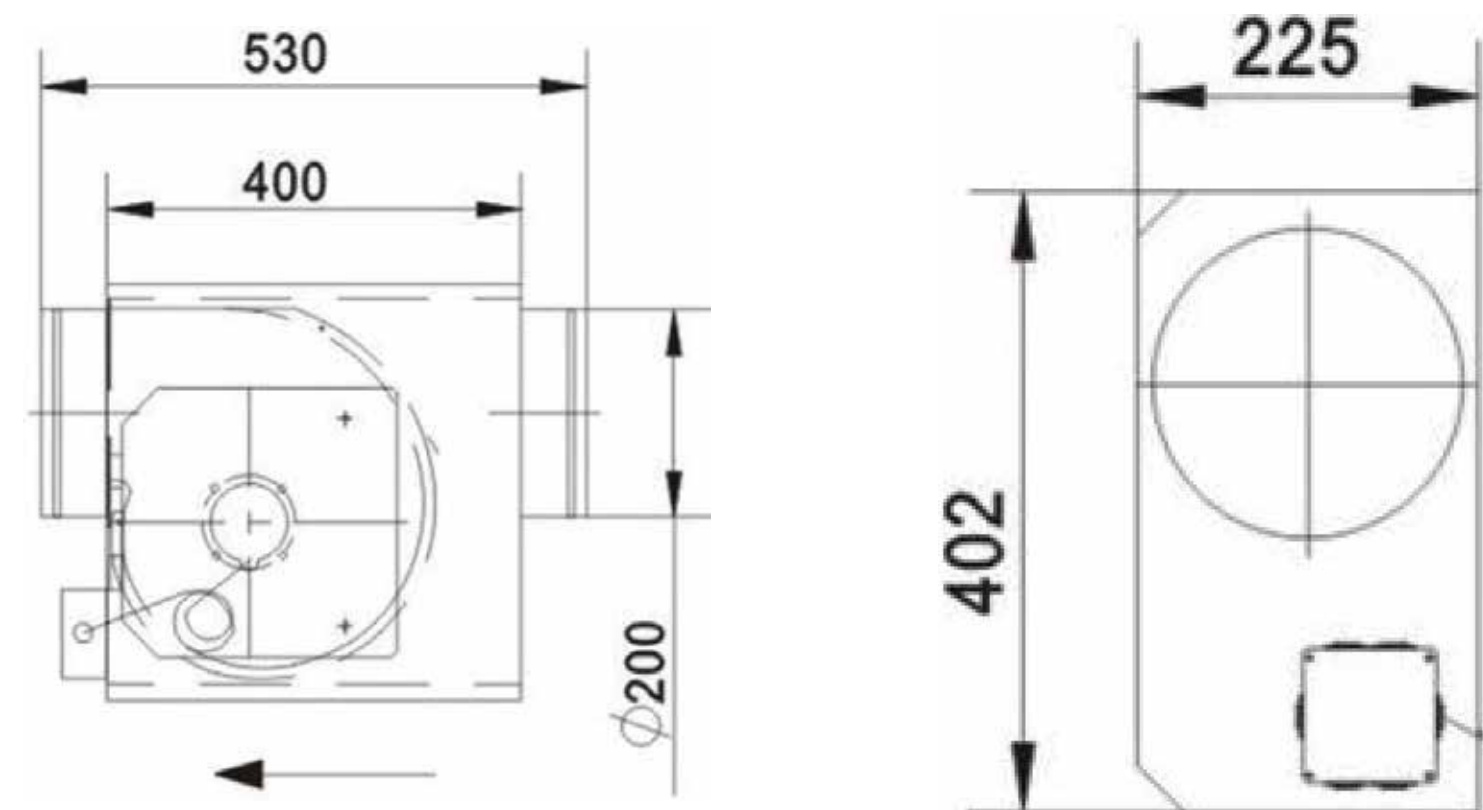

Sound Data

△dB(A)	LWA tot	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	8KHz
LWA2	-14	-28	-27	-21	-19	-21	-24	-27
LWA5	-3	-9	-12	-9	-13	-14	-15	-21
LWA6	0	-7	-8	-6	-7	-9	-10	-16