


LWDA250 Series

Product Characteristic

- Material: Galvanized Sheet Steel
- Supply Voltage: 230V,50Hz
- Direction of rotation: Clockwise,see on the lead
- Protection Class: IP54
- Insulation Class: F
- Operation Temperature: -10℃ ~ +80℃
- Bearing: Ball Bearing
- Protection: Thermal Overload Protector(TOP)wired internally




Product Drawing (mm)

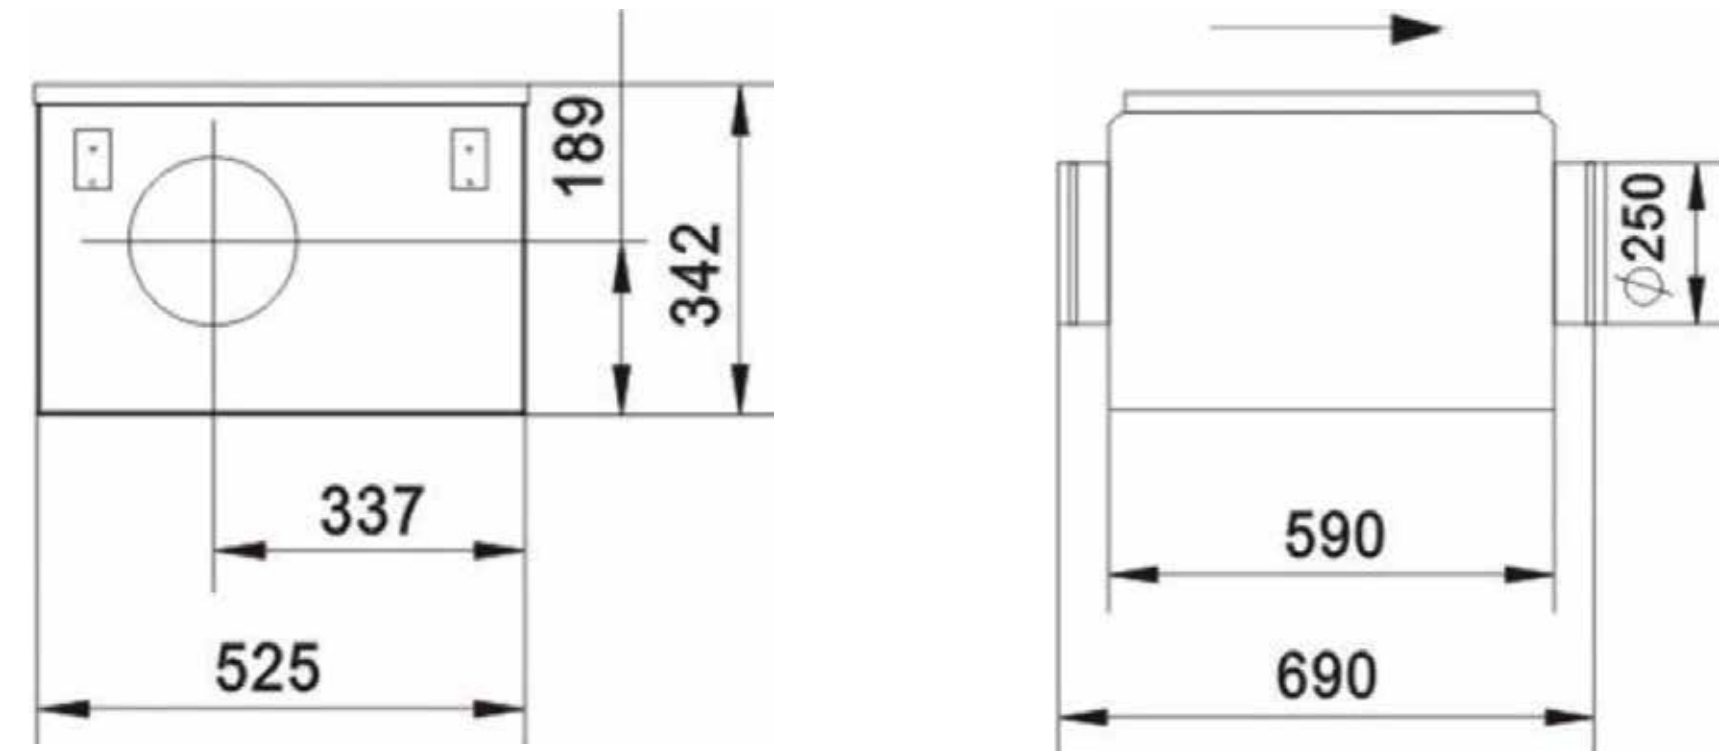

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Capacitor (μF)	Weight (Kg)	Wiring Diagram
LWDA250S-F01	230	50	154	0.67	2540	4	27	001
LWDA250S-F02	230	50	201	0.89	2420	5	27	001

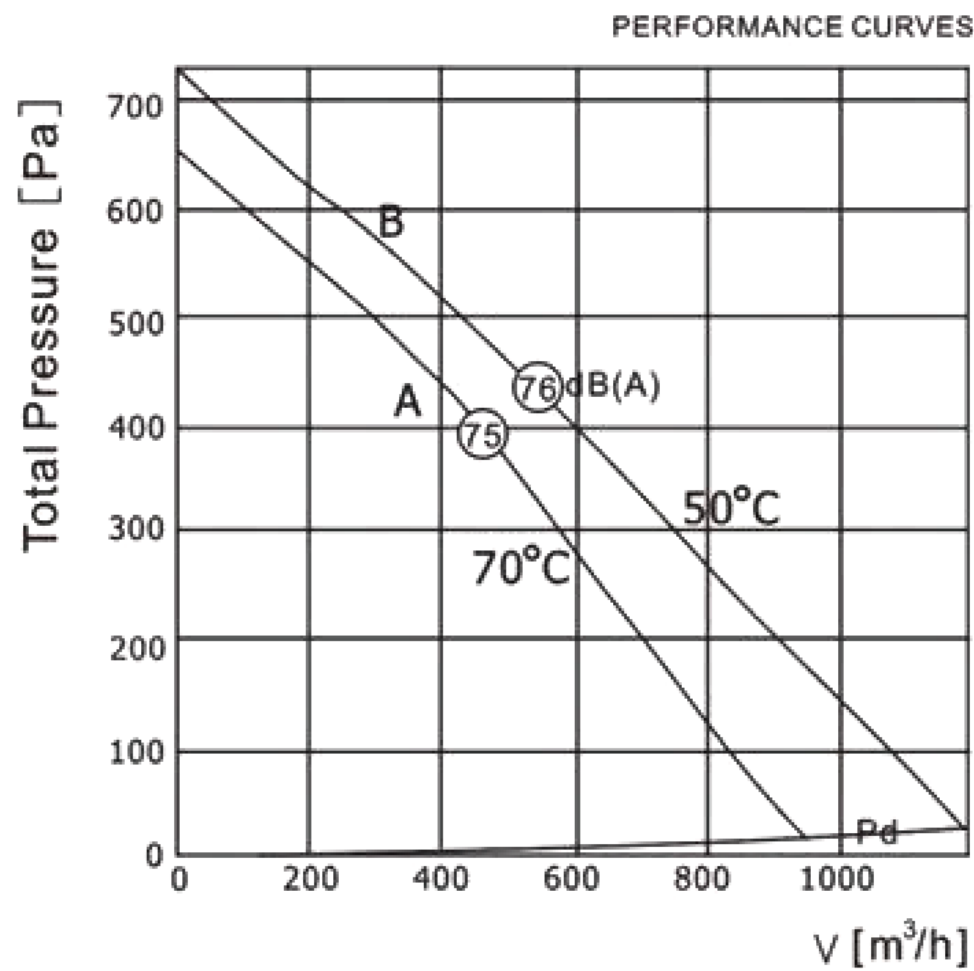

Sound Data

△dB(A)	LWA tot	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	8KHz
LWA2	-23	-33	-27	-28	-36	-34	-36	-34
LWA5	-12	-19	-16	-17	-23	-28	-30	-35
LWA6	0	-13	-9	-3	-6	-10	-15	-25