



LWDA250 Series

Product Characteristic

- Material: Galvanized Sheet Steel
- Supply Voltage: 230V,50Hz
- Direction of rotation: Clockwise,see on the lead
- Protection Class: IP54
- Insulation Class: F
- Operation Temperature: -10℃ ~+80℃
- Bearing: Ball Bearing
- Protection: Thermal Overload Protector(TOP)wired internally




Product Drawing (mm)

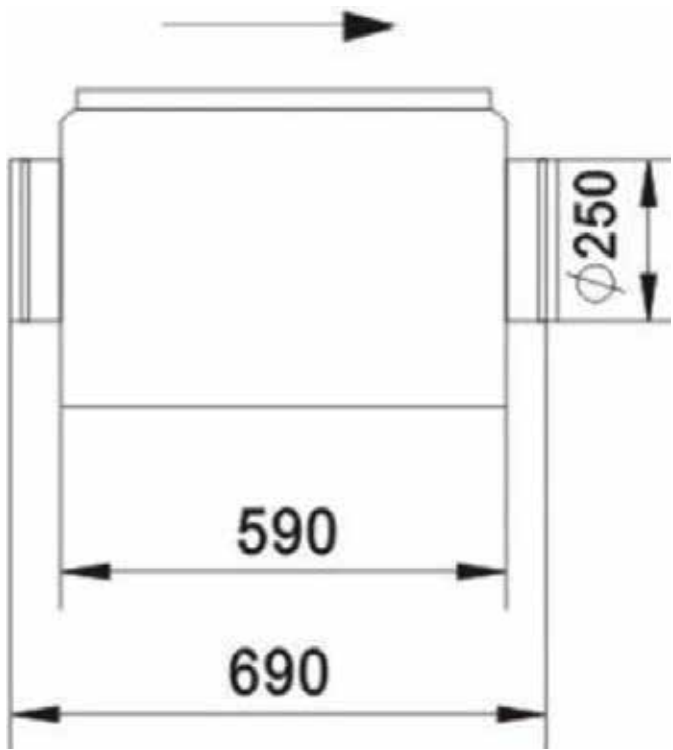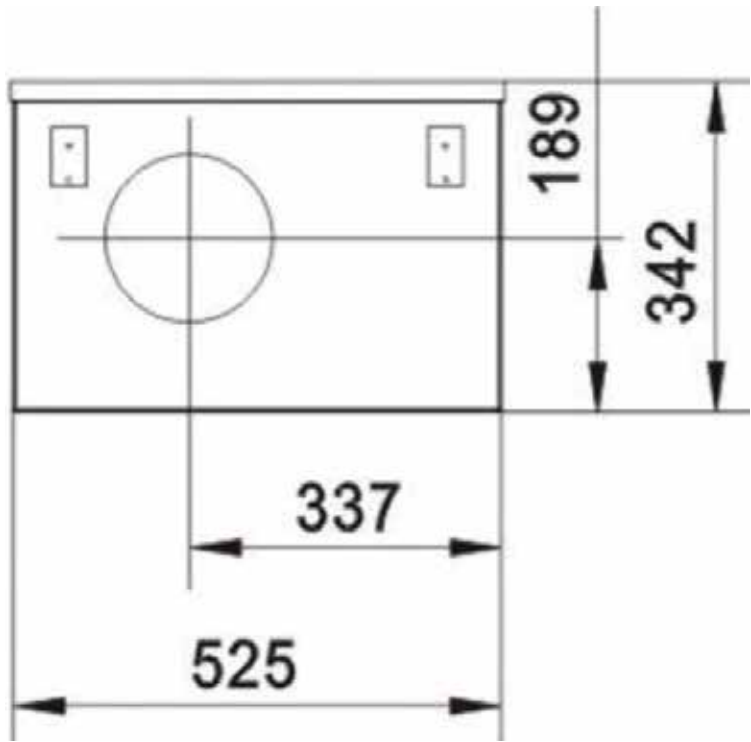

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Capacitor (μF)	Weight (Kg)	Wiring Diagram
LWDA250S-F03	230	50	138	0.63	900	3	30	001
LWDA250S-F04	230	50	378	1.72	1300	8	30	001

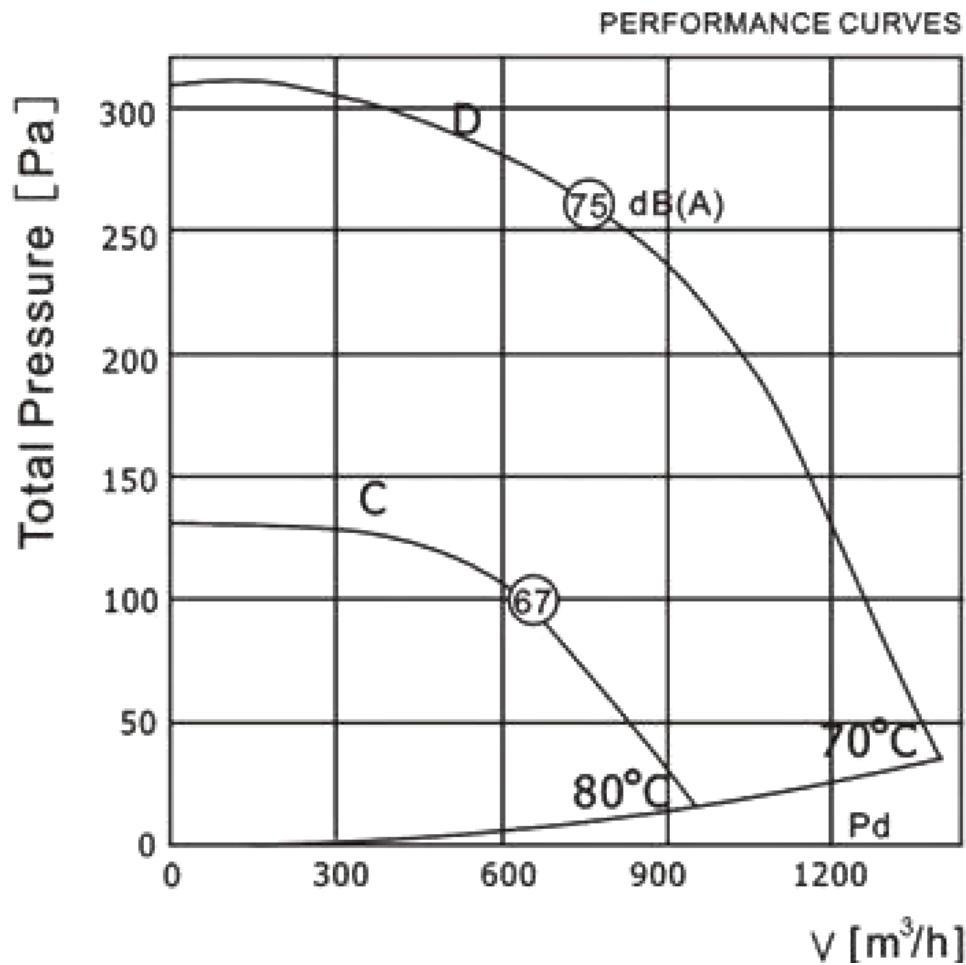

Sound Data

Δ dB(A)	LWA tot	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	8KHz
LWA2	-21	-25	-25	-30	-35	-36	-34	-32
LWA5	-8	-10	-15	-20	-25	-27	-33	-38
LWA6	0	-13	-9	-5	-5	-9	-11	-20