

LWDA315 Series


Product Characteristic

- Material: Galvanized Sheet Steel
- Supply Voltage: 230V,50Hz
- Direction of rotation: Clockwise,see on the lead
- Protection Class: IP44/IP20
- Insulation Class: B
- Operation Temperature: -10℃~+80℃
- Bearing: Ball Bearing
- Protection: Thermal Overload Protector(TOP)wired internally




Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Capacitor (μF)	Weight (Kg)	Wiring Diagram
LWDA315S-F03	230	50	640	3	1300	15	35	004

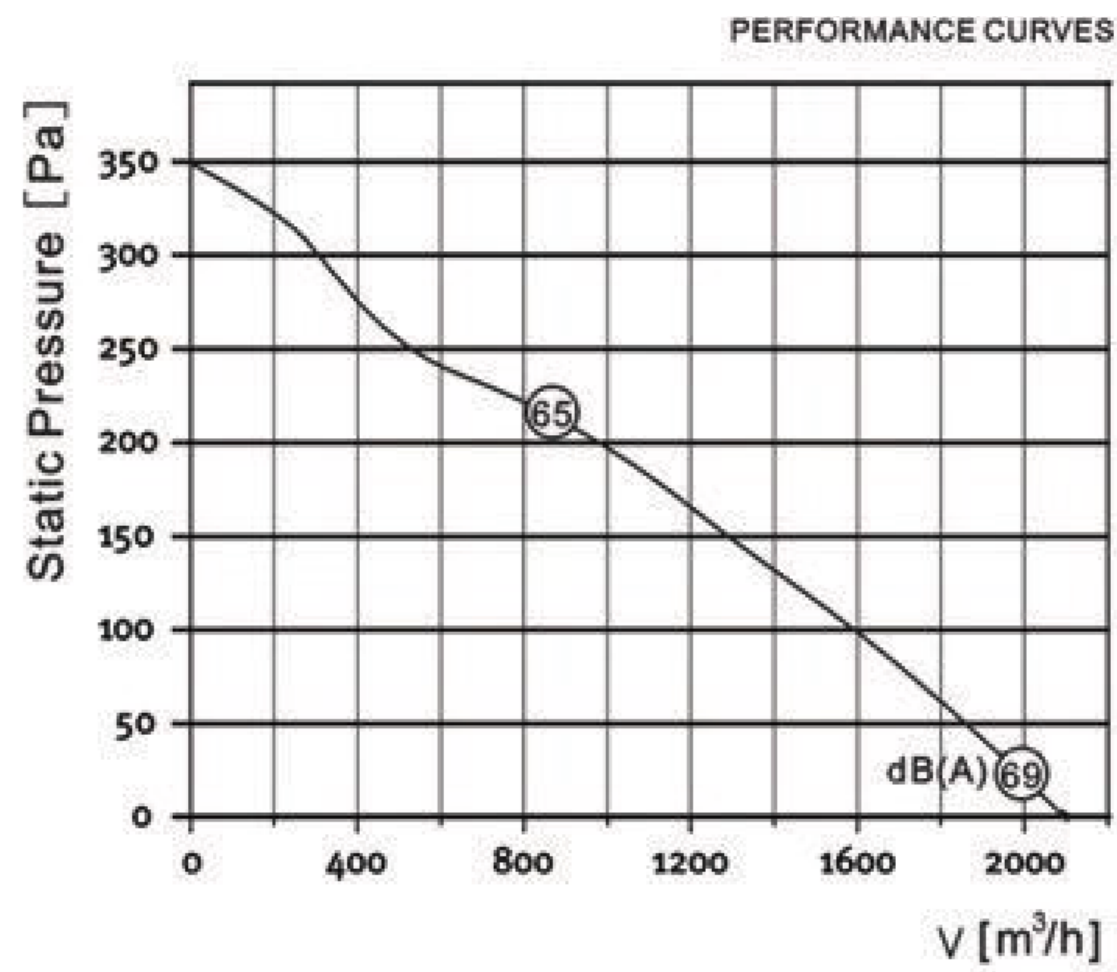

Product Drawing (mm)

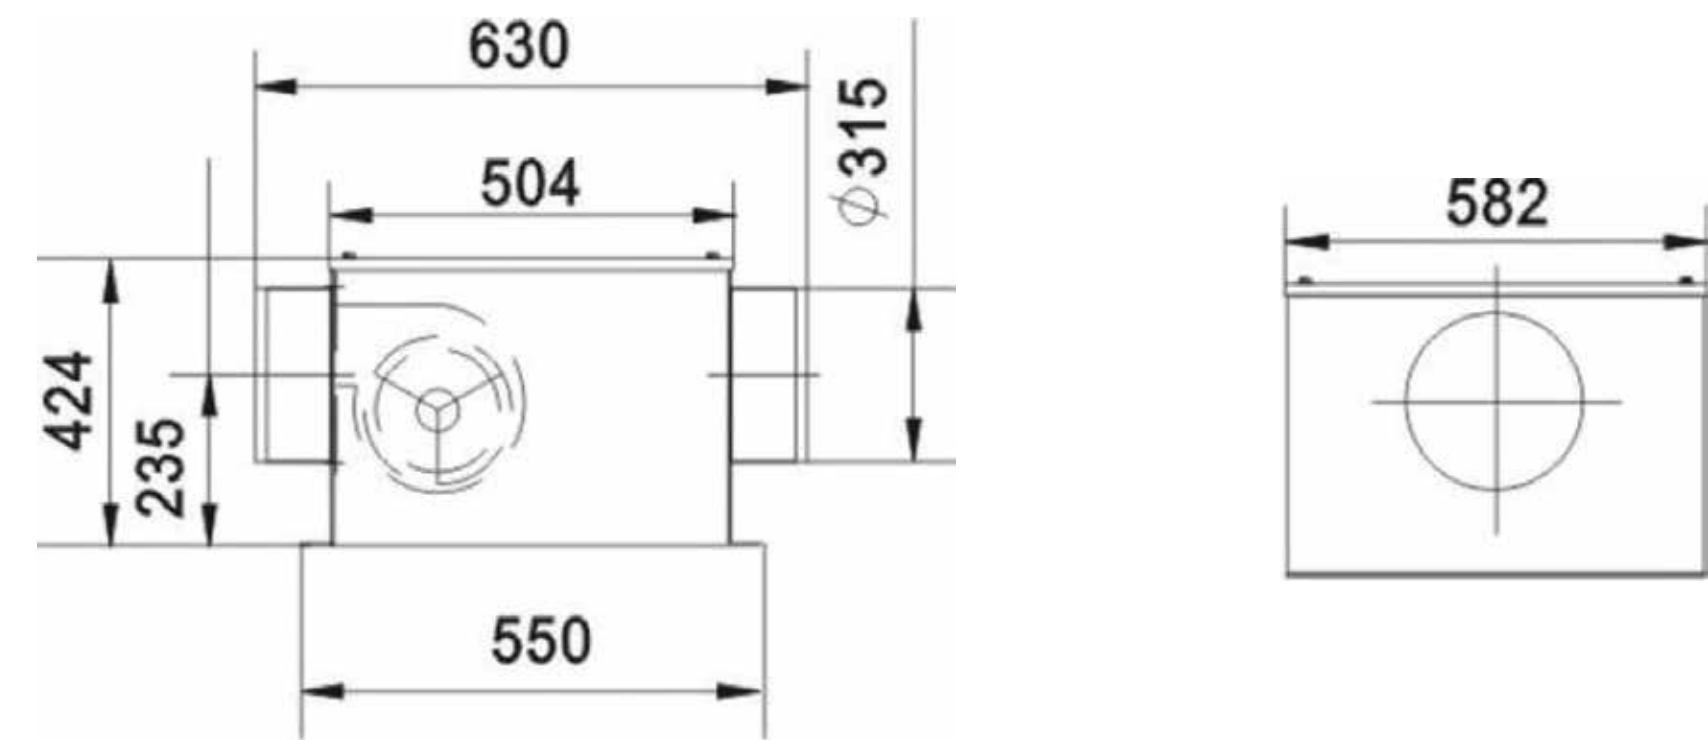

Sound Data

△dB(A)	LWA tot	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	8KHz
LWA2	-28	-36	-35	-31	-37	-41	-33	-35
LWA5	-9	-16	-17	-18	-18	-17	-20	-28
LWA6	0	-14	-13	-11	-7	-3	-8	-15