


LWDA400 Series

Product Characteristic

- Material: Galvanized Sheet Steel
- Supply Voltage: 230V,50Hz
- Direction of rotation: Clockwise,see on the lead
- Protection Class: IP54
- Insulation Class: F
- Operation Temperature: -10℃~+80℃
- Bearing: Ball Bearing
- Protection: Thermal Overload Protector(TOP)wired internally




Product Drawing (mm)

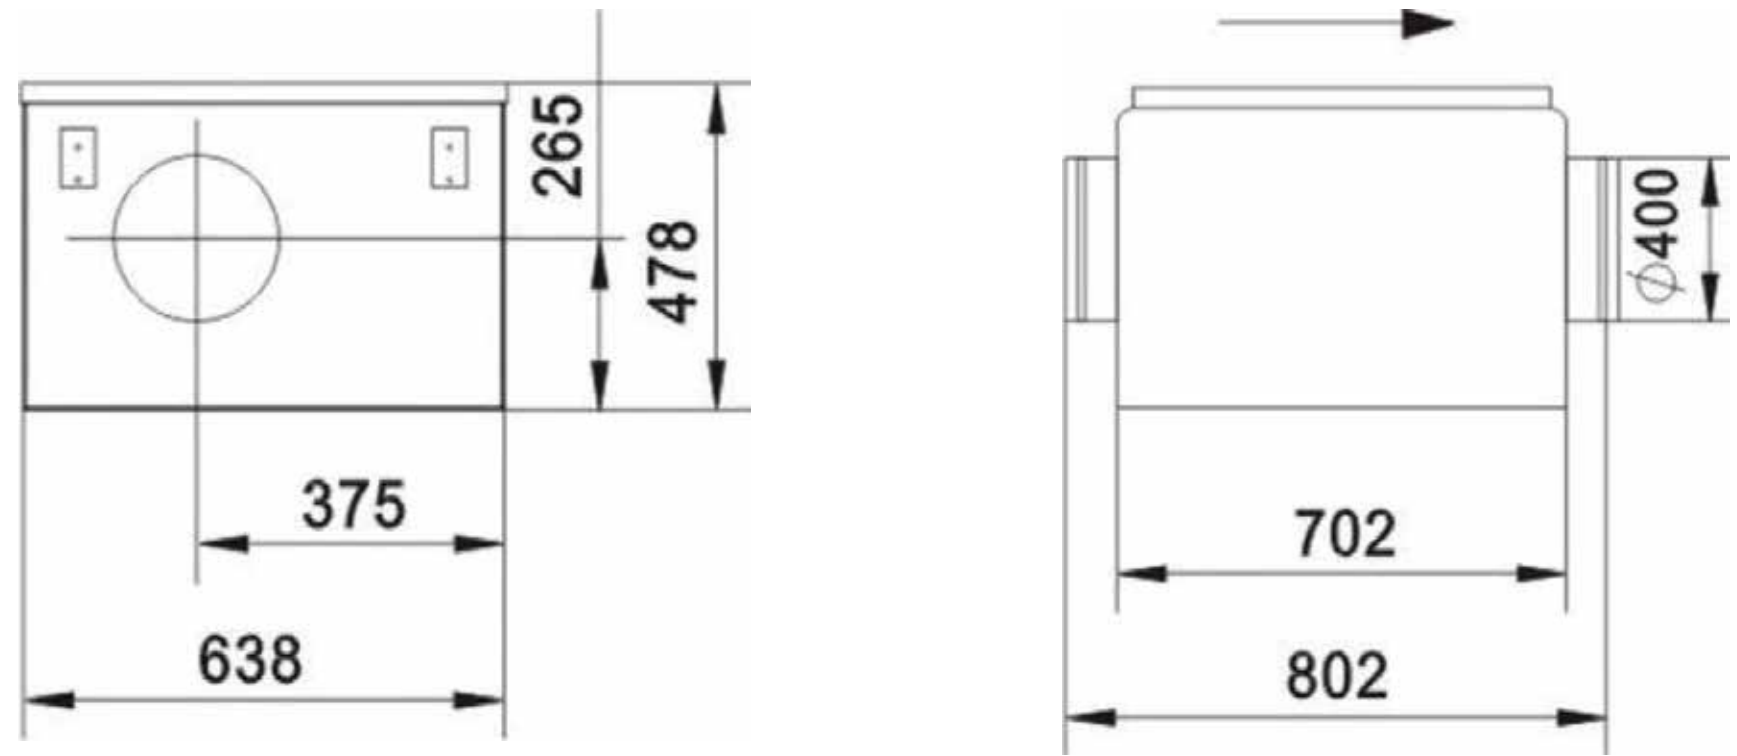

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Capacitor (μF)	Weight (Kg)	Wiring Diagram
LWDA400S-F01	230	50	470	2.1	810	8	50	002

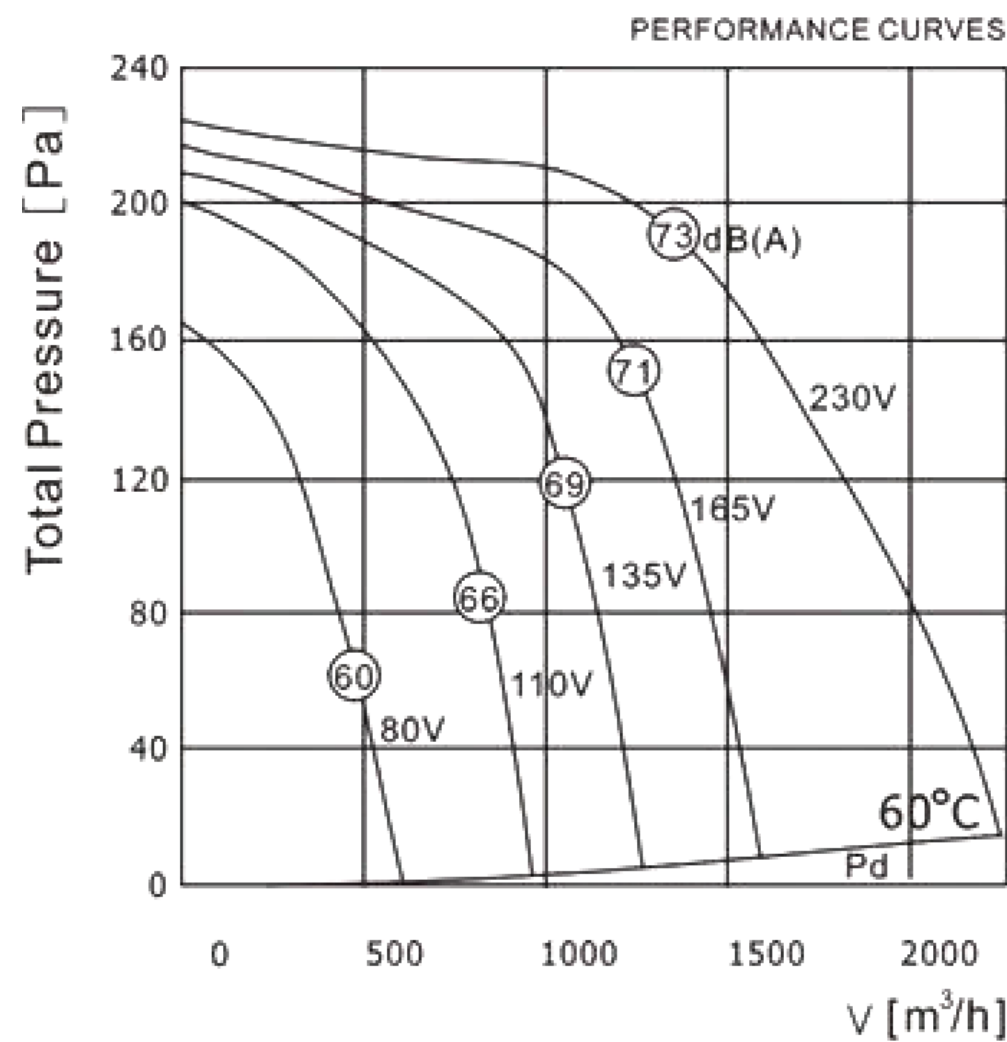

Sound Data

△dB(A)	LWA tot	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	8KHz
LWA2	-25	-35	-31	-31	-32	-36	-35	-34
LWA5	-9	-14	-15	-18	-19	-21	-24	-34
LWA6	0	-6	-8	-6	-6	-11	-11	-22