


LWDA400 Series

Product Characteristic

- Material: Galvanized Sheet Steel
- Supply Voltage: 230V,50Hz
- Direction of rotation: Clockwise,see on the lead
- Protection Class: IP44/IP20
- Insulation Class: B
- Operation Temperature: -10℃ ~ +80℃
- Bearing: Ball Bearing
- Protection: Thermal Overload Protector(TOP)wired internally




Product Drawing (mm)

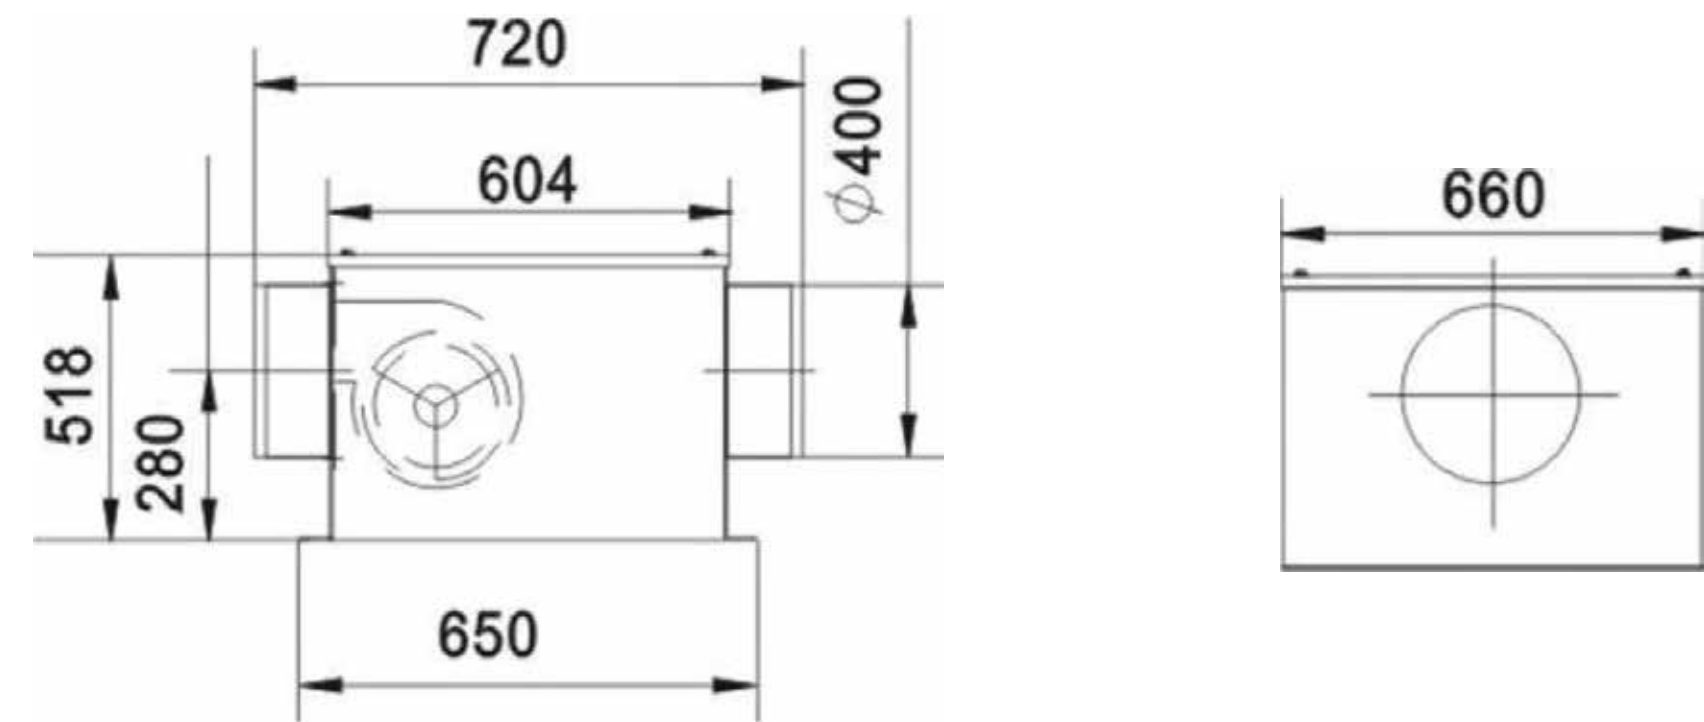

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Capacitor (μF)	Weight (Kg)	Wiring Diagram
LWDA400S-F03	230	50	1100	4.8	1300	20	38	004

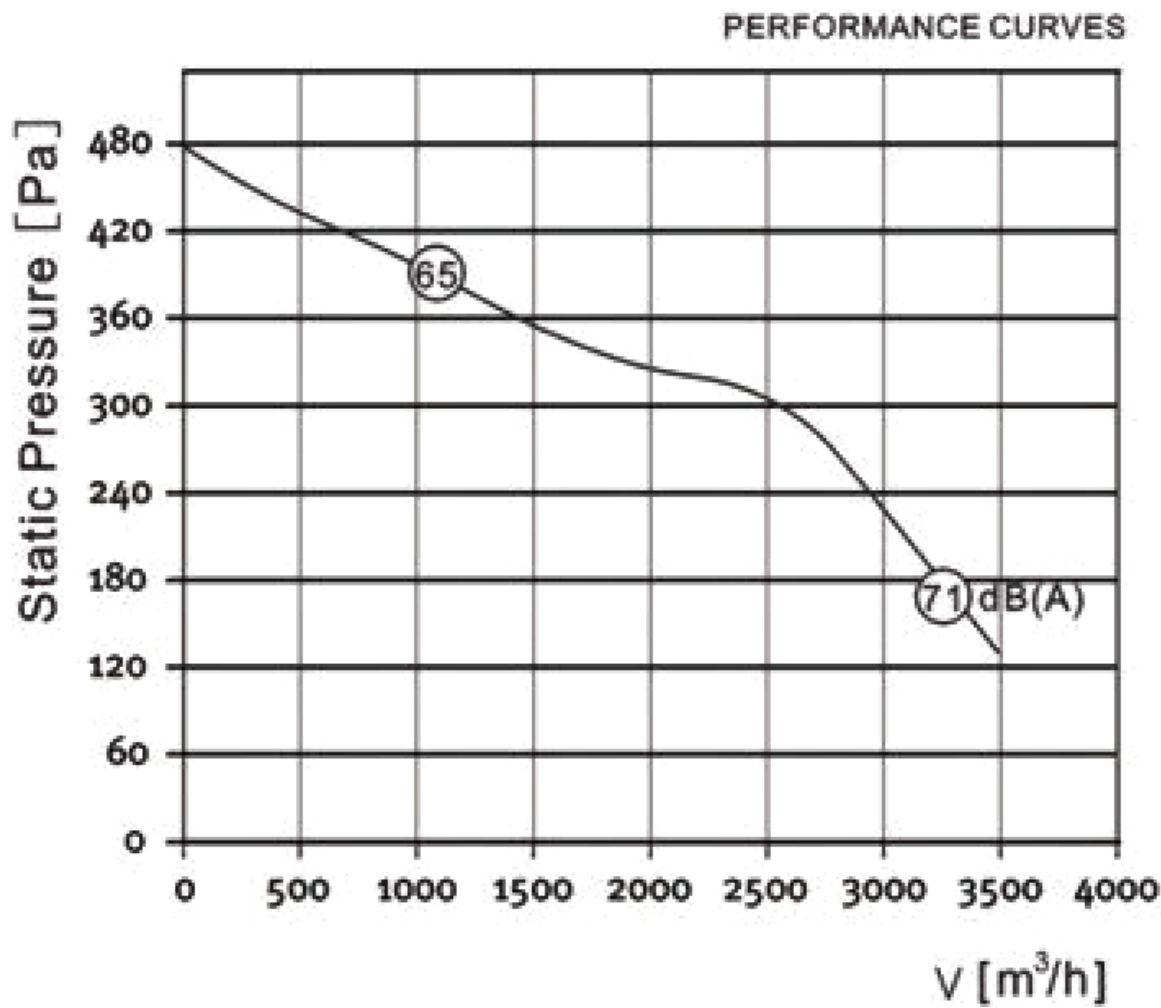

Sound Data

△dB(A)	LWA tot	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	8KHz
LWA2	-25	-32	-29	-33	-33	-35	-35	-37
LWA5	-10	-15	-13	-20	-21	-22	-25	-33
LWA6	0	-11	-9	-7	-4	-9	-10	-18