


LWDA500 Series

Product Characteristic

- Material:
- Galvanized Sheet Steel
- Supply Voltage:
- 230V,50Hz
- Direction of rotation:
- Clockwise,see on the lead
- Protection Class:
- IP54
- Insulation Class:
- F
- Operation Temperature:
- 10℃~+80℃
- Bearing:
- Ball Bearing
- Protection:
- Thermal Overload Protector(TOP)wired internally



Product Drawing (mm)

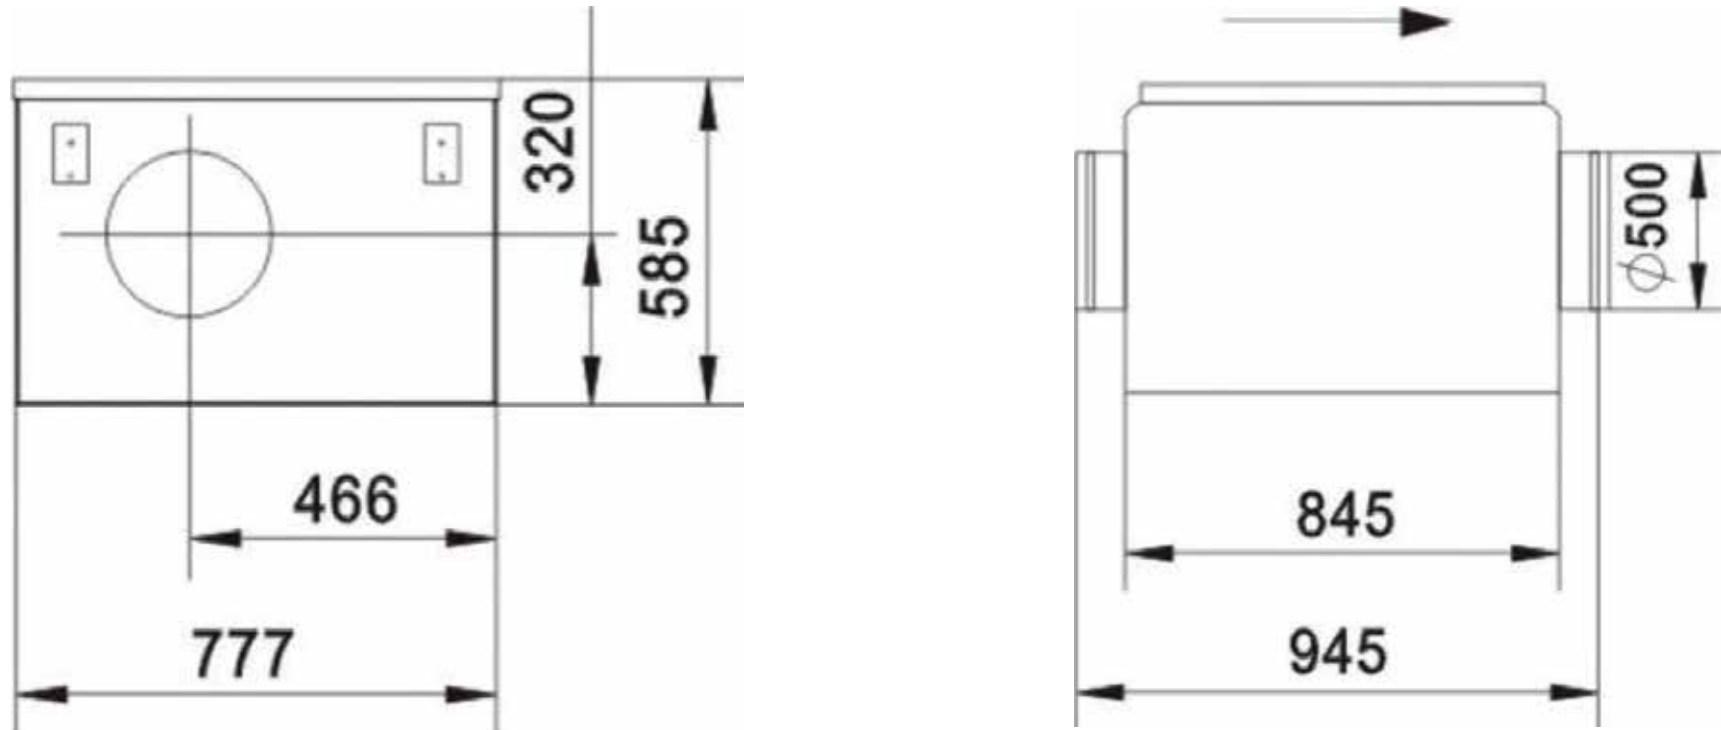

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Capacitor (μF)	Weight (Kg)	Wiring Diagram
LWDA500S-F04	230	50	1780	8	1280	30	71	002

Sound Data

△dB(A)	LWA tot	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	8KHz
LWA2	-27	-38	-32	-33	-34	-34	-36	-43
LWA5	-13	-19	-17	-24	-21	-21	-25	-33
LWA6	0	-14	-11	-9	-4	-5	-8	-18

