

LWDA500 Series


Product Characteristic

- Material: Galvanized Sheet Steel
- Supply Voltage: 230V,50Hz
- Direction of rotation: Clockwise,see on the lead
- Protection Class: IP54
- Insulation Class: F
- Operation Temperature: -10℃ ~+80℃
- Bearing: Ball Bearing
- Protection: Thermal Overload Protector(TOP)wired internally





Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Capacitor (μF)	Weight (Kg)	Wiring Diagram
LWDA500T-F03	400	50	1300	2.6	800	/	74	003

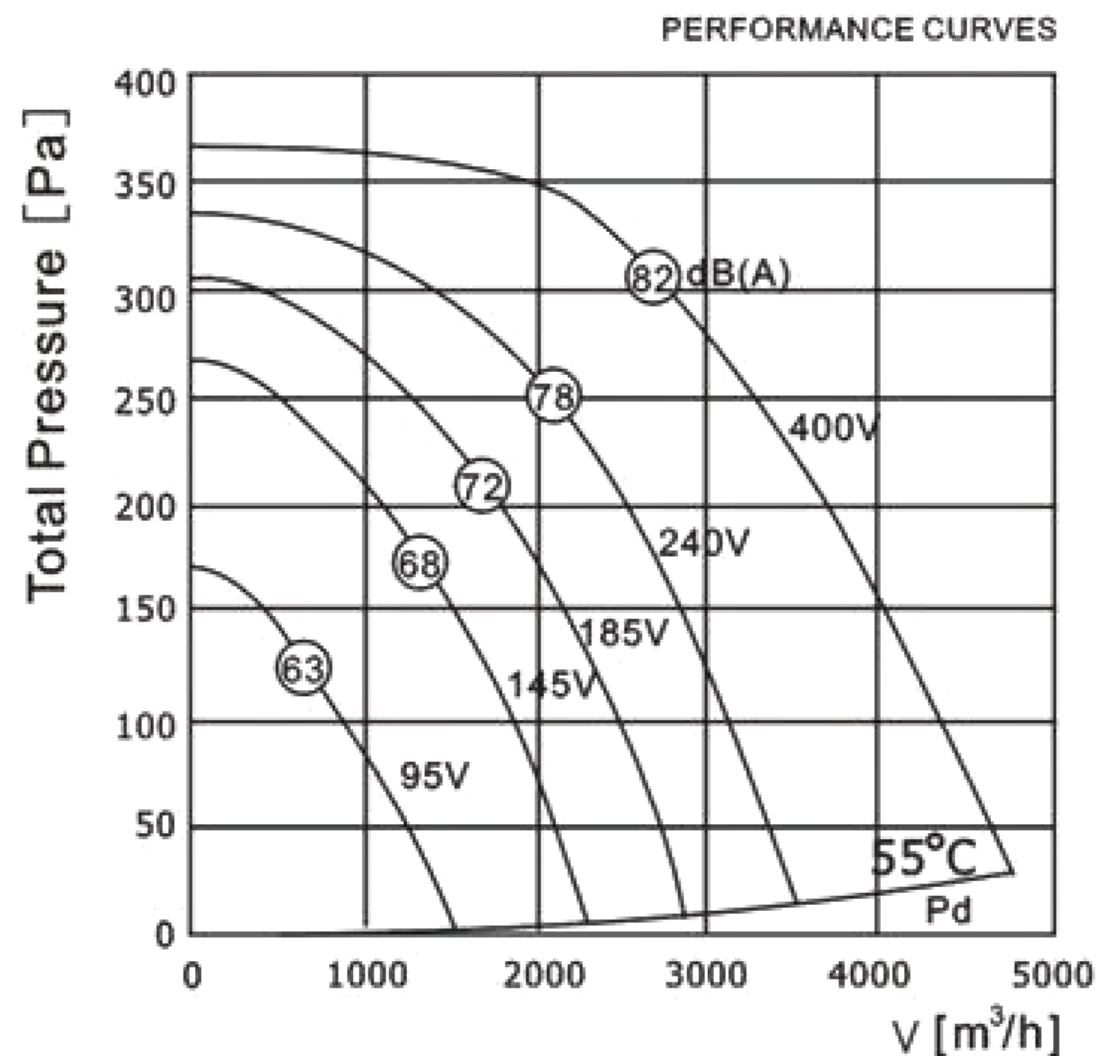

Product Drawing (mm)

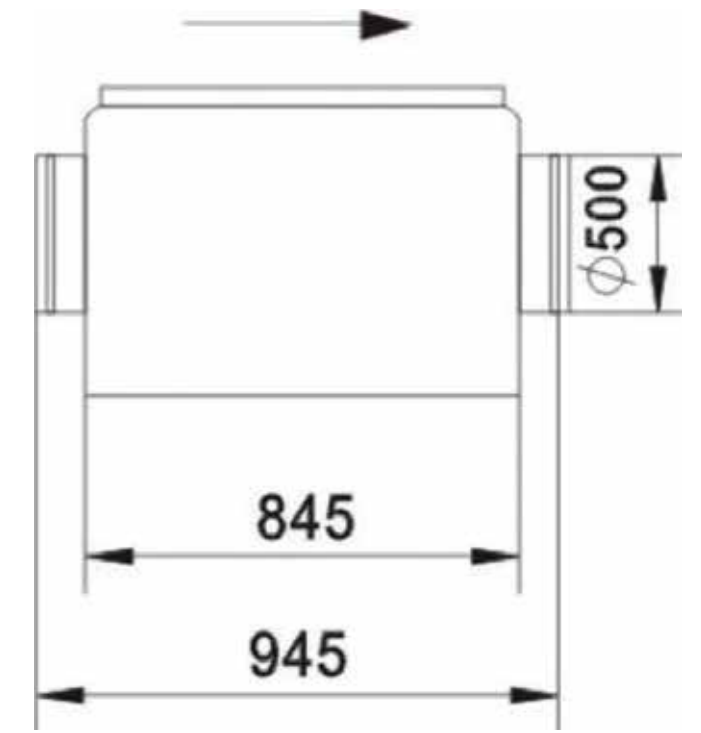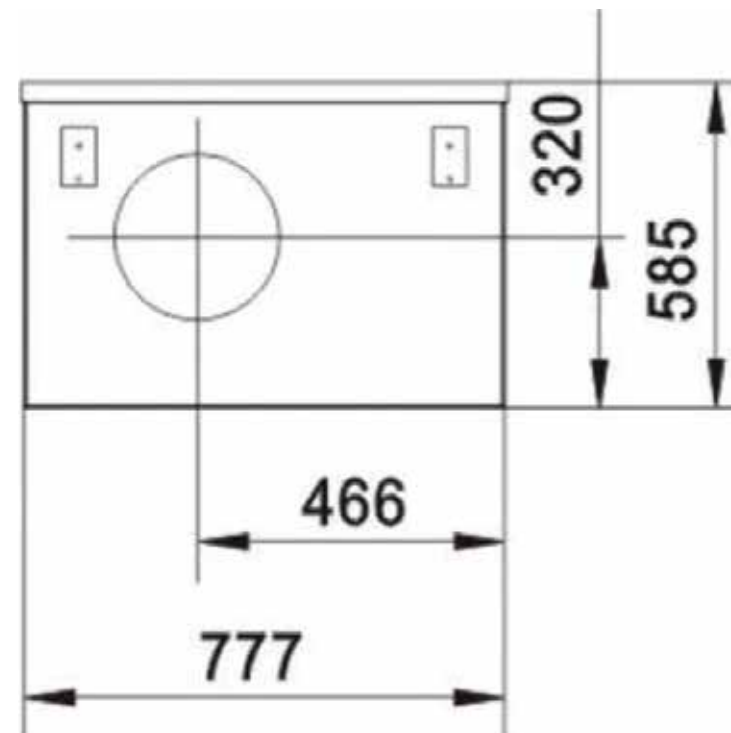

Sound Data

△dB(A)	LWA tot	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	8KHz
LWA2	-29	-39	-36	-35	-34	-41	-42	-42
LWA5	-11	-18	-21	-21	-18	-19	-18	-25
LWA6	0	-16	-14	-10	-5	-6	-6	-13