



LWDA630 Series

Product Characteristic

- Material: Galvanized Sheet Steel
- Supply Voltage: 230V,50Hz
- Direction of rotation: Clockwise,see on the lead
- Protection Class: IP54
- Insulation Class: F
- Operation Temperature: -10℃ ~+80℃
- Bearing: Ball Bearing
- Protection: Thermal Overload Protector(TOP)wired internally




Product Drawing (mm)

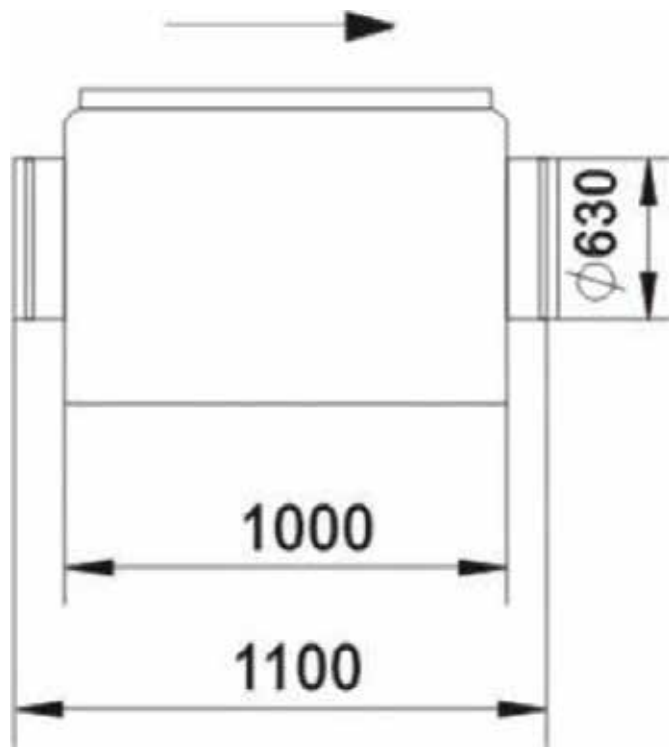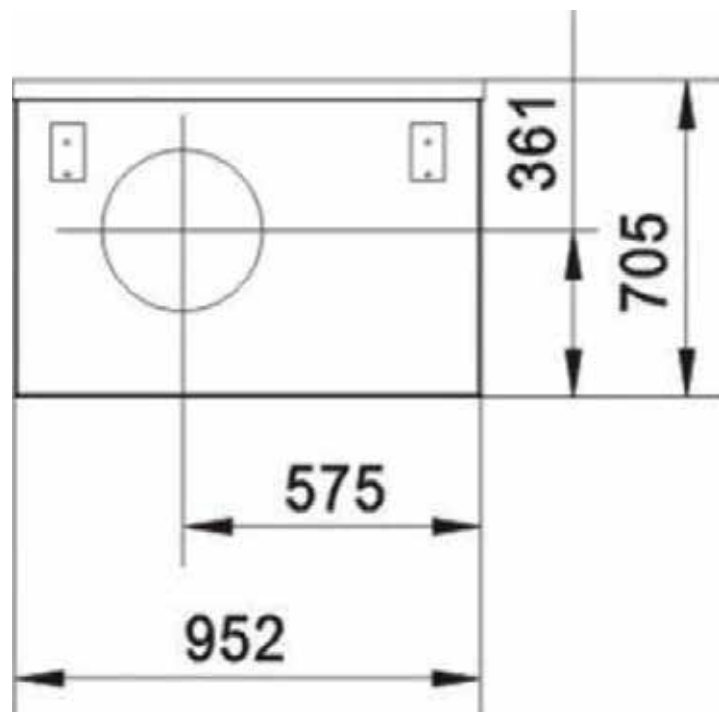

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Capacitor (μF)	Weight (Kg)	Wiring Diagram
LWDA630T-F02	400	50	1490	4.8	680	/	105	003

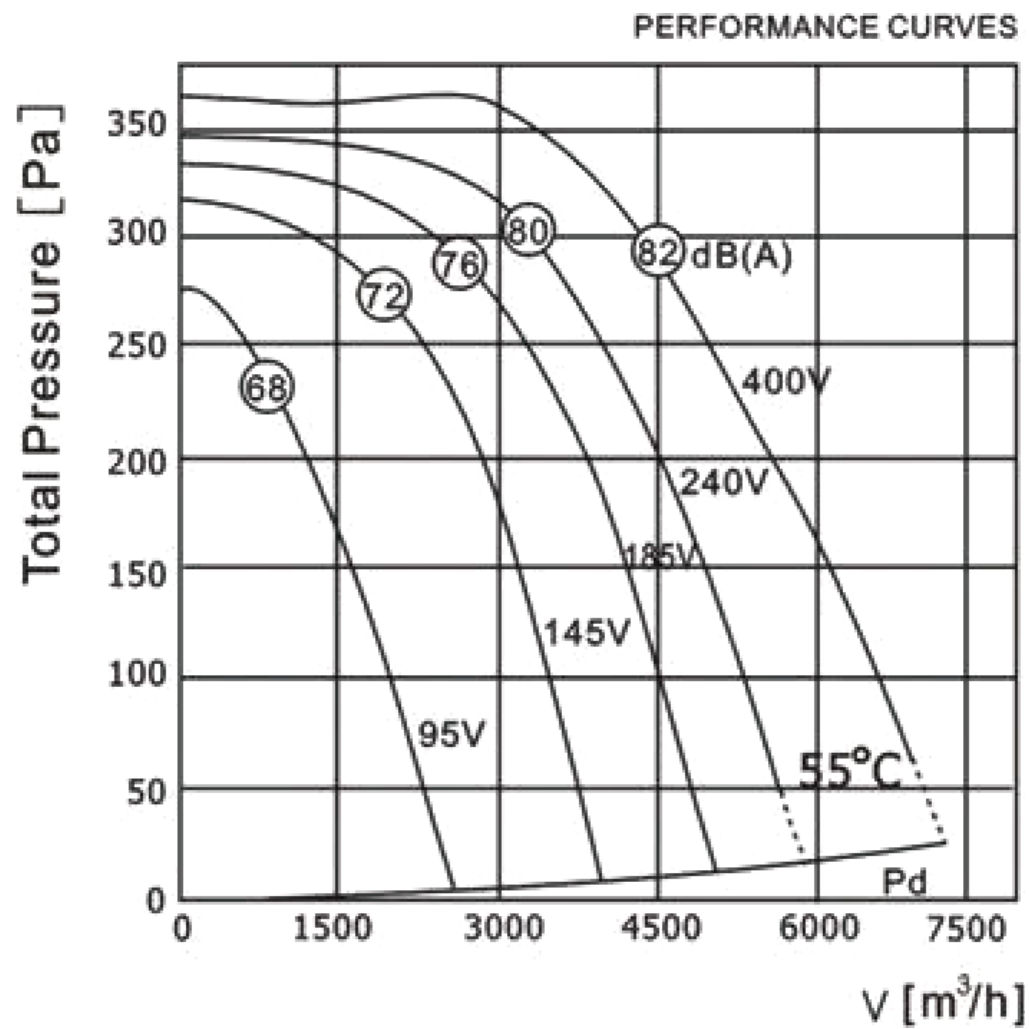

Sound Data

△dB(A)	LWA tot	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	8KHz
LWA2	-24	-35	-30	-27	-33	-31	-36	-41
LWA5	-12	-17	-21	-23	-18	-19	-22	-33
LWA6	0	-13	-11	-6	-5	-5	-10	-21