


LWDD-160 Series




Product Characteristic

- Impeller Material: Plastic
- Supply Voltage: 24V/48V
- Protection Class: IP44
- Technical Features: 0-10VDC/PWM Speed control, Tach output
- Motor Protection: Polarity Protection; Soft start; Over current protection; Overvoltage Protection
- Housing Material: Metal
- Mode of Operation: S1
- Insulation Class: B
- Operation Temperature: -25 °C ~ +60 °C

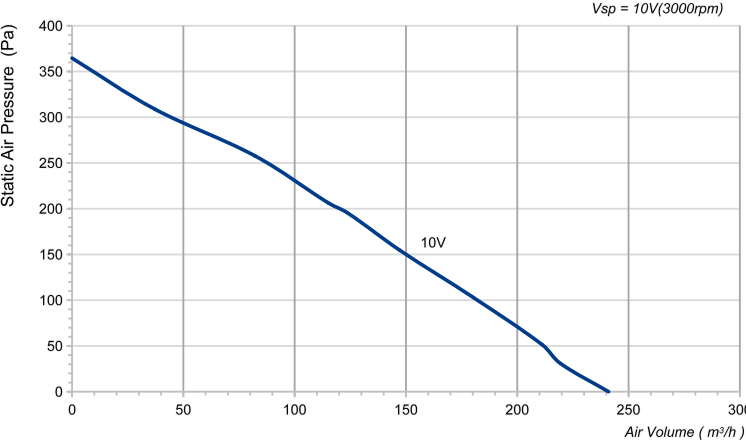


Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Air Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWDD-160M-MBN-02	24	100	4.2	662	505	3050	72
LWDD-160H-MBN-03	48	100	2.1	662	505	3050	72

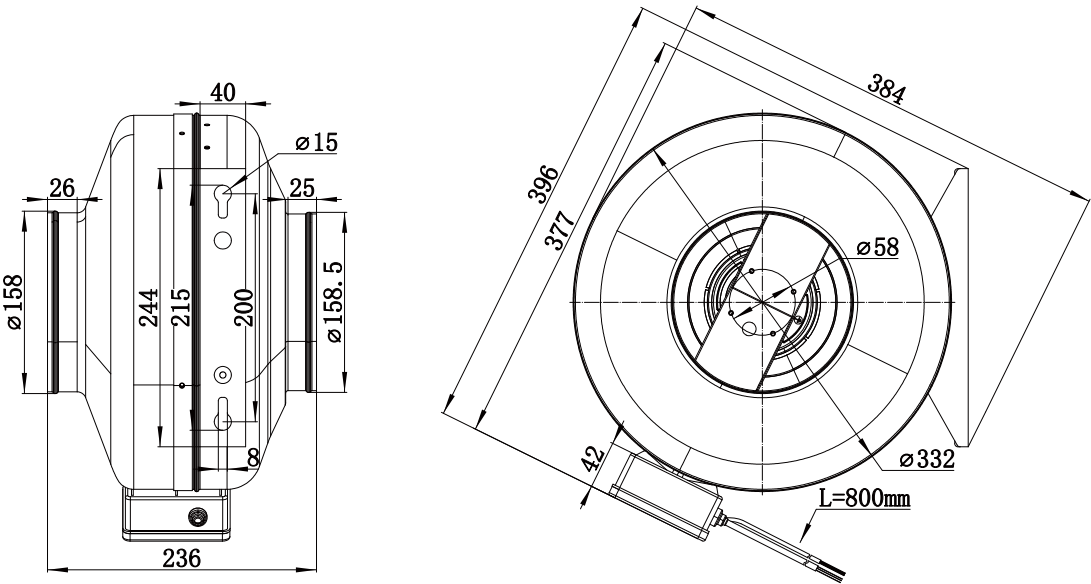

LWDD-200 Series

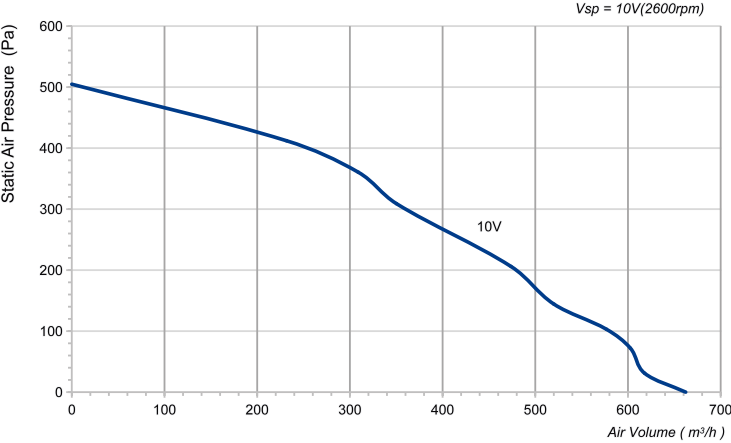

Product Characteristic

- Impeller Material: Plastic
- Supply Voltage: 12V/24V/48V
- Protection Class: IP44
- Technical Features: 0-10VDC/PWM Speed control, Tach output
- Motor Protection: Polarity Protection; Soft start; Over current protection; Overvoltage Protection
- Housing Material: Metal
- Mode of Operation: S1
- Insulation Class: B
- Operation Temperature: -25 °C ~ +60 °C



Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Air Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWDD-200L-MBN-10	12	60	5	662	505	2600	67
LWDD-200M-MBN-11	24	60	2.5	662	505	2600	67
LWDD-200H-MBN-12	48	60	1.2	662	505	2600	67

