


LWDE-100 Series




Product Characteristic

- Impeller Material: Plastic
- Mode Of Operation: S1
- Insulation Class: B
- Bearing: Maintenance-free ball bearings
- Protection: Blocked rotation, thermal protection, high and low pressure protection
- Supply Voltage: 230V,50/60Hz
- Protection Class: IP54
- Operation Temperature: -25 C ~ +60 C
- Direction of Rotation: Clockwise,seen on rotor

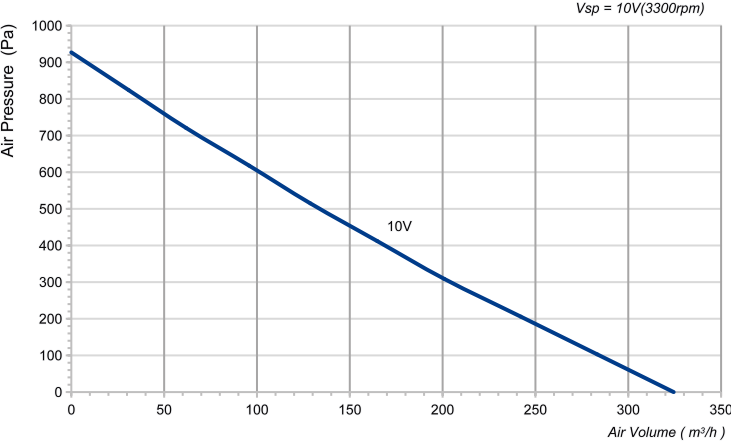


Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Air Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWDE-100S-MBN-10	230	85	0.65	324	927	3300	72

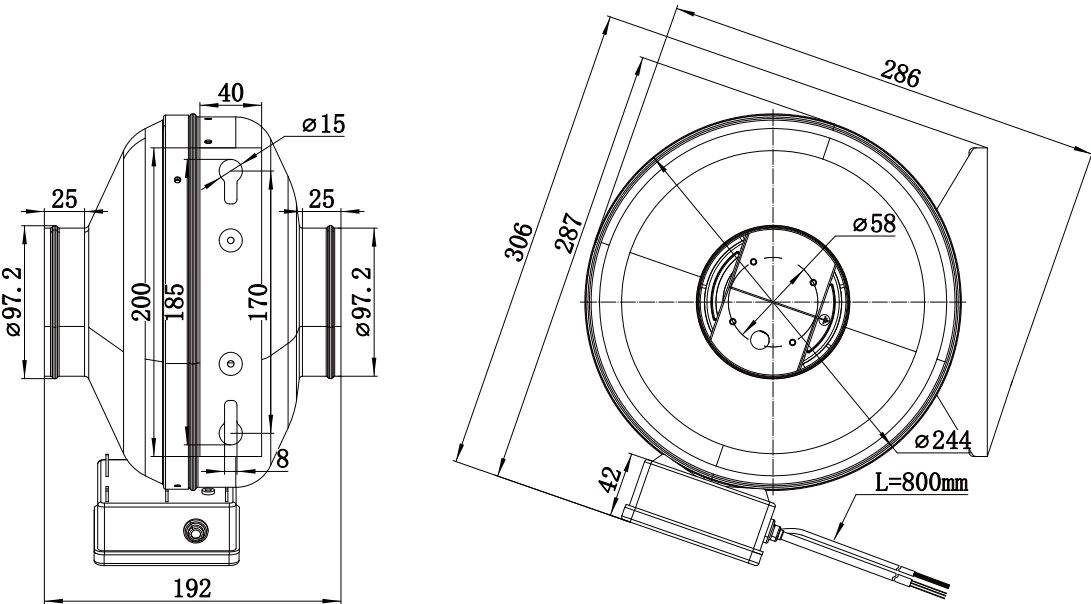

LWDE-125 Series

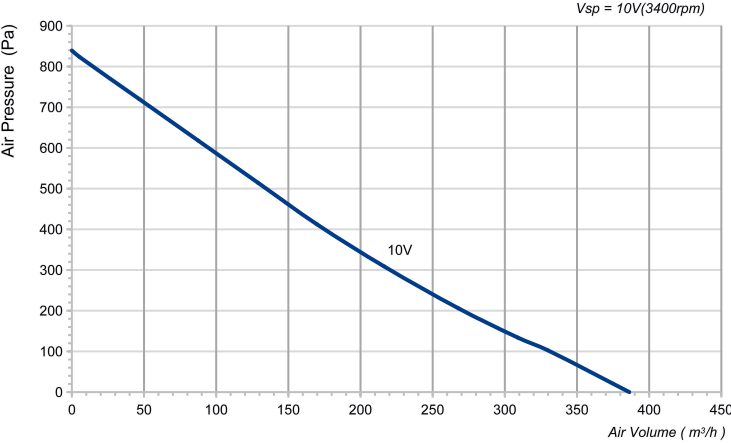

Product Characteristic

- Impeller Material: Plastic
- Mode Of Operation: S1
- Insulation Class: B
- Bearing: Maintenance-free ball bearings
- Protection: Blocked rotation, thermal protection, high and low pressure protection
- Supply Voltage: 230V,50/60Hz
- Protection Class: IP54
- Operation Temperature: -25 C ~ +60 C
- Direction of Rotation: Clockwise,seen on rotor



Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Air Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWDE-125S-MBN-06	230	85	0.65	386	839	3400	69

