


LWDE-150 Series




Product Characteristic

- | | | | |
|----------------------|--|--------------------------|-------------------------|
| • Impeller Material: | Plastic | • Supply Voltage: | 230V,50/60Hz |
| • Mode Of Operation: | S1 | • Protection Class: | IP54 |
| • Insulation Class: | B | • Operation Temperature: | -25 C ~ +60 C |
| • Bearing: | Maintenance-free ball bearings | • Direction of Rotation: | Clockwise,seen on rotor |
| • Protection: | Blocked rotation, thermal protection, high and low pressure protection | | |

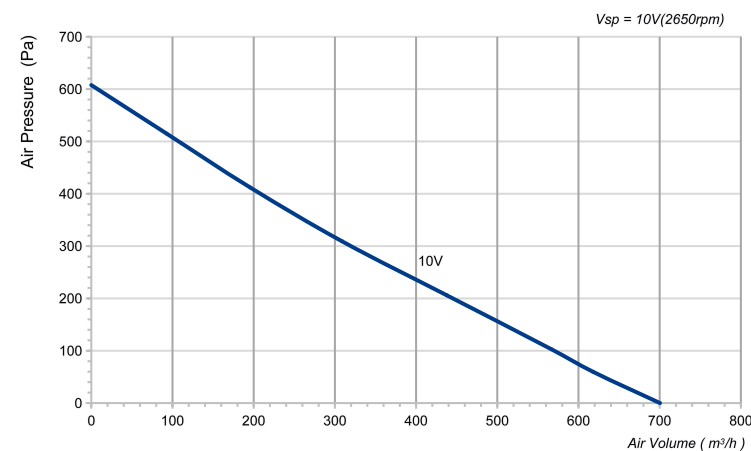


Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Air Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWDE-150S-MBN-11	230	85	0.65	700	608	2650	66

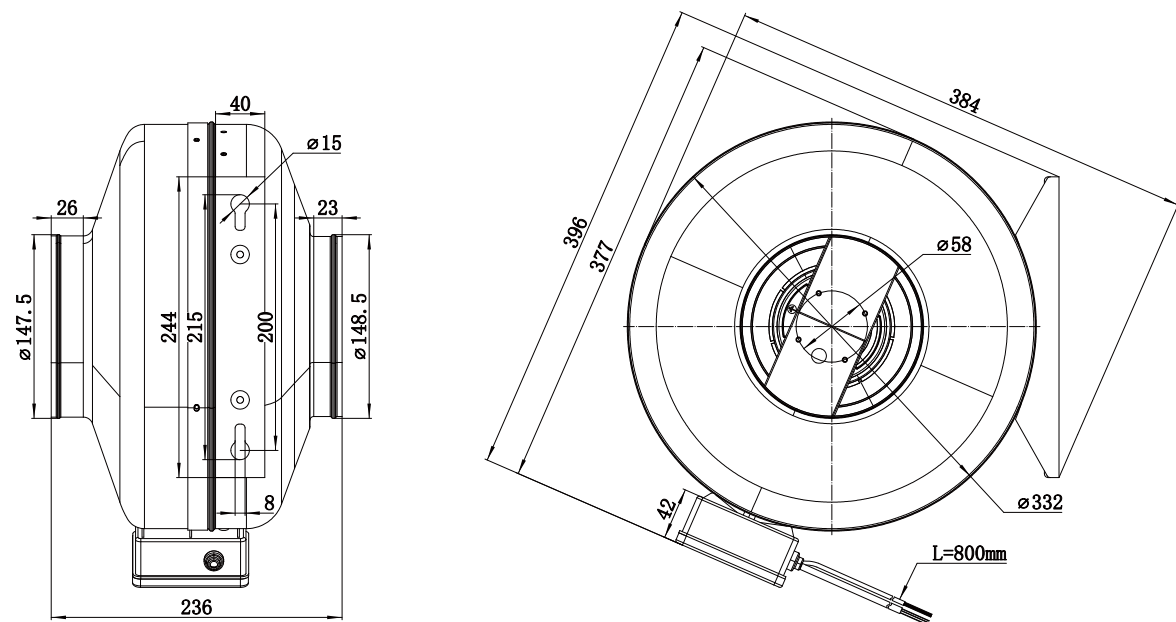

LWDE-160 Series

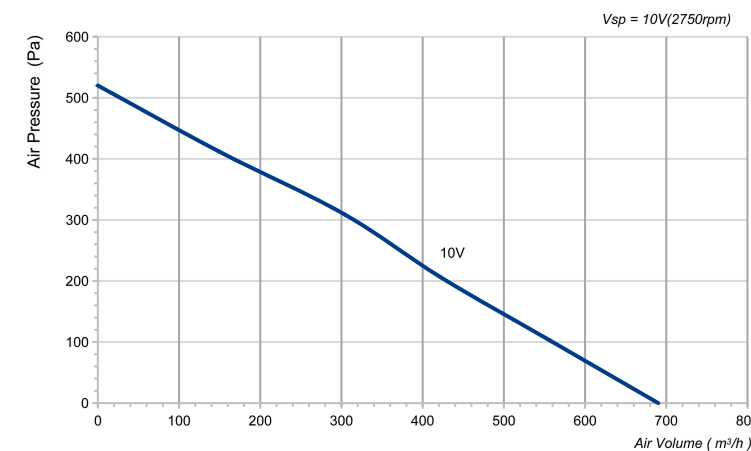

Product Characteristic

- | | | | |
|----------------------|--|--------------------------|-------------------------|
| • Impeller Material: | Plastic | • Supply Voltage: | 230V,50/60Hz |
| • Mode Of Operation: | S1 | • Protection Class: | IP54 |
| • Insulation Class: | B | • Operation Temperature: | -25 C ~ +60 C |
| • Bearing: | Maintenance-free ball bearings | • Direction of Rotation: | Clockwise,seen on rotor |
| • Protection: | Blocked rotation, thermal protection, high and low pressure protection | | |



Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Air Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWDE-160S-MBN-01	230	85	0.65	690	520	2750	68

