


LWDE-200 Series




Product Characteristic

• Impeller Material:	Plastic	• Supply Voltage:	230V,50/60Hz
• Mode Of Operation:	S1	• Protection Class:	IP54
• Insulation Class:	B	• Operation Temperature:	-25 C ~ +60 C
• Bearing:	Maintenance-free ball bearings	• Direction of Rotation:	Clockwise,seen on rotor
• Protection:	Blocked rotation, thermal protection, high and low pressure protection		

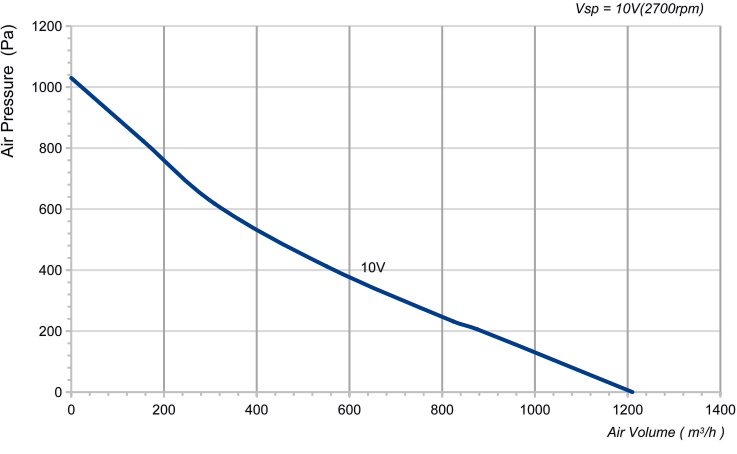


Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Air Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWDE-200S-MBN-09	230	170	1.1	1210	1030	2700	71

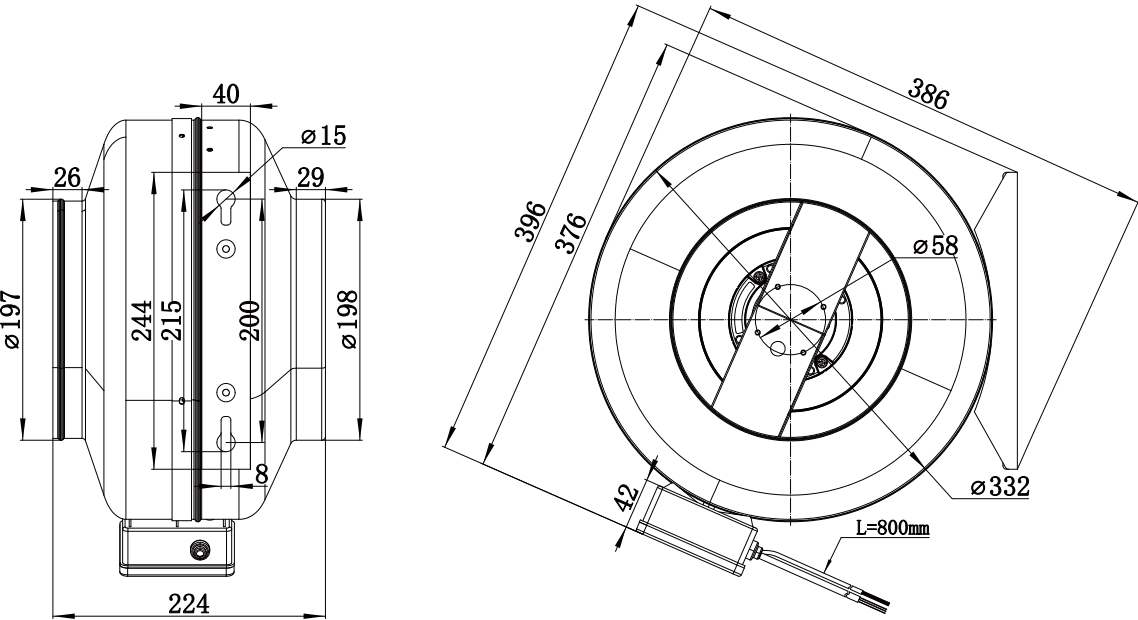

LWDE-250 Series

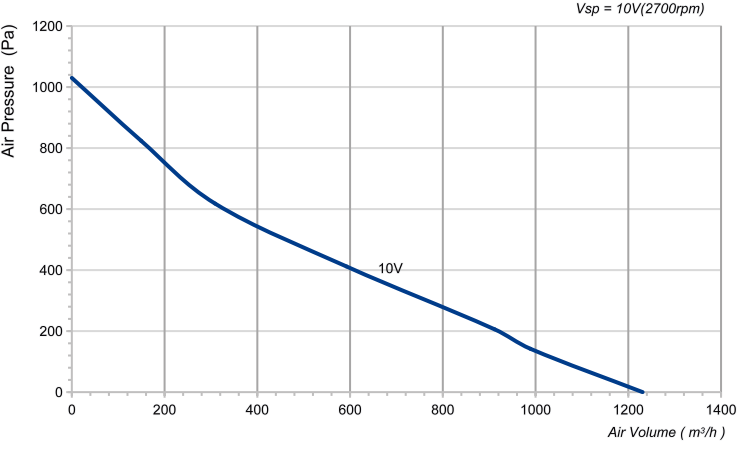

Product Characteristic

• Impeller Material:	Plastic	• Supply Voltage:	230V,50/60Hz
• Mode Of Operation:	S1	• Protection Class:	IP54
• Insulation Class:	B	• Operation Temperature:	-25 C ~ +60 C
• Bearing:	Maintenance-free ball bearings	• Direction of Rotation:	Clockwise,seen on rotor
• Protection:	Blocked rotation, thermal protection, high and low pressure protection		



Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Air Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWDE-250S-MBN-07	230	170	1.1	1231	1030	2700	71

