


Industrial Exhaust Fan

- 100% pure copper wire motor
- Full metal body
- Powerful airflow, various sizes for choose
- Optional for front grill, optional metal shutters

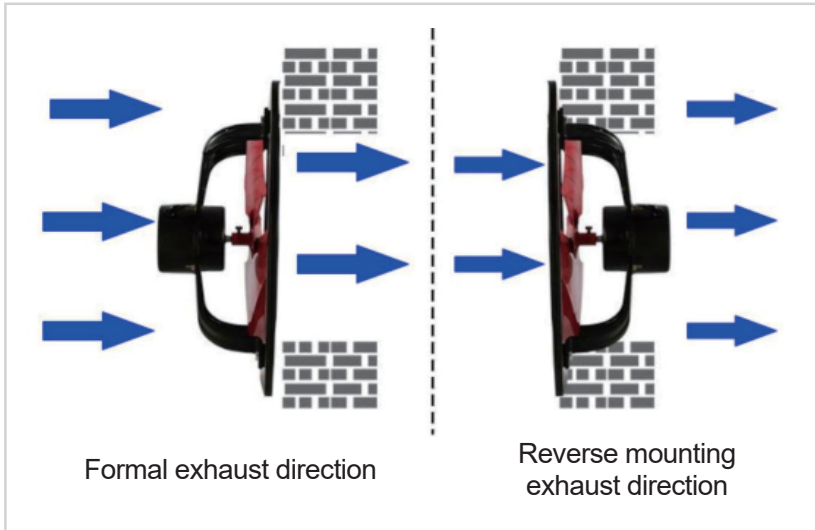

Technical Parameters

Model	Voltage (V)	Frequency (Hz)	Power (W)	Volume (m³/min)	Speed (RPM)	Package size (cm)
LWEA200(8")S(U)M-112	110 ~ 120 220 ~ 240	50/60	32	9	1350	80x28x27(6pcs)
LWEA250(10")S(U)M-113		50/60	36	12	1350	73×31×32(5pcs)
LWEA300(12")S(U)M-114		50/60	42	17	1350	79×37×38(5pcs)
LWEA355(14")S(U)M-115		50/60	55	22.5	1350	42×18×42
LWEA400(16")S(U)M-116		50/60	110	48	1350	49×25×49
LWEA450(18")S(U)M-117		50/60	160	80	1350	58×26×58
LWEA500(20")S(U)M-118		50/60	180	95	1350	62×28×62
LWEA600(24")S(U)M-119		50/60	280	145	1350	72×28×72

Model	Voltage/Frequency (V/Hz)	Power (W)	Air flow (m³/h)	Speed (RPM)	Noise (dBA)	Hole pitch (mm)	Product size (LXW mm)
LWEA200(8")SM-001	220/50	50	750	1400	>40	190×190	250×250×140
LWEA250(10")SM-002	220/50	60	850	1400	>46	240×240	290×290×140
LWEA300(12")SM-003	220/50	80	1080	1400	>51	290×290	350×350×150
LWEA355(14")SM-004	220/50	100	2280	1400	>55	340×340	400×400×180
LWEA400(16")SM-005	220/50	140	2880	1400	>58	390×390	480×480×230

Industrial Exhaust Fan

- 100% pure copper wire motor
- Full metal body,black color
- Powerful airflow, various sizes for choose
- Optional for front grill, optional metal shutters

Technical Parameters

Model	Voltage (V)	Frequency (Hz)	Power (W)	Volume (m³/min)	Speed (RPM)	Package size (cm)
LWEA200(8")S(U)M-120	110 ~ 120 220 ~ 240	50/60	32	9	1350	80x28x27(6pcs)
LWEA250(10")S(U)M-121		50/60	36	12	1350	73×31×32(5pcs)
LWEA300(12")S(U)M-122		50/60	42	17	1350	79×37×38(5pcs)
LWEA355(14")S(U)M-123		50/60	55	22.5	1350	42×18×42
LWEA400(16")S(U)M-124		50/60	110	48	1350	49×25×49
LWEA450(18")S(U)M-125		50/60	160	80	1350	58×26×58
LWEA500(20")S(U)M-126		50/60	180	95	1350	62×28×62
LWEA600(24")S(U)M-127		50/60	280	145	1350	72×28×72