


LWFA-133 Serise





Product Characteristic

- Material : Metal
- Insulation Class: F
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Operation Temperature: -30 C ~ +60 C

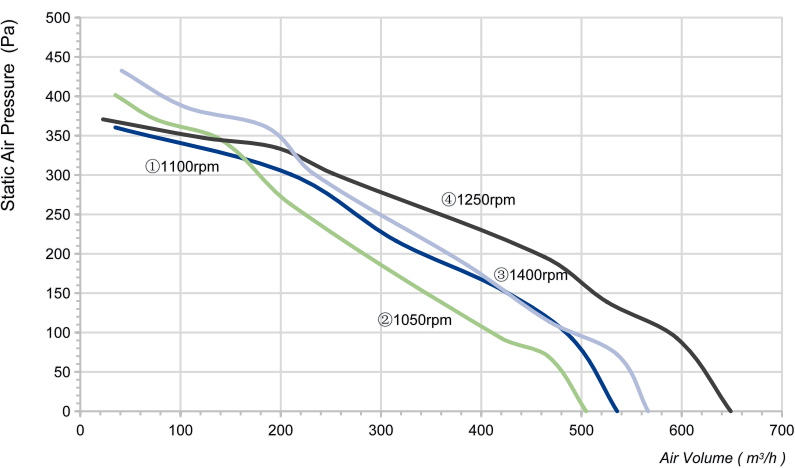


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWFA2E133-092DS-01	230	50	130	0.6	1100	536	361	60	3uF	①
LWFA2E133-092DS-02	230	60	135	0.62	1050	505	402	60	3uF	②
LWFA4E133-092DS-03	230	50	180	0.8	1400	649	371	69	4uF	③
LWFA4E133-092DS-04	230	60	190	0.86	1250	567	433	69	4uF	④

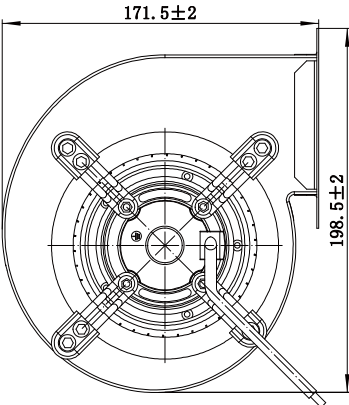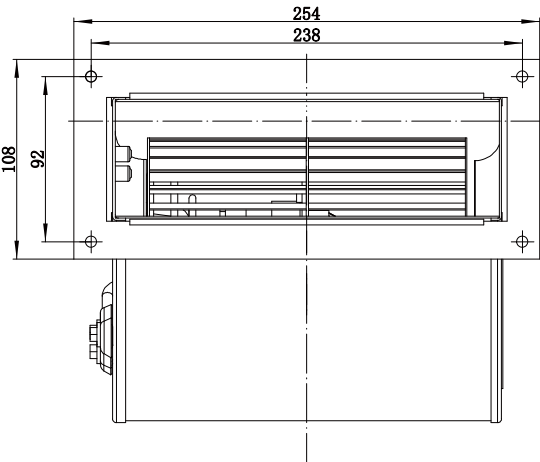

LWFA-133 Serise

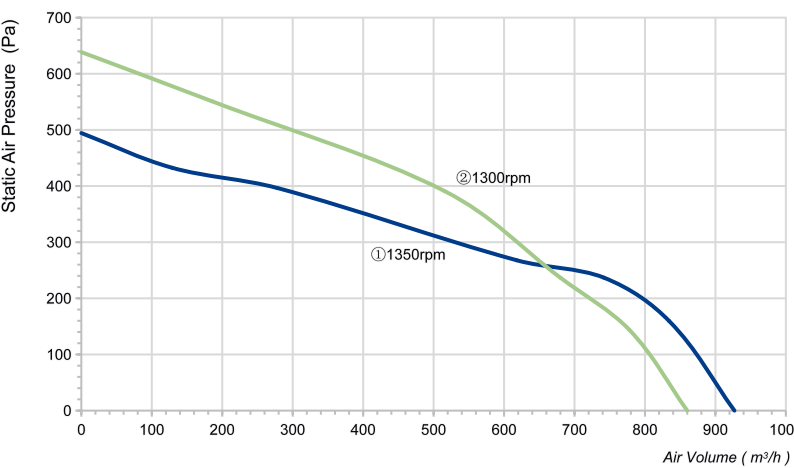

Product Characteristic

- Material : Metal
- Insulation Class: F
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Operation Temperature: -30 C ~ +60 C



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWFA2E133-092DS-05	230	50	250	1.15	1350	927	494	69	6uF	①
LWFA2E133-092DS-06	230	60	265	1.22	1300	886	639	69	6uF	②

