


LWFA-160 Serise




Product Characteristic

- Material: Plastic PA66
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: F
- Operation Temperature: -30 C ~ +60 C

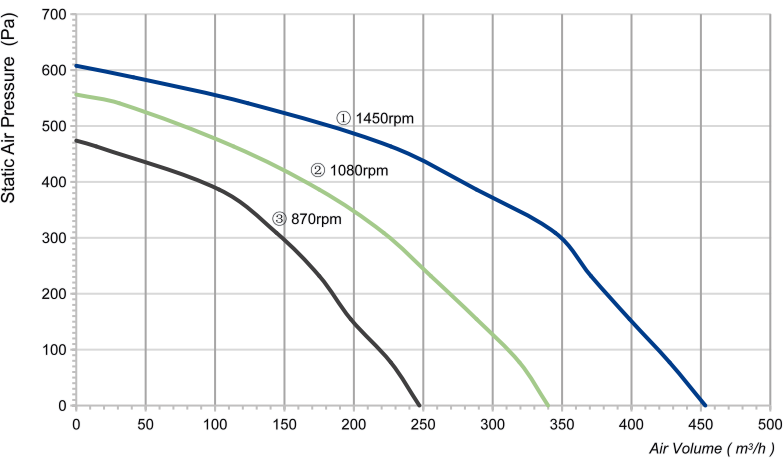


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWFA2E160-092SS-03	230	50	150	0.67	1450	453	608	57	3.5uF	①
			120	0.55	1080	340	556	49	3.5uF	②
			100	0.47	870	247	474	43	3.5uF	③

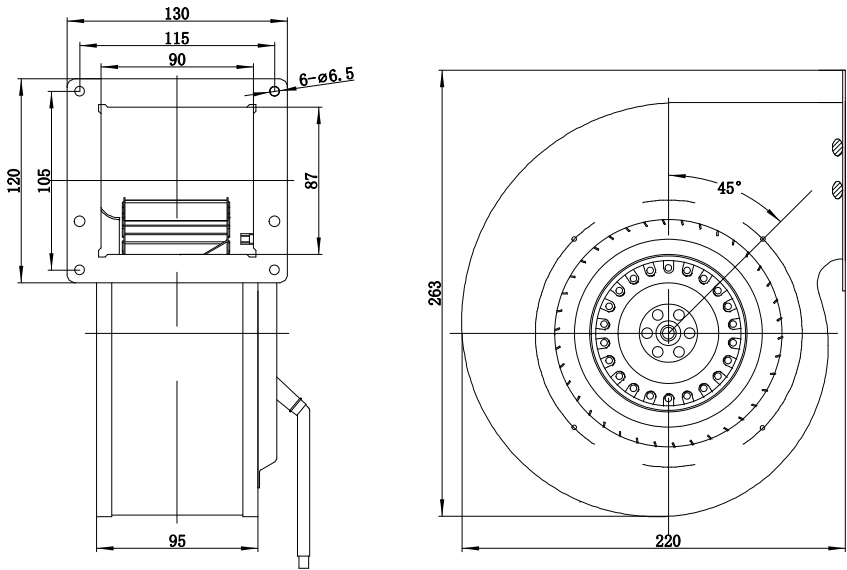

LWFA-160 Serise

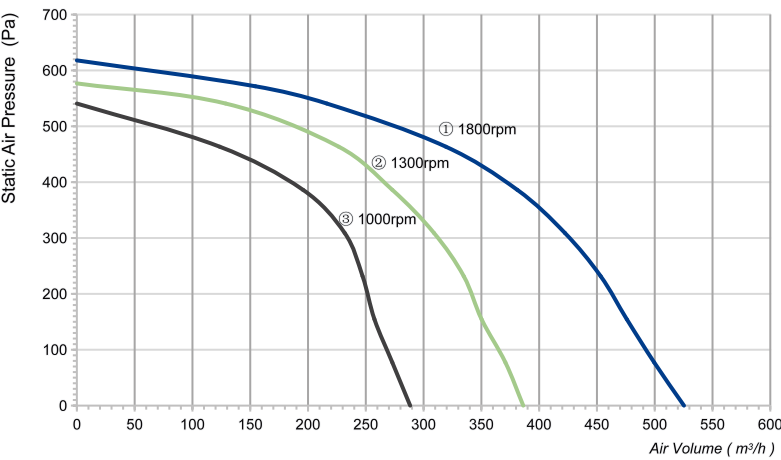

Product Characteristic

- Material: Plastic PA66
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: F
- Operation Temperature: -30 C ~ +60 C



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWFA2E160-092SS-04	230	50	220	1	1800	525	618	61	4uF	①
			190	0.9	1300	386	577	54	4uF	②
			160	0.75	1000	288	541	47	4uF	③

