
ВЕНТИЛЯТОРЫ.RU
МАГАЗИН ПРОМЫШЛЕННЫХ ВЕНТИЛЯТОРОВ
ventilatorry.ru

LWFA-315 Serise



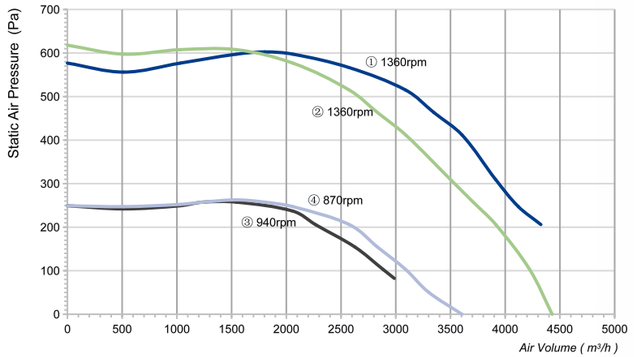


Product Characteristic

- Material: Galvanised sheet steel
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: F
- Operation Temperature: -30℃～+60℃

CE RoHS ETL BSCI ISO EAC UL LVD

Technical Specifications


Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWFA4D315-188NT-01	380	50	2200	4	1360	4326	577	80	/	①
LWFA4E315-188NS-02	220	50	2300	7.3	1360	4429	618	80	30	②
LWFA6D315-138NT-03	380	50	780	1.5	940	2987	249	68	/	③
LWFA6E315-138NS-04	220	50	720	3.6	870	3605	249	68	20	④

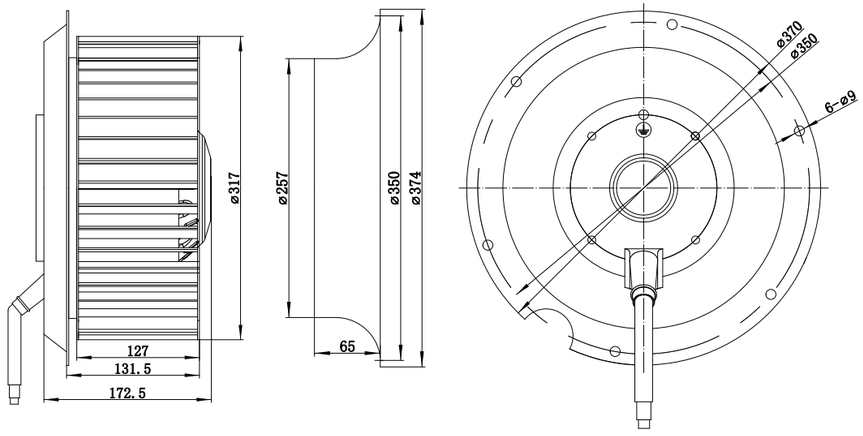

zakaz@ventilatorry.ru +7 (495) 133-95-09

ВЕНТИЛЯТОРЫ.RU
МАГАЗИН ПРОМЫШЛЕННЫХ ВЕНТИЛЯТОРОВ
ventilatorry.ru

LWFA-355 Serise

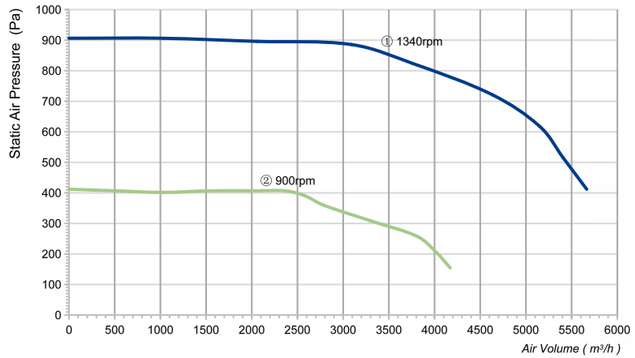




Product Characteristic

- Material: Galvanised sheet steel
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: F
- Operation Temperature: -30℃～+60℃

CE RoHS ETL BSCI ISO EAC UL LVD

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWFA4D355-188NT-01	380	50	3500	5.9	1340	5665	906	80	/	①
LWFA6D355-188NT-02	380	50	1150	2.3	900	4172	412	70	/	②

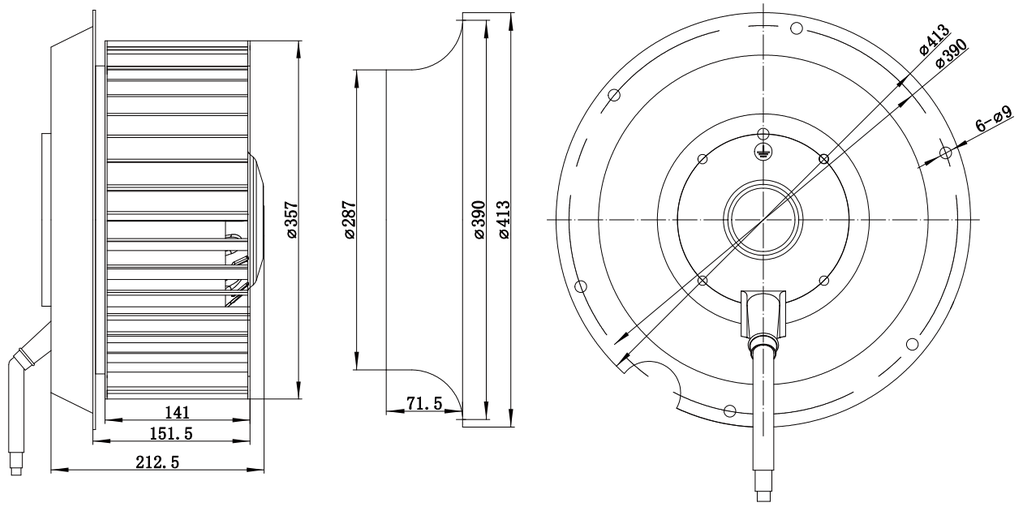

zakaz@ventilatorry.ru +7 (495) 133-95-09