


LWFD-160 Serise




Product Characteristic

- | | | | |
|----------------------|--------------------------------|--------------------------|--------------|
| • Material: | Galvanised sheet steel | • Type of Protection: | IP54 |
| • Bearing: | Maintenance-free ball bearings | • Insulation Class: | F |
| • Mode of Operation: | S1 | • Operation Temperature: | -30 C ~+60 C |

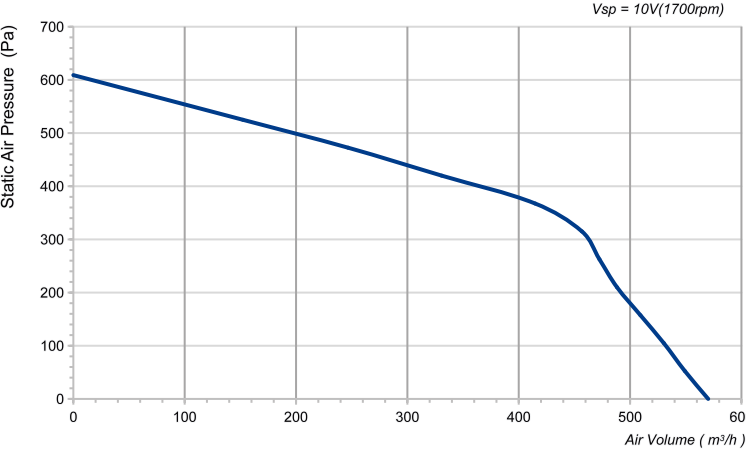


Technical Specifications

Model	Voltage (V)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Curve
LWFD3G160-092SH-01	48	92	1.92	1700	570	609	/	/

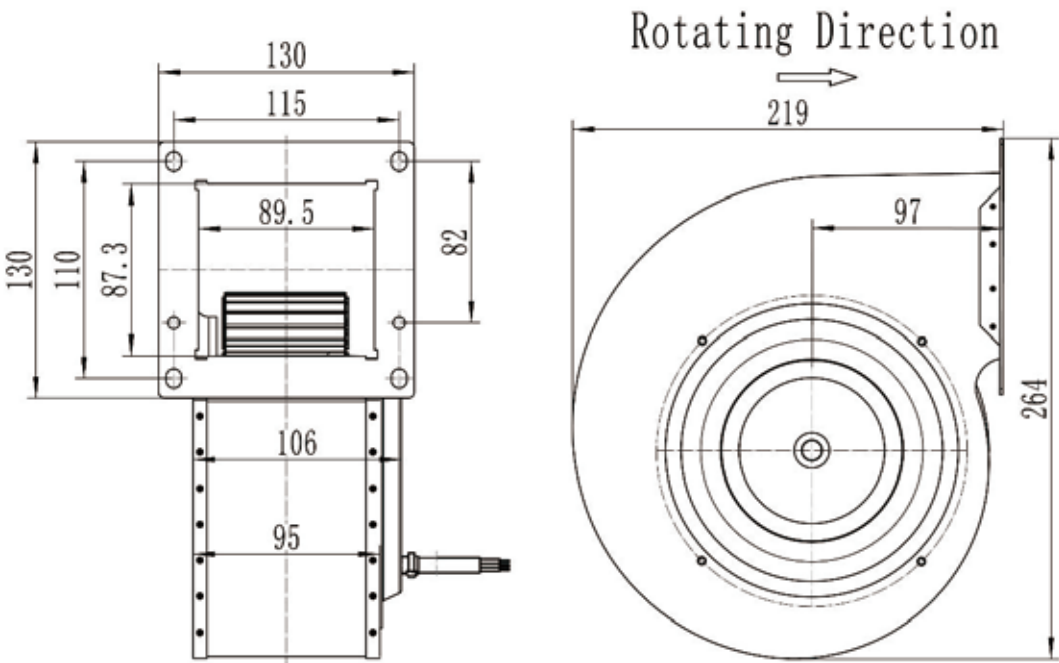

LWFD-160 Serise

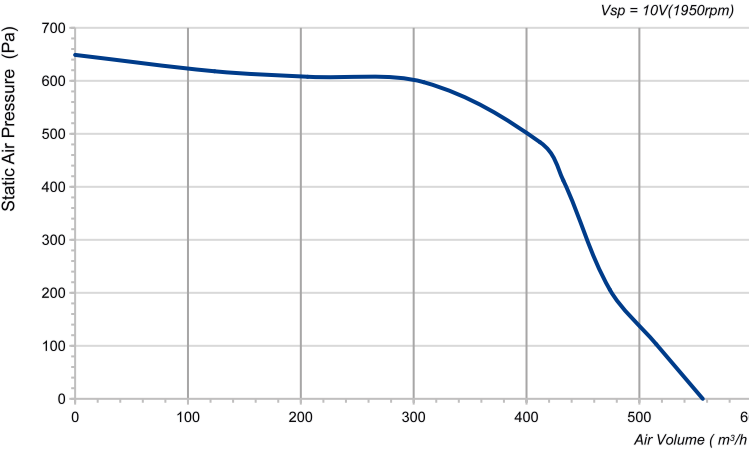

Product Characteristic

- | | | | |
|----------------------|--------------------------------|--------------------------|--------------|
| • Material: | Plastic PA66 | • Type of Protection: | IP54 |
| • Bearing: | Maintenance-free ball bearings | • Insulation Class: | B |
| • Mode of Operation: | S1 | • Operation Temperature: | -30 C ~+60 C |



Technical Specifications

Model	Voltage (V)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Curve
LWFD3G160-092SM-01	24	105	4.4	1950	556	649	62	/
LWFD3G160-092SH-02	48	105	2.2	1950	556	649	62	/

