

LWFD5020 Series



Product Characteristic

- Material: Frame: Plastic(UL94-VO) Impeller: Plastic(UL94-VO)
- Voltage: 5VDC(4.0~5.5VDC), 12VDC(6~13.8VDC), 24VDC(12~27.6VDC)
- Temperature: Operation Temperature: -10~70°C(Non-condensing)
- Specials: AS, RD, FG, PWM, Temperature Control, IP56



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch- H2O	Pa	dBA	g	
LWFD5020KX-01	5	0.6	6500	6.1	0.17	18.2	0.72	179	39.2	34g	①
LWFD5020KH-02	5	0.5	6000	5.6	0.16	15.5	0.61	152	37.5	34g	②
LWFD5020KM-03	5	0.4	5500	5.2	0.15	13.1	0.51	128	35.6	34g	③
LWFD5020KL-04	5	0.35	5000	4.7	0.13	10.8	0.43	106	33.5	34g	④
LWFD5020KD-05	5	0.26	4500	4.2	0.12	8.7	0.34	86	31.2	34g	⑤
LWFD5020LX-01	12	0.28	6500	6.1	0.17	18.2	0.72	179	39.2	34g	①
LWFD5020LH-02	12	0.24	6000	5.6	0.16	15.5	0.61	152	37.5	34g	②
LWFD5020LM-03	12	0.2	5500	5.2	0.15	13.1	0.51	128	35.6	34g	③
LWFD5020LL-04	12	0.16	5000	4.7	0.13	10.8	0.43	106	33.5	34g	④
LWFD5020LD-05	12	0.12	4500	4.2	0.12	8.7	0.34	86	31.2	34g	⑤
LWFD5020MX-01	24	0.18	6500	6.1	0.17	18.2	0.72	179	39.2	34g	①
LWFD5020MH-02	24	0.16	6000	5.6	0.16	15.5	0.61	152	37.5	34g	②
LWFD5020MM-03	24	0.14	5500	5.2	0.15	13.1	0.51	128	35.6	34g	③
LWFD5020ML-04	24	0.12	5000	4.7	0.13	10.8	0.43	106	33.5	34g	④
LWFD5020MD-05	24	0.1	4500	4.2	0.12	8.7	0.34	86	31.2	34g	⑤

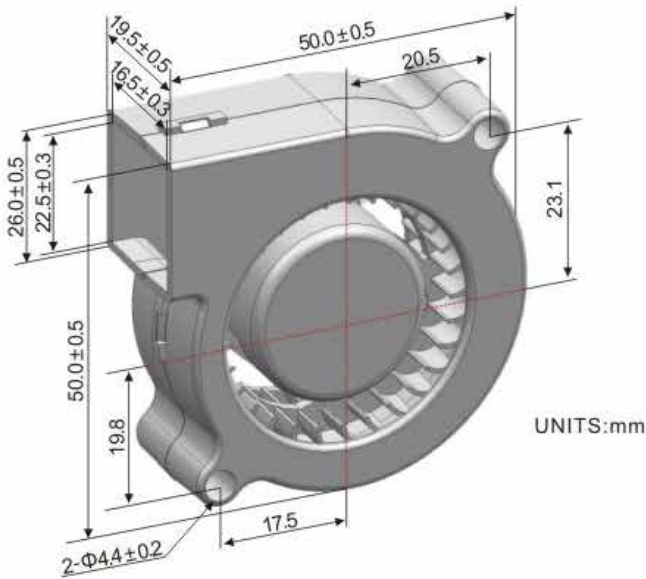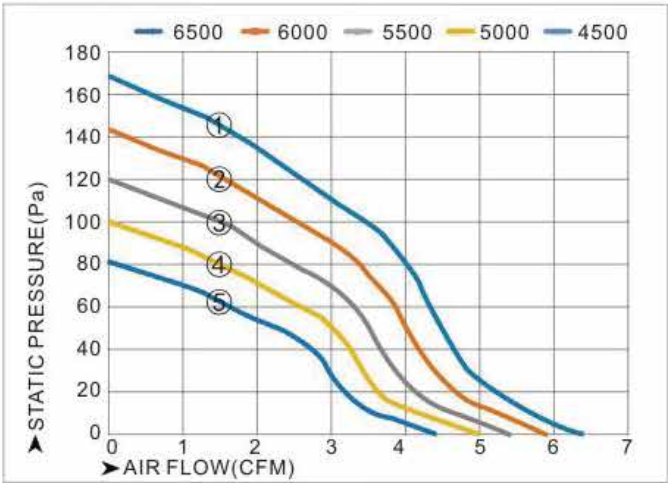

LWFD5025 Series

Product Characteristic

- Material: Frame: Plastic(UL94-VO) Impeller: Plastic(UL94-VO)
- Voltage: 5VDC(4.0~5.5VDC), 12VDC(6~13.8VDC), 24VDC(12~27.6VDC)
- Temperature: Operation Temperature: -10~70°C(Non-condensing)
- Specials: AS, RD, FG, PWM, Temperature Control, IP56



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch- H2O	Pa	dBA	g	
LWFD5025KX-01	5	0.5	5300	6.4	0.18	13.1	0.52	128	37	34g	④
LWFD5025KH-02	5	0.4	5000	6	0.17	11.7	0.46	114	35.7	34g	②
LWFD5025KM-03	5	0.3	4500	5.4	0.15	9.4	0.37	93	33.4	34g	③
LWFD5025KL-04	5	0.25	4000	4.8	0.14	7.5	0.29	73	30.9	34g	④
LWFD5025KD-05	5	0.2	3500	4.2	0.12	5.7	0.22	56	28	34g	⑤
LWFD5025LX-01	12	0.25	5300	6.4	0.18	13.1	0.52	128	37	34g	①
LWFD5025LH-02	12	0.2	5000	6	0.17	11.7	0.46	114	35.7	34g	②
LWFD5025LM-03	12	0.15	4500	5.4	0.15	9.4	0.37	93	33.4	34g	③
LWFD5025LL-04	12	0.12	4000	4.8	0.14	7.5	0.29	73	30.9	34g	④
LWFD5025LD-05	12	0.1	3500	4.2	0.12	5.7	0.22	56	28	34g	⑤
LWFD5025MX-01	24	0.18	5300	6.4	0.18	13.1	0.52	128	37	34g	①
LWFD5025MH-02	24	0.12	5000	6	0.17	11.7	0.46	114	35.7	34g	②
LWFD5025MM-03	24	0.1	4500	5.4	0.15	9.4	0.37	93	33.4	34g	③
LWFD5025ML-04	24	0.08	4000	4.8	0.14	7.5	0.29	73	30.9	34g	④
LWFD5025MD-05	24	0.06	3500	4.2	0.12	5.7	0.22	56	28	34g	⑤

