

LWFD6015 Series



Product Characteristic

- Material: Frame: Plastic(UL94-VO) Impeller: Plastic(UL94-VO)
- Voltage: 5VDC(4.0~5.5VDC), 12VDC(6~13.8VDC), 24VDC(12~27.6VDC)
- Temperature: Operation Temperature: -10~70°C(Non-condensing)
- Specials: AS, RD, FG, PWM, Temperature Control, IP56



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch- -H2O	Pa	dBA	g	
LWFD6015KX-01	5	0.6	5500	4.4	0.12	11.1	0.44	109	43.6	32g	①
LWFD6015KH-02	5	0.5	5000	4	0.11	9.2	0.36	90	41.5	32g	②
LWFD6015KM-03	5	0.4	4500	3.6	0.1	7.5	0.29	73	39.2	32g	③
LWFD6015KL-04	5	0.35	4000	3.2	0.09	5.9	0.23	58	36.7	32g	④
LWFD6015KD-05	5	0.26	3500	2.8	0.08	4.5	0.18	44	33.8	32g	⑤
LWFD6015LX-01	12	0.28	5500	4.4	0.12	11.1	0.44	109	43.6	32g	①
LWFD6015LH-02	12	0.24	5000	4	0.11	9.2	0.36	90	41.5	32g	②
LWFD6015LM-03	12	0.2	4500	3.6	0.1	7.5	0.29	73	39.2	32g	③
LWFD6015LL-04	12	0.16	4000	3.2	0.09	5.9	0.23	58	36.7	32g	④
LWFD6015LD-05	12	0.12	3500	2.8	0.08	4.5	0.18	44	33.8	32g	⑤
LWFD6015MX-01	24	0.18	5500	4.4	0.12	11.1	0.44	109	43.6	32g	①
LWFD6015MH-02	24	0.16	5000	4	0.11	9.2	0.36	90	41.5	32g	②
LWFD6015MM-03	24	0.14	4500	3.6	0.1	7.5	0.29	73	39.2	32g	③
LWFD6015ML-04	24	0.12	4000	3.2	0.09	5.9	0.23	58	36.7	32g	④
LWFD6015MD-05	24	0.1	3500	2.8	0.08	4.5	0.18	44	33.8	32g	⑤

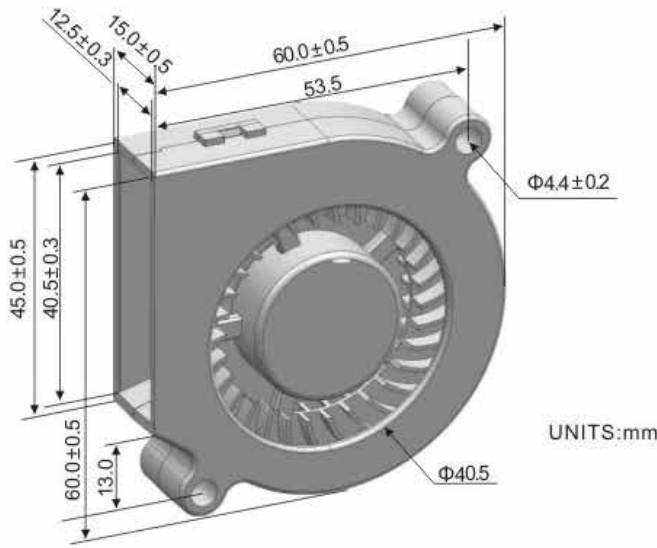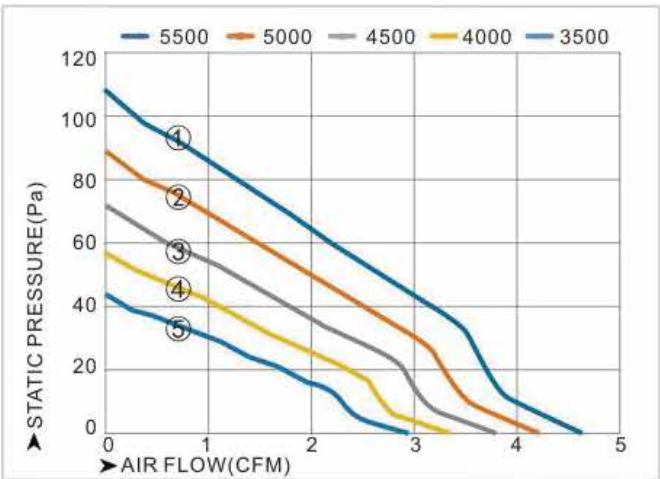

LWFD6025 Series

Product Characteristic

- Material: Frame: Plastic(UL94-VO) Impeller: Plastic(UL94-VO)
- Voltage: 12VDC(6~13.8VDC), 24VDC(12~27.6VDC), 48VDC(24~56VDC)
- Temperature: Operation Temperature: -10~70°C(Non-condensing)
- Specials: AS, RD, FG, PWM, Temperature Control, IP56



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch- -H2O	Pa	dBA	g	
LWFD6025LX-01	12	0.7	7000	14	0.4	42.5	1.67	417	51.2	56g	①
LWFD6025LH-02	12	0.6	6500	13	0.37	36.7	1.44	359	49.6	56g	②
LWFD6025LM-03	12	0.5	6000	12	0.34	31.3	1.23	306	47.9	56g	③
LWFD6025LL-04	12	0.4	5500	11	0.31	26.3	1.03	257	46	56g	④
LWFD6025LD-05	12	0.3	5000	10	0.28	21.7	0.85	213	43.9	56g	⑤
LWFD6025MX-01	24	0.4	7000	14	0.4	42.5	1.67	417	51.2	56g	①
LWFD6025MH-02	24	0.35	6500	13	0.37	36.7	1.44	359	49.6	56g	②
LWFD6025MM-03	24	0.3	6000	12	0.34	31.3	1.23	306	47.9	56g	③
LWFD6025ML-04	24	0.25	5500	11	0.31	26.3	1.03	257	46	56g	④
LWFD6025MD-05	24	0.2	5000	10	0.28	21.7	0.85	213	43.9	56g	⑤
LWFD6025HX-01	48	0.3	7000	14	0.4	42.5	1.67	417	51.2	56g	①
LWFD6025HH-02	48	0.25	6500	13	0.37	36.7	1.44	359	49.6	56g	②
LWFD6025HM-03	48	0.2	6000	12	0.34	31.3	1.23	306	47.9	56g	③
LWFD6025HL-04	48	0.15	5500	11	0.31	26.3	1.03	257	46	56g	④
LWFD6025HD-05	48	0.1	5000	10	0.28	21.7	0.85	213	43.9	56g	⑤

