

LWFD7530 Series



Product Characteristic

- Material: Frame: Plastic(UL94-VO) Impeller: Plastic(UL94-VO)
- Voltage: 12VDC(6~13.8VDC),24VDC(12~27.6VDC),48VDC(24~56VDC)
- Temperature: Operation Temperature: -10~70°C(Non-condensing)
- Specials: AS, RD, FG, PWM, Temperature Control, IP56



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch- -H2O	Pa	dBA	g	
LWFD7530LX-01	12	0.7	4500	16	0.45	31.3	1.23	306	50.6	77g	①
LWFD7530LH-02	12	0.6	4000	14.2	0.4	24.7	0.97	242	48	77g	②
LWFD7530LM-03	12	0.5	3500	12.4	0.35	18.9	0.74	185	45.1	77g	③
LWFD7530LL-04	12	0.4	3000	10.6	0.3	13.9	0.55	136	41.8	77g	④
LWFD7530LD-05	12	0.3	2500	8.9	0.25	9.6	0.38	95	37.8	77g	⑤
LWFD7530MX-01	24	0.4	4500	16	0.45	31.3	1.23	306	50.6	77g	①
LWFD7530MH-02	24	0.35	4000	14.2	0.4	24.7	0.97	242	48	77g	②
LWFD7530MM-03	24	0.3	3500	12.4	0.35	18.9	0.74	185	45.1	77g	③
LWFD7530ML-04	24	0.25	3000	10.6	0.3	13.9	0.55	136	41.8	77g	④
LWFD7530MD-05	24	0.2	2500	8.9	0.25	9.6	0.38	95	37.8	77g	⑤
LWFD7530HX-01	48	0.3	4500	16	0.45	31.3	1.23	306	50.6	77g	①
LWFD7530HH-02	48	0.25	4000	14.2	0.4	24.7	0.97	242	48	77g	②
LWFD7530HM-03	48	0.2	3500	12.4	0.35	18.9	0.74	185	45.1	77g	③
LWFD7530HL-04	48	0.15	3000	10.6	0.3	13.9	0.55	136	41.8	77g	④
LWFD7530HD-05	48	0.1	2500	8.9	0.25	9.6	0.38	95	37.8	77g	⑤

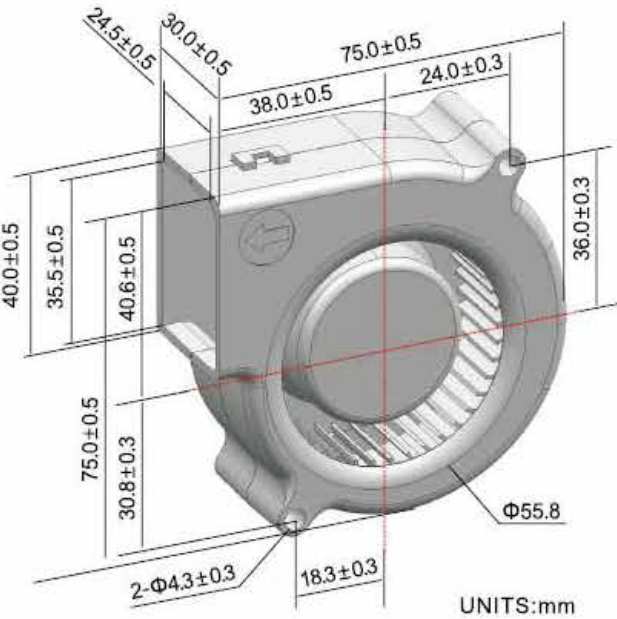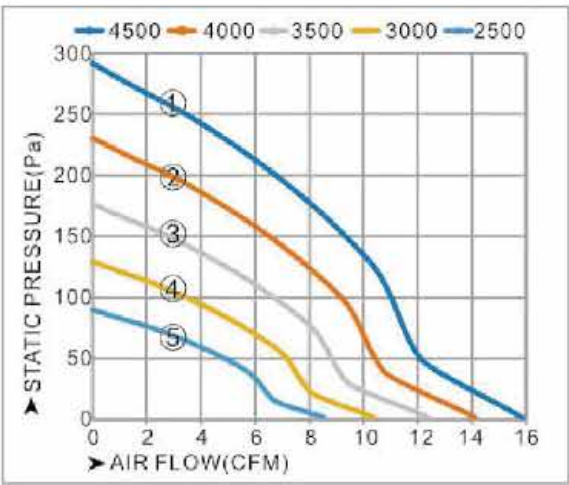

LWFD9733 Series

Product Characteristic

- Material: Frame: Plastic(UL94-VO) Impeller: Plastic(UL94-VO)
- Voltage: 12VDC(6~13.8VDC),24VDC(12~27.6VDC),48VDC(24~56VDC)
- Temperature: Operation Temperature: -10~70°C(Non-condensing)
- Specials: AS, RD, FG, PWM, Temperature Control, IP56



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch- -H2O	Pa	dBA	g	
LWFD9733LX-01	12	1	3500	30	0.85	29.4	1.16	288	50.8	190g	①
LWFD9733LH-02	12	0.8	3000	25.7	0.73	21.6	0.85	212	47.5	190g	②
LWFD9733LM-03	12	0.6	2500	21.5	0.61	15	0.59	147	43.5	190g	③
LWFD9733LL-04	12	0.4	2000	17.2	0.49	9.6	0.38	94	38.7	190g	④
LWFD9733LD-05	12	0.3	1500	12.9	0.36	5.4	0.21	53	32.4	190g	⑤
LWFD9733MX-01	24	0.6	3500	30	0.85	29.4	1.16	288	50.8	190g	①
LWFD9733MH-02	24	0.5	3000	25.7	0.73	21.6	0.85	212	47.5	190g	②
LWFD9733MM-03	24	0.4	2500	21.5	0.61	15	0.59	147	43.5	190g	③
LWFD9733ML-04	24	0.3	2000	17.2	0.49	9.6	0.38	94	38.7	190g	④
LWFD9733MD-05	24	0.2	1500	12.9	0.36	5.4	0.21	53	32.4	190g	⑤
LWFD9733HX-01	48	0.4	3500	30	0.85	29.4	1.16	288	50.8	190g	①
LWFD9733HH-02	48	0.3	3000	25.7	0.73	21.6	0.85	212	47.5	190g	②
LWFD9733HM-03	48	0.2	2500	21.5	0.61	15	0.59	147	43.5	190g	③
LWFD9733HL-04	48	0.15	2000	17.2	0.49	9.6	0.38	94	38.7	190g	④
LWFD9733HD-05	48	0.1	1500	12.9	0.36	5.4	0.21	53	32.4	190g	⑤

