

LWGA097/108 Series


Product Characteristic

- Insulation class: H
- Housing & impeller: Aluminized sheet steel
- Flue temperature: ≤180 °C (continuous)
≤240 °C (instantaneous)
- Motor anti-vibration mounted
- Mounting position must be specified for corresponding support elements



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Volume (m³/h)	Air Pressure (Pa)	Diameter A (mm)
LWGA097S-02	220	50	35	0.3	2000	124	227	97
LWGA108S-01	220	50	47	0.43	2000	139	309	108

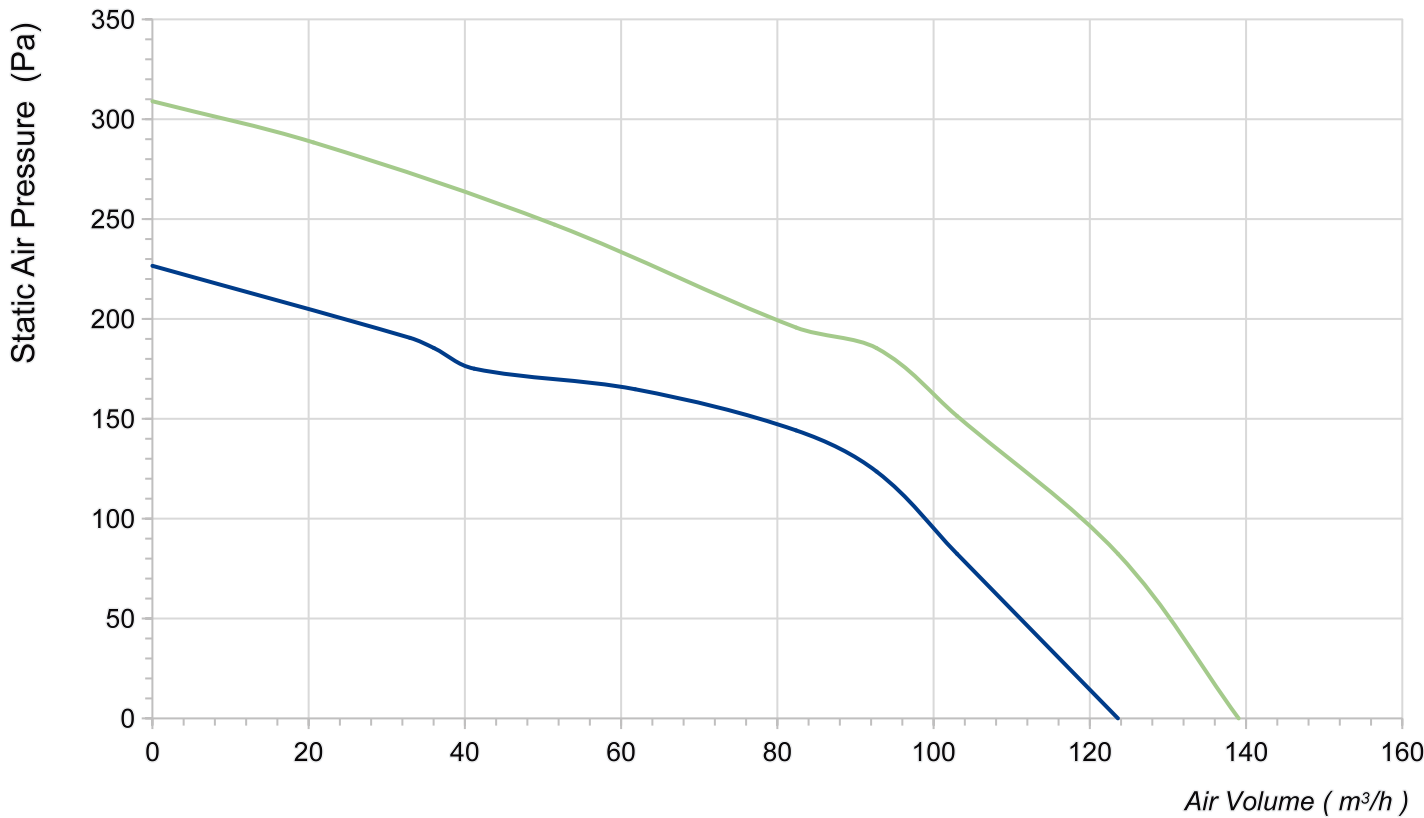

Product Drawing (mm)

