

LWGA108 Series


Product Characteristic

- Insulation class: H
- Housing & impeller: Aluminized sheet steel
- Flue temperature: ≤180 °C (continuous)
≤240 °C (instantaneous)
- Motor anti-vibration mounted
- Mounting position must be specified for corresponding support elements



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Volume (m³/h)	Air Pressure (Pa)	Diameter A (mm)
LWGA108S-04	230	50	53	0.5	2250	148	304	130
LWGA108S-05	230	50	65	0.65	2500	160	314	150

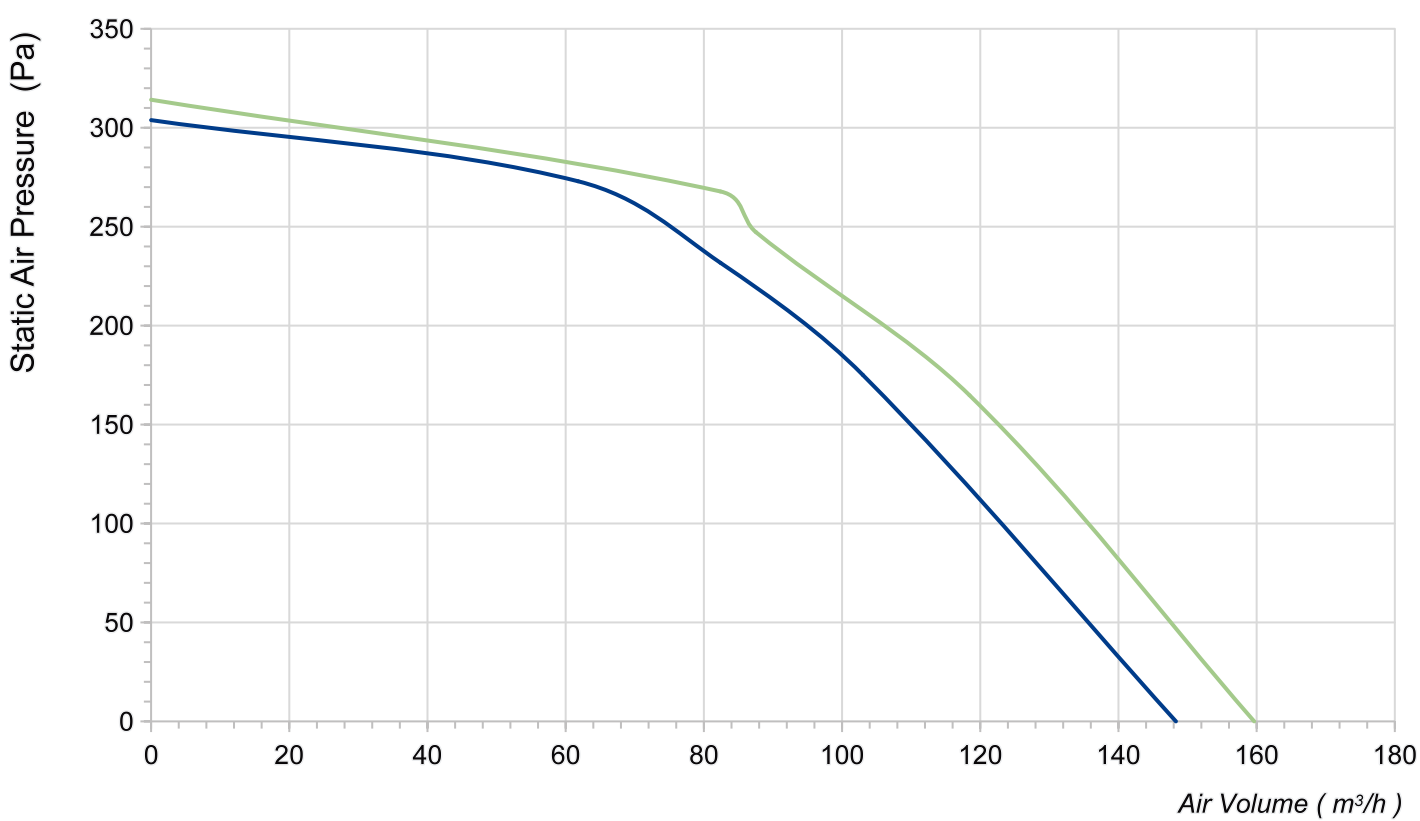

Product Drawing (mm)

