


LWGA133 Series


Product Characteristic

- Insulation class: H
- Housing & impeller: Aluminized sheet steel
- Flue temperature: ≤180 °C (continuous)
≤240 °C (instantaneous)
- Motor anti-vibration mounted
- Mounting position must be specified for corresponding support elements

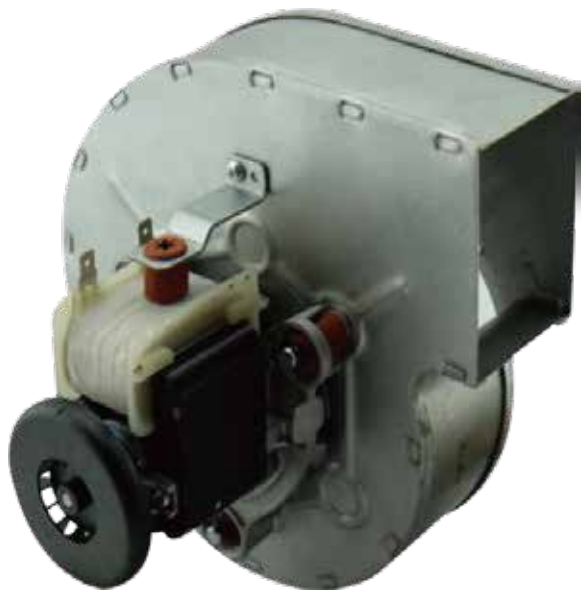

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Volume (m³/h)	Air Pressure (Pa)
LWGA133S-01	220	50	65	0.6	1350	144	361

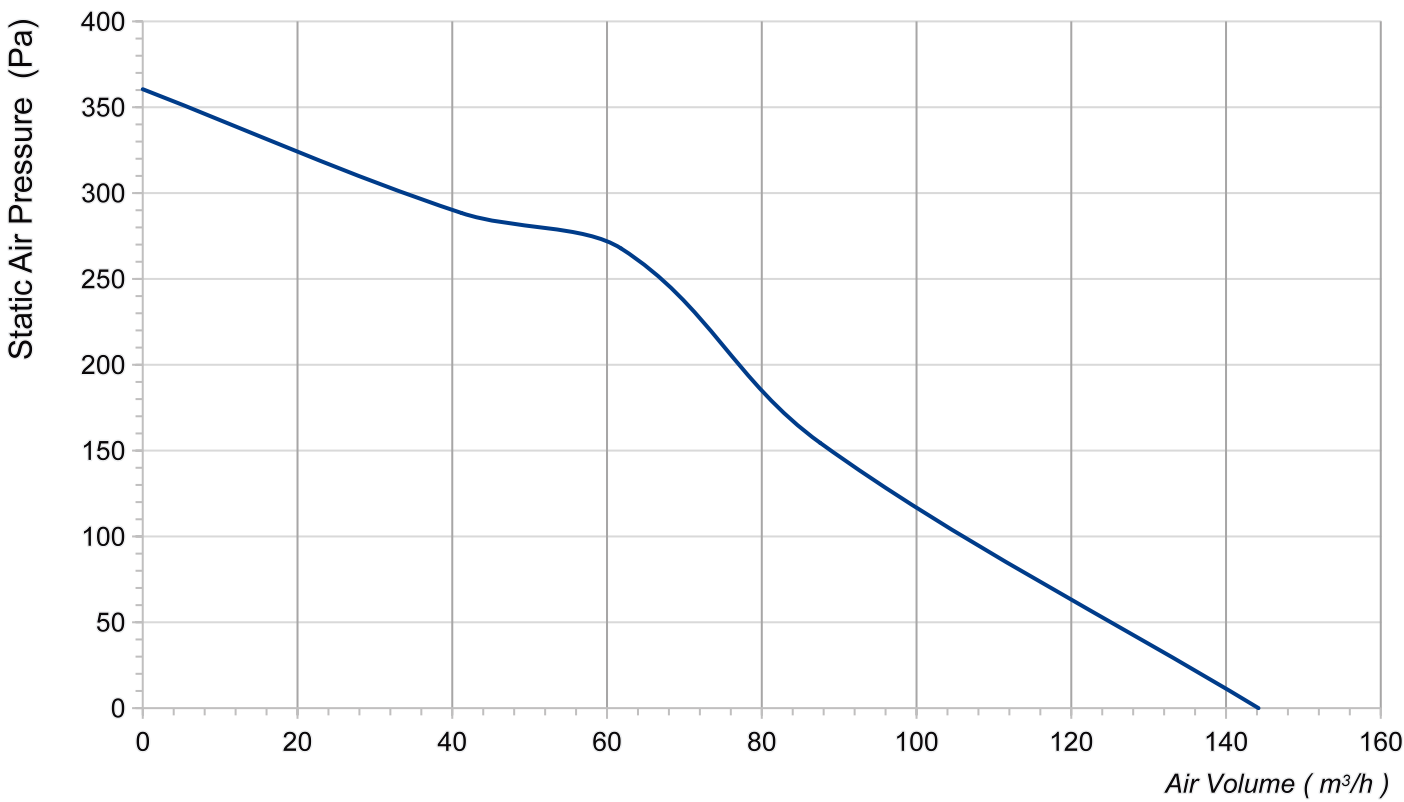

Product Drawing (mm)

