

LWGA180 Series


Product Characteristic

- Insulation class: H
- Housing & impeller: Aluminized sheet steel
- Flue temperature: ≤180 °C (continuous)
≤240 °C (instantaneous)
- Motor anti-vibration mounted
- With speed encoder



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Volume (m³/h)	Air Pressure (Pa)
LWGA180S-01	240	50	75	0.6	2300	160	597

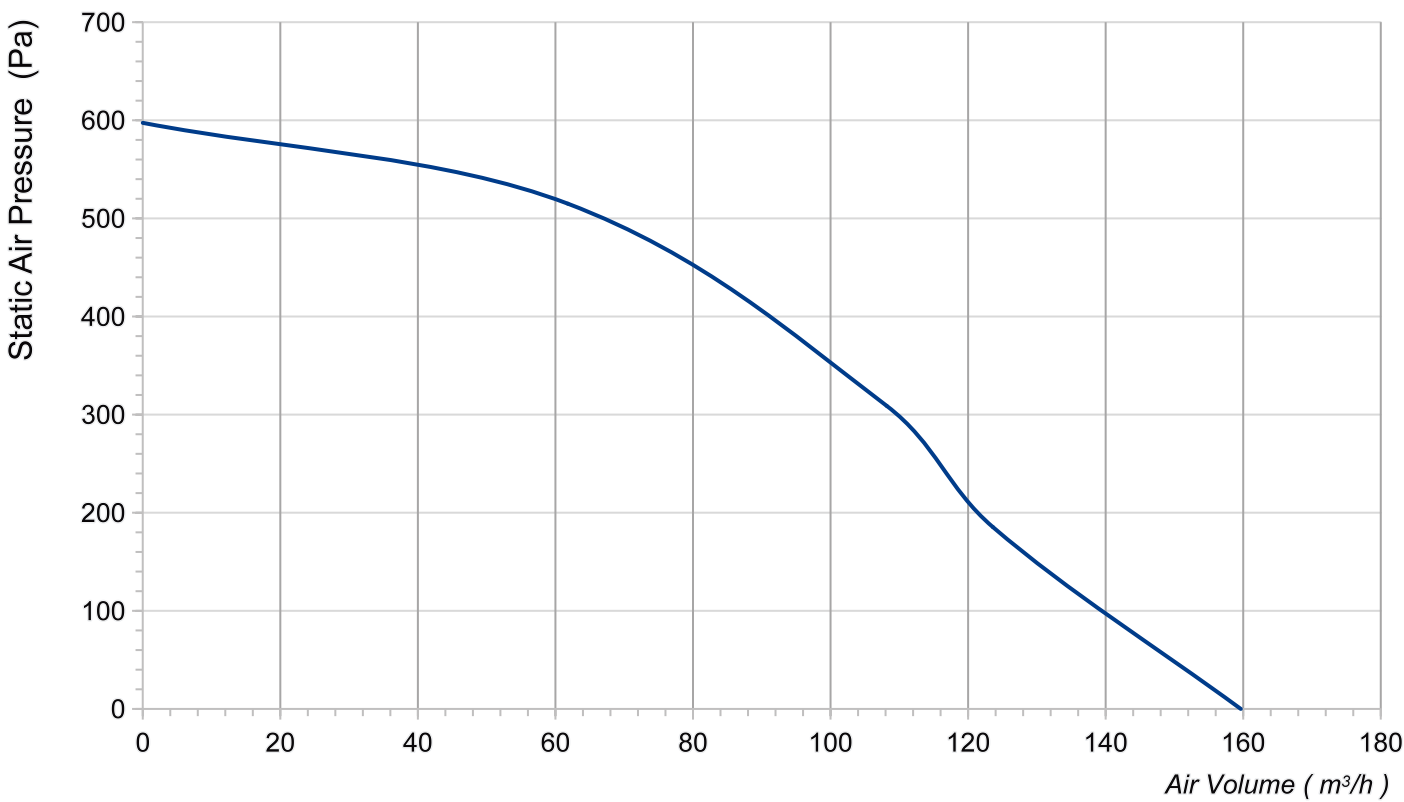

Product Drawing (mm)

