

LWGD108 Series (Premixed Blower)


Product Characteristic

- Insulation class: F
- Housing & impeller: Aluminized sheet steel
- Flue temperature: ≤180 °C (continuous)
≤240 °C (instantaneous)
- Motor anti-vibration mounted
- EC Motor with PWM speed control



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Volume (m³/h)	Air Pressure (Pa)
LWGD108M-01	24DC	/	42	1.7	3700	191	597

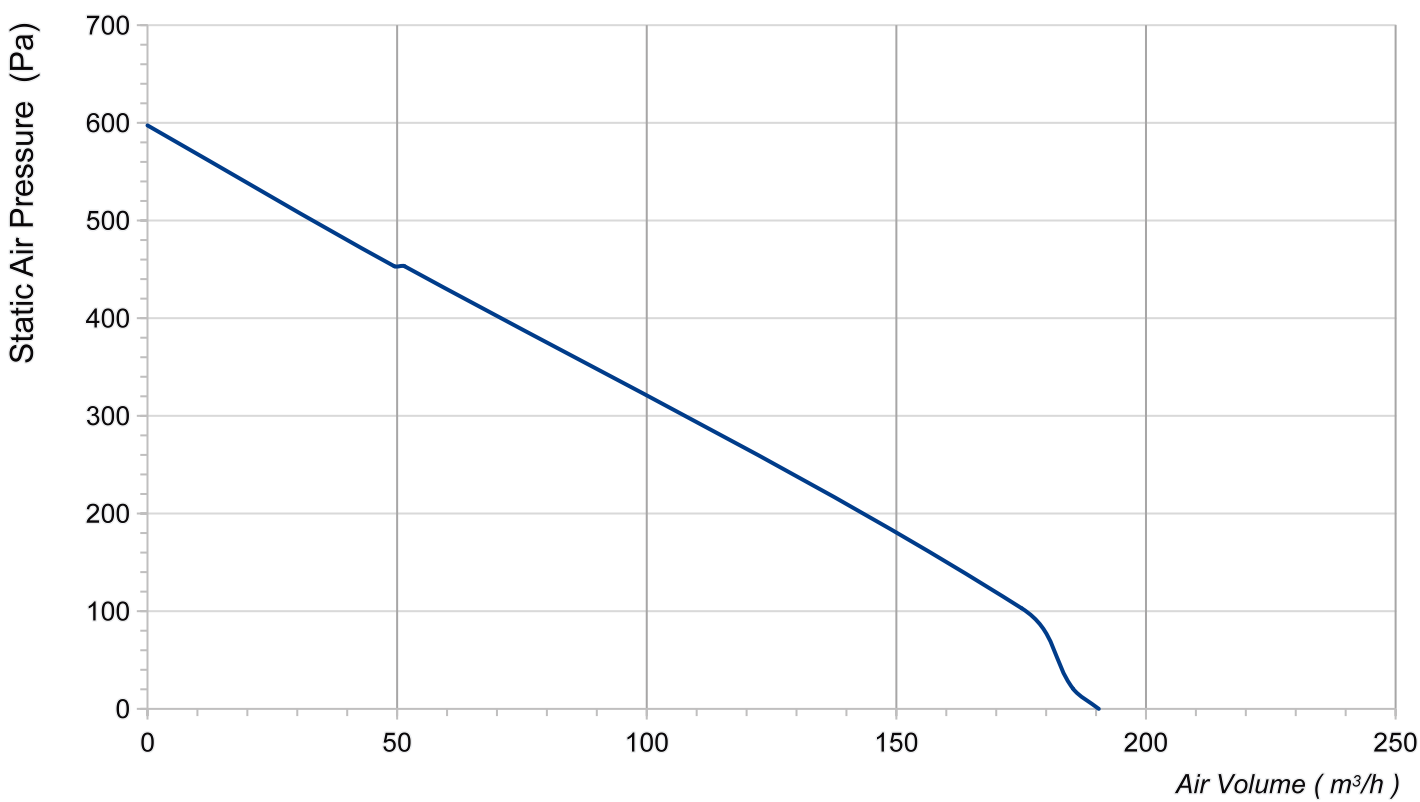

Product Drawing (mm)

