

LWGD150 Series (Exhaust Blower)


Product Characteristic

- Insulation class: F
- Housing & impeller: Aluminized sheet steel
- Flue temperature: ≤180 °C (continuous)
≤240 °C (instantaneous)
- Motor anti-vibration mounted
- Mounting position must be specified for corresponding support elements



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Volume (m³/h)	Air Pressure (Pa)
LWGD150L-01	12DC	/	42	3.52	4000	165	556
LWGD150M-02	24DC	/	41	1.7	4000	165	556

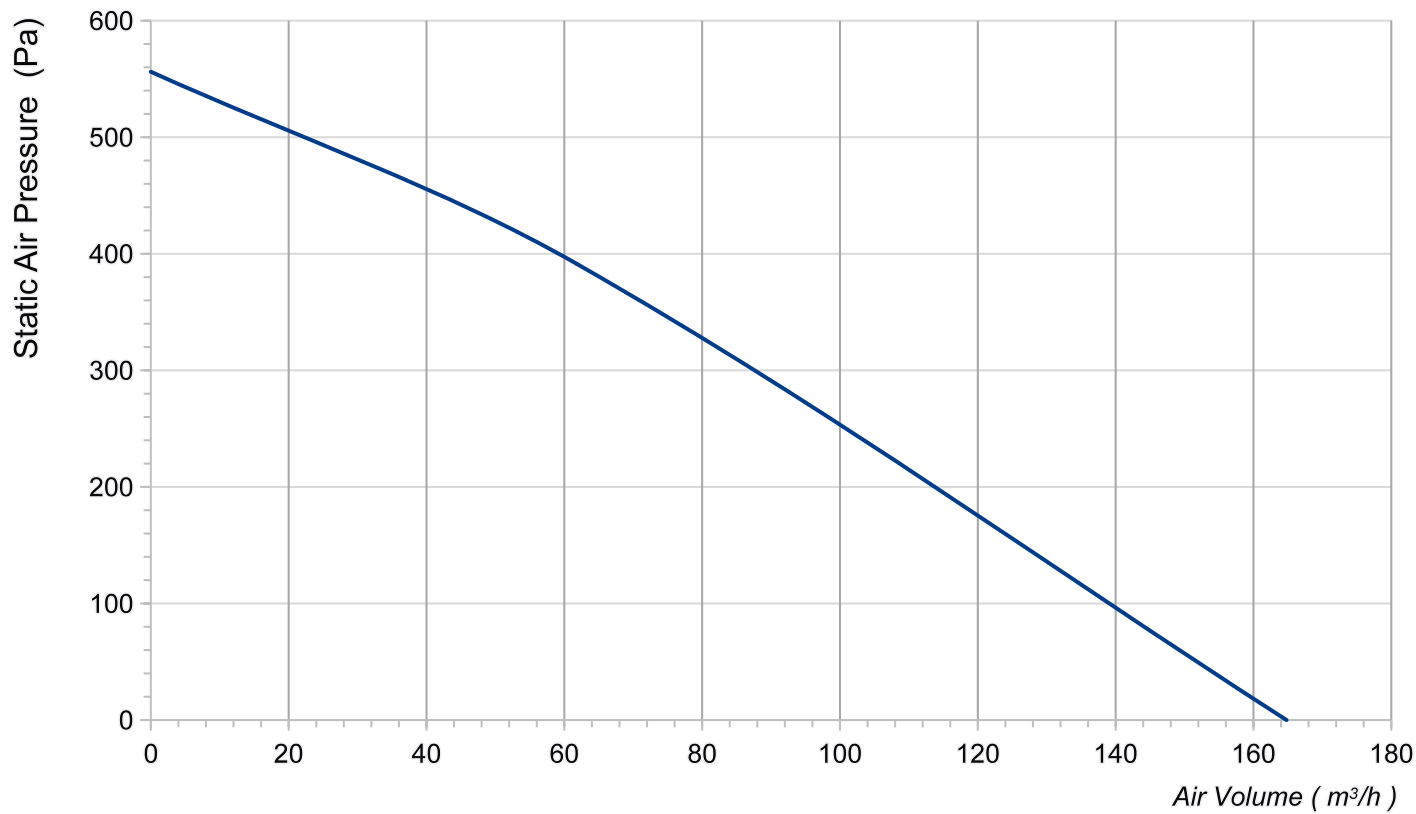

Product Drawing (mm)

