

LWGE118 Series


Product Characteristic

- Protection class: IP20
- Impellers: Plastic
- Insulation Class: Class F
- Housing: Aluminum
- Operating / Storing humidity: 0% to 95% RH
- Operating / Storing Temp: 0°C to + 70° C /-25° C to + 80° C
- Connection port: International standard terminal
- Bearings: Maintenance - free ball bearings
- Way to install: Shaft horizontal or motor mounted on top



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Input Power (W)	Speed (RPM)	Air Volume (m³/h)	Current (A)	Air Pressure (Pa)	Net Weight (kg)
LWGE118S-03	230	50/60	73	10000	120	0.69	3800	1.08
LWGE118U-04	115	50/60	70	10000	110	0.59	3500	1.08

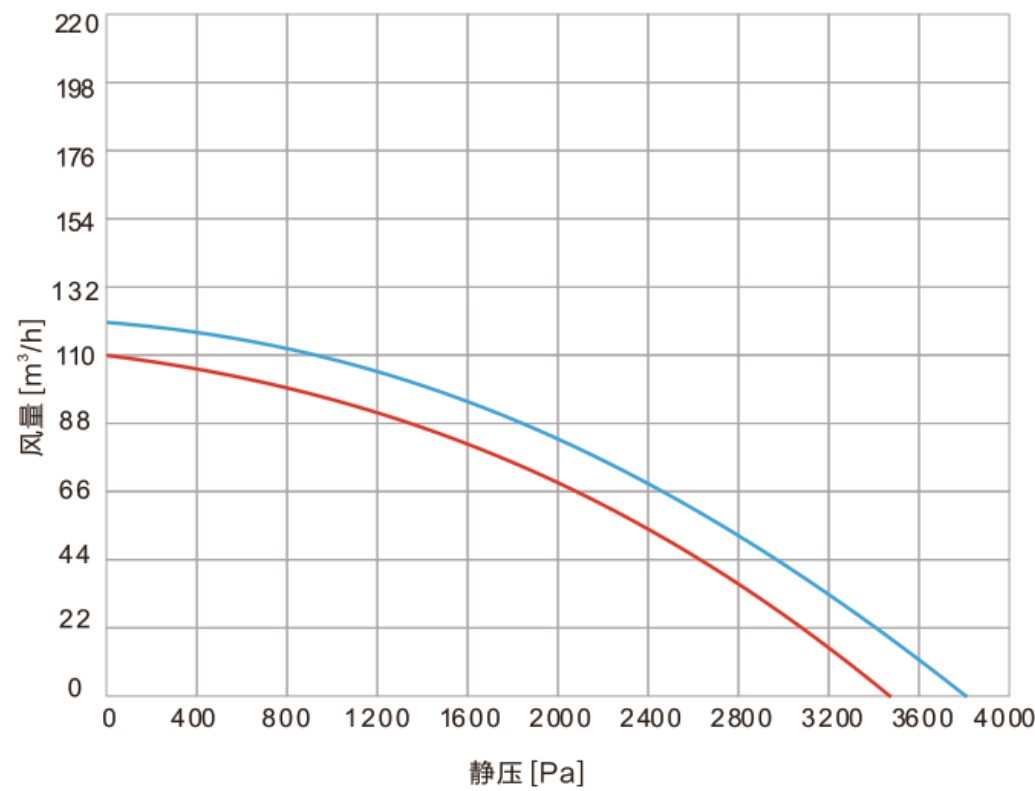

● 220V ● 110V

Product Drawing (mm)

