

LWGE148 Series


Product Characteristic

- Protection class: IP20
- Impellers: Plastic
- Insulation Class: Class F
- Housing: Aluminum
- Operating / Storing humidity: 0% to 95% RH
- Operating / Storing Temp: 0°C to + 70°C /-25°C to + 80°C
- Connection port: International standard terminal
- Bearings: Maintenance - free ball bearings
- Way to install: Shaft horizontal or motor mounted on top



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Input Power (W)	Speed (RPM)	Air Volume (m³/h)	Current (A)	Air Pressure (Pa)	Net Weight (kg)
LWGE148S-01	230	50/60	210	10000	220	1.7	4100	1.9
LWGE148S-02	230	50/60	130	8500	190	1.04	3500	1.9

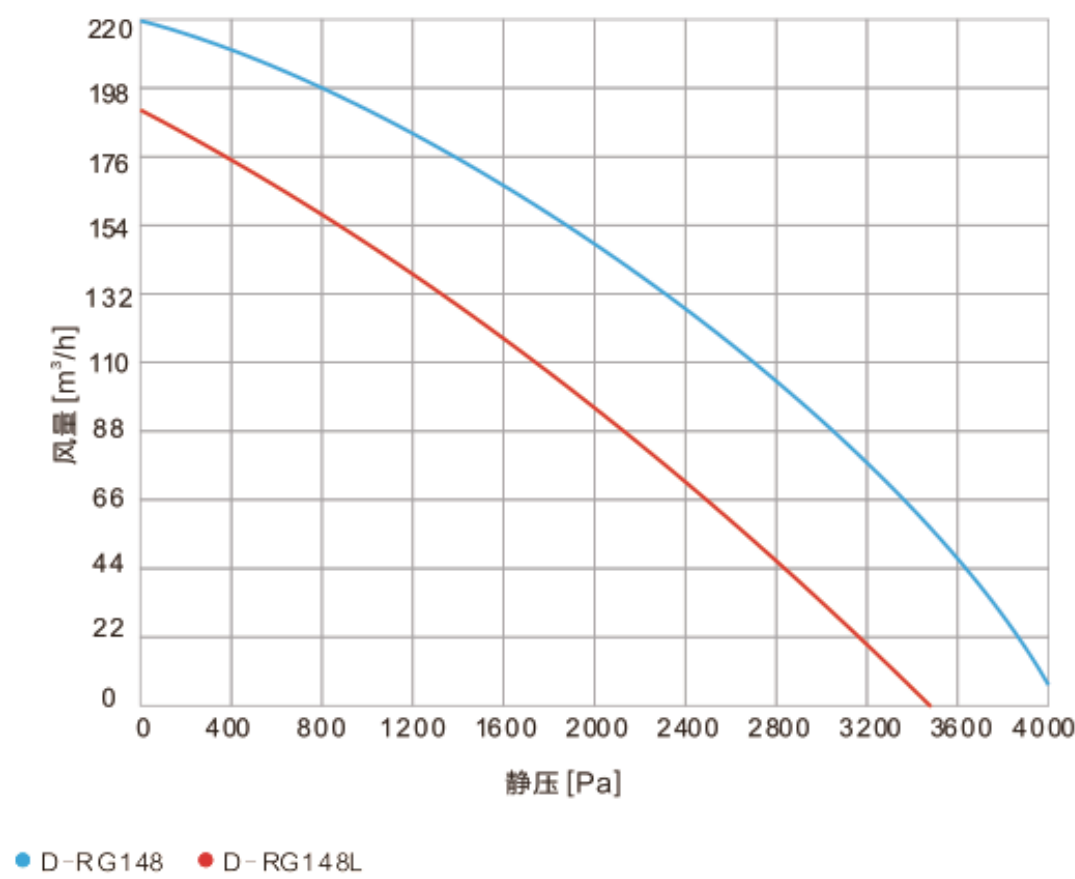

Product Drawing (mm)

