

LWGE148 Series


Product Characteristic

- Protection class: IP20
- Impellers: Plastic
- Insulation Class: Class F
- Housing: Aluminum
- Operating / Storing humidity: 0% to 95% RH
- Operating / Storing Temp: 0°C to + 70°C / -25°C to + 80°C
- Connection port: International standard terminal
- Bearings: Maintenance - free ball bearings
- Way to install: Shaft horizontal or motor mounted on top



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Input Power (W)	Speed (RPM)	Air Volume (m³/h)	Current (A)	Air Pressure (Pa)	Net Weight (kg)
LWGE148U-03	115	50/60	300	9500	260	3.2	4100	2.1
LWGE148S-04	230	50/60	300	9500	260	2.4	4100	2.1

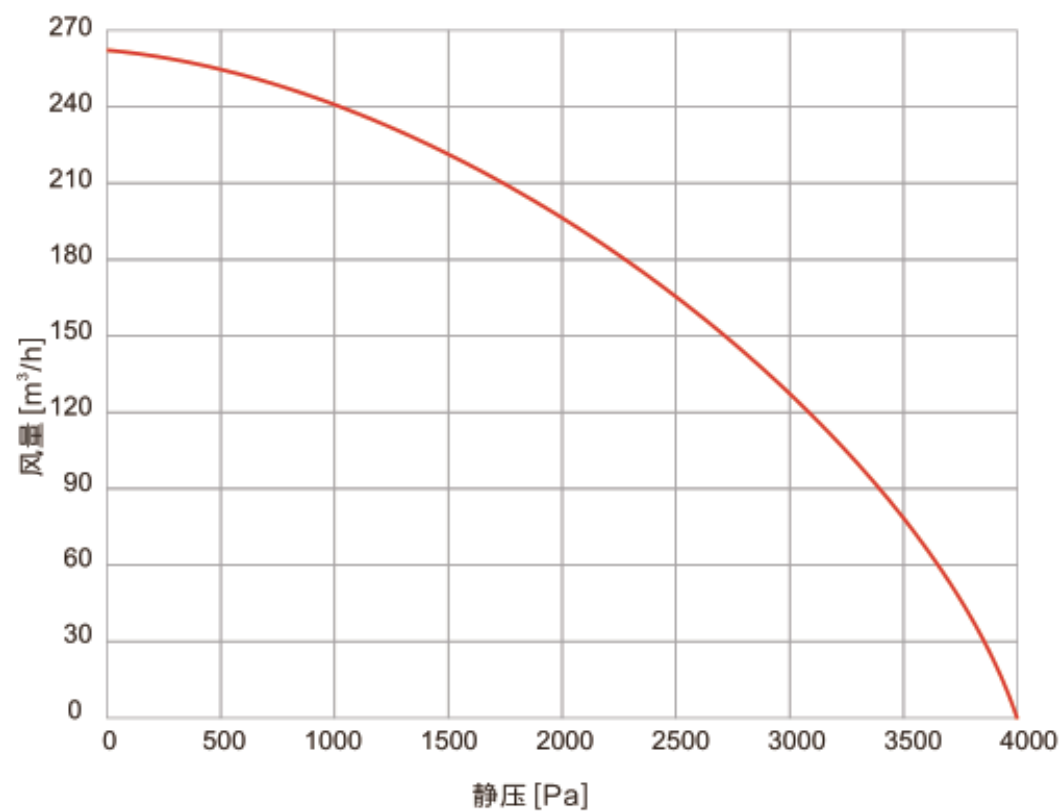

Product Drawing (mm)

