



LWPVA Series

(Frequency conversion version is optional for 18",24"and 36"fan)






18" & 24" with five blades



36" & 50" with three blades



diversion hood is optional for 18",24"

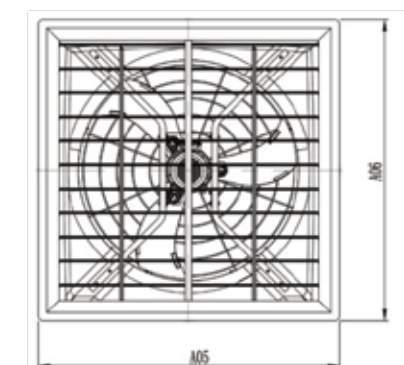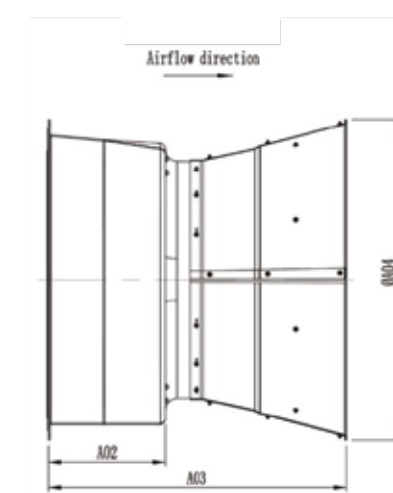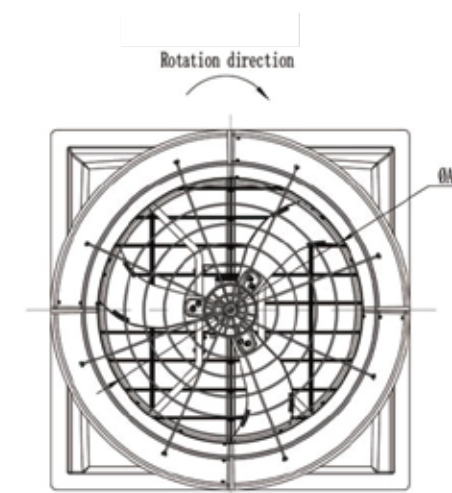

Parameter table

Model		LWPVA-455(18")T -01	LWPVA-625(24")T-01	LWPVA-915(36")T-01	LWPVA-1270(50")T-01
Diameter of blade(inch)		18"	24"	36"	50"
Motor	Voltage(V)	380	380	380	380
	Hertz(Hz)	50	50	50	50
	Phase	3	3	3	3
	Power(KW)	0.37	0.37	0.55	1.1
	Current @0Pa(A)	0.85	1.1	1.66	4.25
Performance	Airflow(m³/hr)	0Pa	7400	13600	22100
		-25Pa	6900	12300	19700
		-50Pa	6300	10800	17300
	Efficiency(CMH/Watt)	25.4	29.2	31.2	31
Features	Drive	Direct drive	Direct drive	Direct drive	Direct drive
	Propeller	5-Aluminum	5-Aluminum	3-Aluminum	3-Aluminum
Dimension(mm)	A01	455	625	915	1270
	A02	368	373	463.5	404
	A03	892	987	1182	1313
	A04	630	850	1270	1724
	A05	715.5	903	1269	1555
	A06	715.5	903	1269	1555
Dimmersion of opening (mm)		615×615	805×805	1150×1150	1440×1440