



LWPVB Series

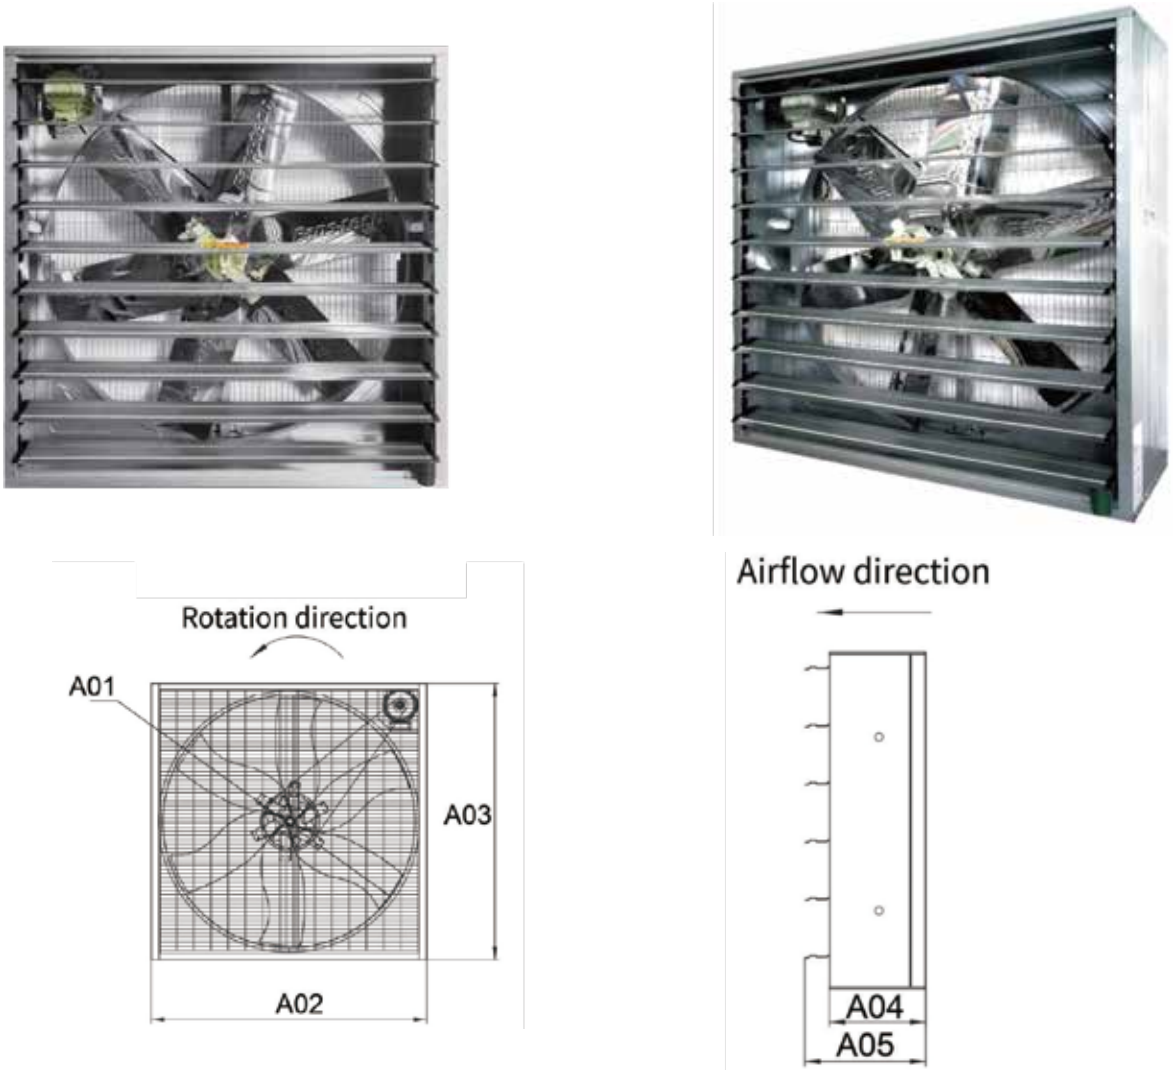

Parameter table

Model			LWPVB-915(36")T(S)-01	LWPVB-1270(50")T(S)-01
Diameter of blade(inch)			36"	50"
Motor	Voltage(V)		380/230	380/230
	Hertz(Hz)		50/60	50/60
	Phase		3	3
	Power(KW)		0.55	1.1
	Current @0Pa(A)		1.7	3
Performance	Airflow(m³/hr)	0Pa	19100	40000
		-25Pa	16400	36000
		-50Pa	13300	30700
	Efficiency(CMH/Watt)		23.3	25
Features	Drive		Direct drive	Direct drive
	Propeller		6-Aluminum	6-Aluminum
Dimension(mm)	A01		915	1270
	A02		1000	1380
	A03		1000	1380
	A04		450	450
	A05		500	500
	Dimmersion of opening (mm)		1020×1020	1440×1440

LWPVB Series

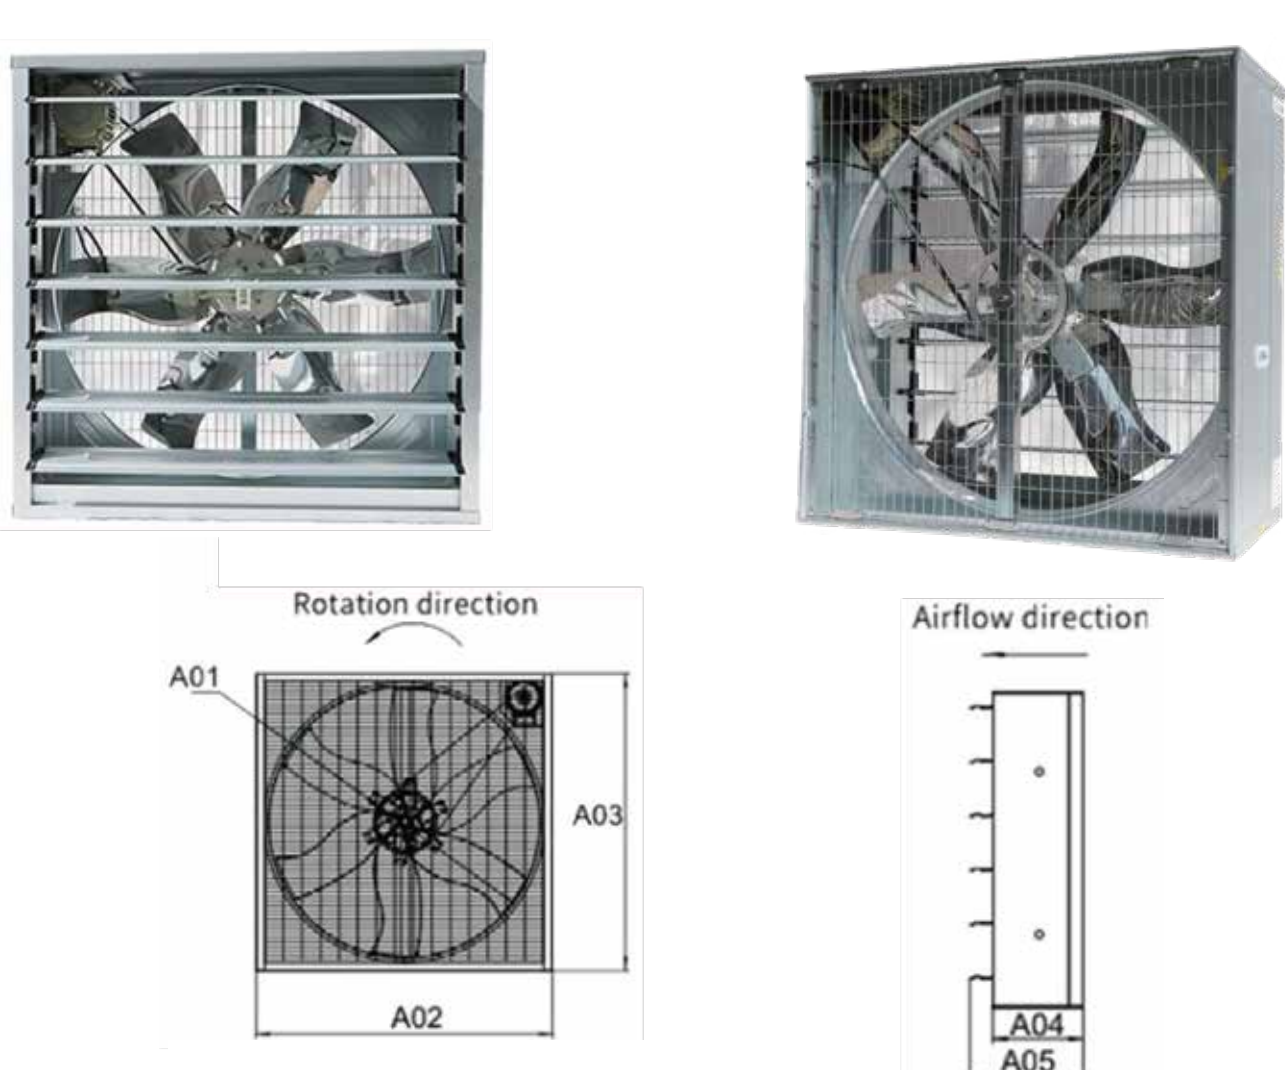

Parameter table

Model			LWPVB-915(36")T(S)-02	LWPVB-1270(50")T(S)-02
Diameter of blade(inch)			36"	50"
Motor	Voltage(V)		380/230	380/230
	Hertz(Hz)		50/60	50/60
	Phase		3	3
	Power(KW)		0.55	1.1
	Current @0Pa(A)		1.7	3
Performance	Airflow(m³/hr)	0Pa	18400	38700
		-25Pa	16080	35500
		-50Pa	12750	30500
	Efficiency(CMH/Watt)		23.3	21.8
Features	Drive		Direct drive	Direct drive
	Propeller		6-Aluminum	6-Aluminum
Dimension(mm)	A01		915	1270
	A02		1000	1380
	A03		1000	1380
	A04		450	450
	A05		500	500
	Dimmersion of opening (mm)		1020×1020	1440×1440