

Push And Pull Type Fan

(Push-pull type)

Model	Height (mm)	Width (mm)	Thickness (mm)
LWPVE-800T -01	800	800	450
LWPVE-1000T -01	1000	1000	450
LWPVE-1100T -01	1100	1100	450
LWPVE-1380T -01	1380	1380	450
LWPVE-1530T -01	1530	1530	450



Product Characteristic

High Class Fan is composed of a blade, motor, outer frame protecting nets and supporting frames and shutters. The shutters are opened by the Push-pull Centrifugal system. The major parts are made of galvanized steel sheets (180g/275g/m2 zinc coating)and stainless steel sheets. Based on sound aerodynamic principles, wind resistance is minimized and efficient airflow is achieved. All products are used in a wide range of settings, including various types of farms, greenhouses and factory buildings.



Technical Specifications


Model	Diameter of blades(mm)	Blades speed(RPM)	Motor speed(RPM)	Air flow (m³/h)	Total pressure (Pa)	Noise [dB(A)]	Input power(W)	Rated voltage(V)
LWPVE-800T -01	710(28")	650	1400	18000	60	≤70	370	380
LWPVE-1000T -01	910(36")	650	1400	26000	60	≤70	550	380
LWPVE-1100T -01	1000(40")	600	1400	33000	70	≤70	750	380
LWPVE-1380T -01	1270(50")	440	1400	43500	56	≤70	1100	380
LWPVE-1530T -01	1400(55")	420	1400	51000	56	≤75	1500	380

Push And Pull Type Fan

(Hammer type)

Product Characteristic

Fans mainly consists of blade, motor, frame, protect net, bracing cage, shutters.The motor drives blade to cause air flow and louver window can open and close automatically to keep the dust from entering.

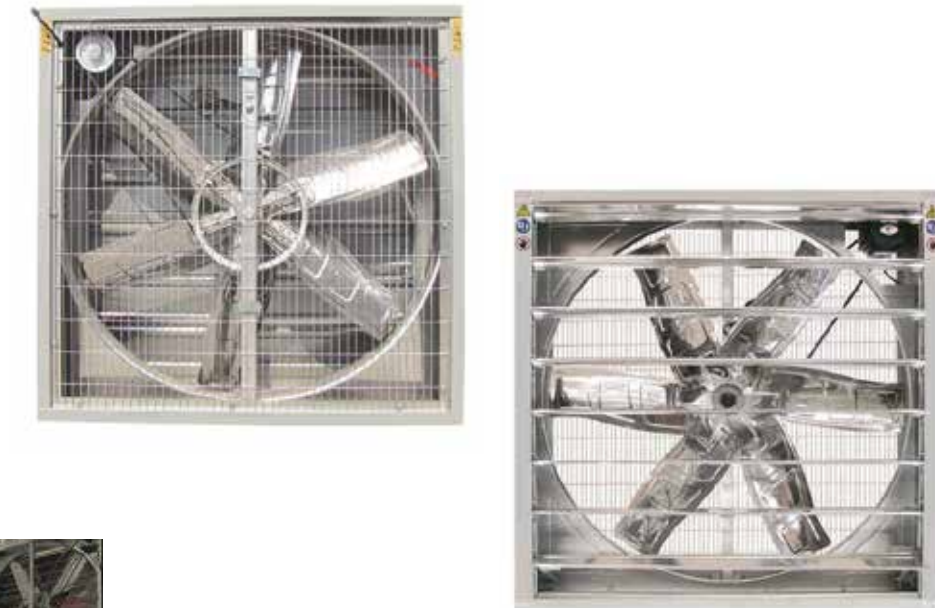

Mainly Applications



Model	Height (mm)	Width (mm)	Thickness (mm)
LWPVE-600(24")T -01	600	600	370
LWPVE-800(29")T -02	800	800	400
LWPVE-900(30")T -01	900	900	400
LWPVE-1000(36")T -01	1000	1000	400
LWPVE-1100(40")T -02	1100	1100	400
LWPVE-1220(44")T -01	1220	1220	400
LWPVE-1380(50")T -01	1380	1380	400
LWPVE-1530(56")T -02	1530	1530	400

Technical Specifications

Model	Diameter of blades(mm)	Blades speed(RPM)	Motor speed(RPM)	Air flow (m³/h)	Total pressure (Pa)	Noise [dB(A)]	Input power(W)	Rated voltage(V)
LWPVE-600(24")T -01	500	680	1400	6500	60	≤60	370	380
LWPVE-800(29")T -02	710	660	1400	22000	60	≤60	370	380
LWPVE-900(30")T -01	750	630	1400	28000	65	≤65	550	380
LWPVE-1000(36")T -01	900	610	1400	30000	70	≤70	550	380
LWPVE-1100(40")T -02	1000	600	1400	32500	70	≤70	750	380
LWPVE-1220(44")T -01	1100	460	1400	38000	73	≤70	1100	380
LWPVE-1380(50")T -01	1250	439	1400	44000	56	≤70	1100	380
LWPVE-1530(56")T -02	1400	325	1400	55800	60	≤70	1500	380