


Вентиляторы LITENED

G1 — выхлоп прямо

G2 — выхлоп вверх

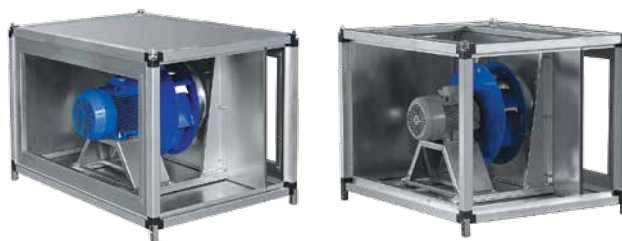

Типораз- мер	Диаметр рабочего колеса, см	Мощность двигателя, кВт	Двигатель	Частота вращения, об/мин	Рабочий ток, А	Напряжение питания, В	А, мм	Б, мм	В, мм	Г, мм	Д, мм	Масса, кг
50-25	22	0,37	63 A2	2730	1,66/0,96	3~220 / 3~380	710	470	635	395	510	43
	25	0,55	63 B2		2,47/1,43							45
50-30	25	0,55	63 B2	2730	2,47/1,43	3~220 / 3~380	710	520	635	445	510	47
	28	1,1	71 B2	2800	4,4/2,52						610	54
	31											
60-30	28	1,1	71 B2	2800	4,4/2,52	3~220 / 3~380	810	520	735	445	610	58
	31											
60-35	31	1,1	71 B2	2800	4,4/2,52	3~220 / 3~380	810	570	735	495	610	60
	31	1,5	80 A2	2880	5,6/3,3							63
	35	2,2	80 B2	2860	8,0/4,6							70
70-40	31	1,1	71 B2	2800	4,4/2,52	3~220 / 3~380	910	620	835	545	610	66
	31	2,2	80 B2	2860	8,0/4,6						710	75
	35											
80-50	35	2,2	80 B2	2860	8,0/4,6	3~220 / 3~380	1010	720	935	645	710	84
	35	3	90 L2		10,5/6,0						88	
	40	4	100 S2		2850						8,0/4,6	3~380 / 3~660
90-50	35	3	90 L2	2860	10,5/6,0	3~220 / 3~380	1125	740	1050	665	710	96
	40	4	100 S2	2850	8,0/4,6	3~380 / 3~660					840	111
	45	3	100 S4	1410	11,6/6,7	3~220 / 3~380						112
100-50	40	4	100 S2	2850	8,0/4,6	3~380 / 3~660	1225	740	1150	665	840	117
	45	3	100 S4	1410	11,6/6,7	3~220 / 3~380						116
	45	4	100 L4		8,5/4,9	3~380 / 3~660						124
	45	5,5	112 M4	1430	11,0/6,5							

