

AT 18/18

Performance certified is for installation type B - free inlet, ducted outlet.

Power rating (kW) does not include transmission losses.

Performance ratings do not include the effects of appurtenances (accessories).

Technical Data

Impeller Data

Impeller diameter	D_r	459	mm
Number of blades	z	48	
Moment of Inertia	J	0.568	kgm ²

Impeller Data

Impeller weight	m	15.2	kg
Density of media	ρ_1	1.2	kg/m ³
Tolerance class (DIN 24166)		2	

Performance Curves

Please note coloured area!

- ☐ all types suitable
- ☒ AT AR only
- ☐ do not use in this area

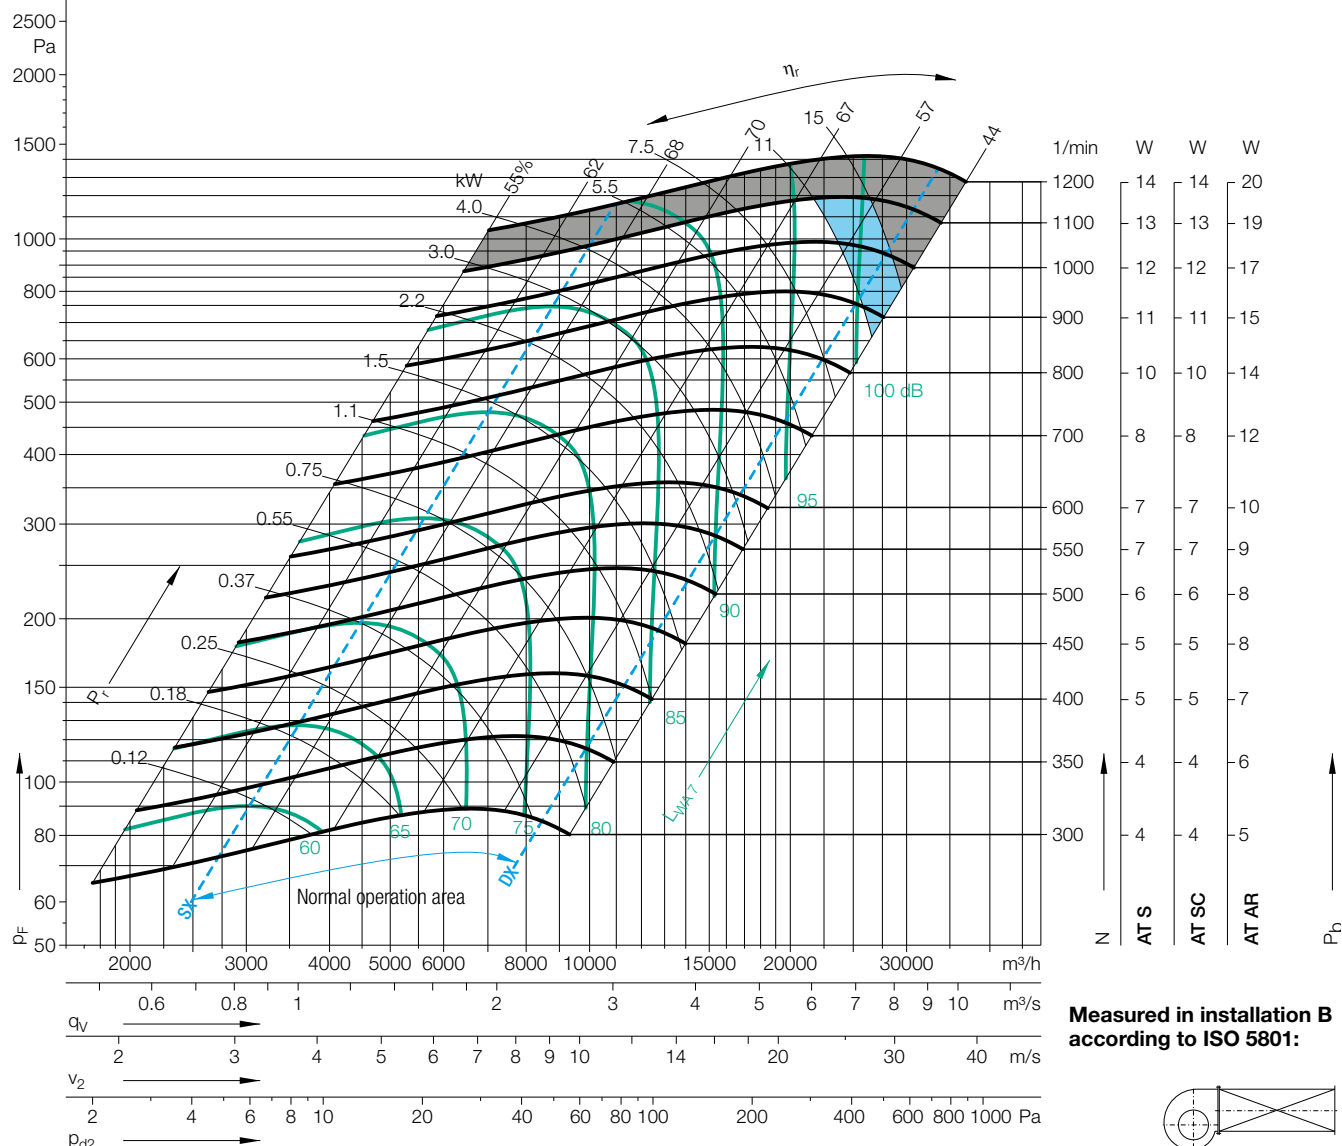


Nicotra Gebhardt S.p.A certifies that the fan shown herein is licensed to bear the AMCA Seal.

The ratings shown are based on tests and procedures performed in accordance with AMCA

Publication 211 and comply with the requirements of the AMCA Certified Ratings Program.

The AMCA Certified Ratings Seal applies to air performance ratings only.

 $\Delta L_{Wrel4}(A)$ Relative sound power level for inlet side L_{Wrel7} at octave centre frequencies f_c

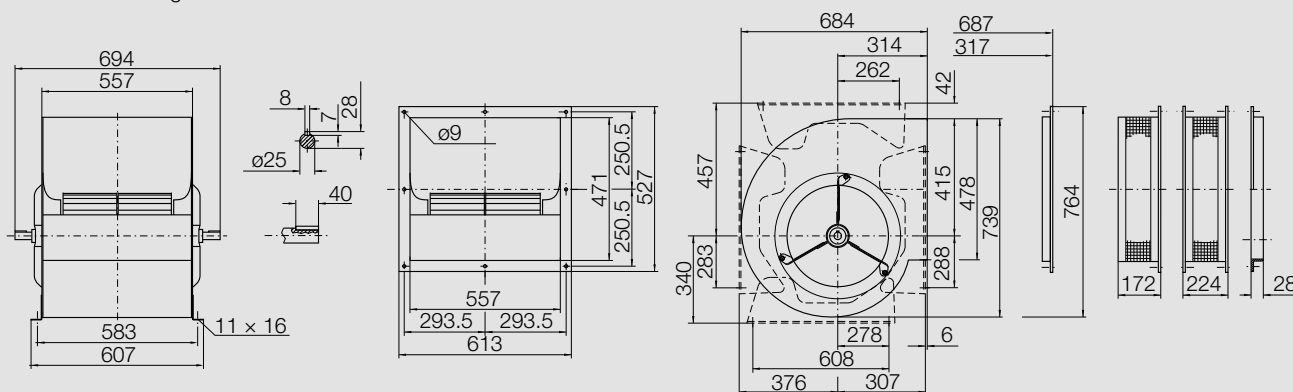
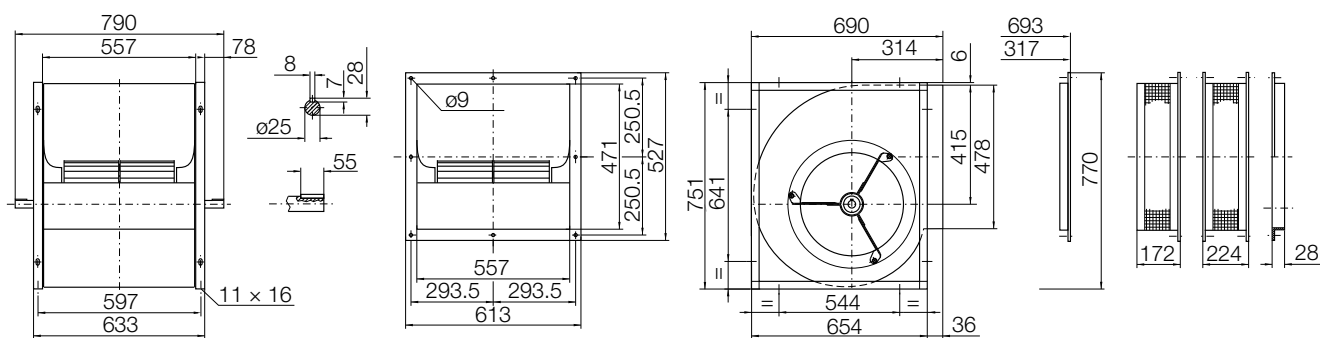
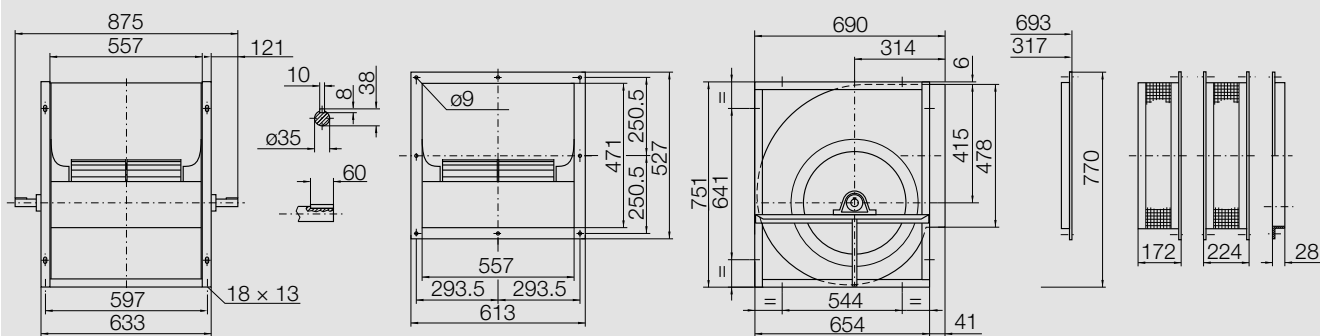
Duty point	Speed 1/min	dB
SX	1000	2
SX	700	2
SX	400	2
Q_{Vopt}	1000	2
Q_{Vopt}	700	2
Q_{Vopt}	400	1
DX	1000	2
DX	700	2
DX	400	1

63	125	250	500	1000	2000	4000	8000	Hz
2	5	-1	-5	-6	-8	-10	-15	dB
6	4	-2	-4	-6	-8	-10	-17	dB
7	1	-2	-3	-5	-7	-13	-21	dB
-3	0	-2	-5	-6	-7	-8	-13	dB
0	0	-3	-4	-6	-7	-9	-16	dB
2	-1	-3	-4	-5	-6	-13	-20	dB
-5	-6	-8	-7	-6	-7	-6	-9	dB
-5	-7	-8	-6	-7	-6	-7	-11	dB
-6	-7	-5	-6	-5	-6	-9	-16	dB

Relative sound power level for discharge side L_{Wrel4} at octave centre frequencies f_c

63	125	250	500	1000	2000	4000	8000	Hz
8	10	3	-2	-4	-7	-8	-13	dB
12	8	2	-2	-4	-6	-9	-16	dB
11	4	0	-2	-4	-6	-12	-21	dB
3	4	1	-2	-5	-6	-7	-12	dB
5	3	0	-3	-5	-5	-8	-15	dB
5	2	-1	-3	-3	-5	-12	-21	dB
1	-2	-4	-4	-4	-5	-5	-8	dB
0	-3	-4	-3	-5	-5	-6	-11	dB
-2	-4	-2	-4	-4	-4	-9	-17	dB

Оформить
Заказ

AT 18/18**Dimensions** in mm, subject to change.**AT S-18/18** 32.5 kg**AT SC-18/18** 38.2 kg**AT AR-18/18** 38.2 kg
**Оформить
Заказ**