

AT 28/20

Performance certified is for installation type B - free inlet, ducted outlet.

Power rating (kW) does not include transmission losses.

Performance ratings do not include the effects of appurtenances (accessories).

Technical Data

Impeller Data

Impeller diameter	D_r	710	mm
Number of blades	z	56	
Moment of Inertia	J	3.204	kgm ²

Impeller Data

Impeller weight	m	31	kg
Density of media	ρ_1	1.2	kg/m ³
Tolerance class (DIN 24166)		2	

Performance Curves

Please note coloured area!

- ☐ all types suitable
☒ do not use in this area





Nicotra Gebhardt S.p.A certifies that the fan shown herein is licensed to bear the AMCA Seal.

The ratings shown are based on tests and procedures performed in accordance with AMCA

Publication 211 and comply with the requirements of the AMCA Certified Ratings Program.

The AMCA Certified Ratings Seal applies to air performance ratings only.

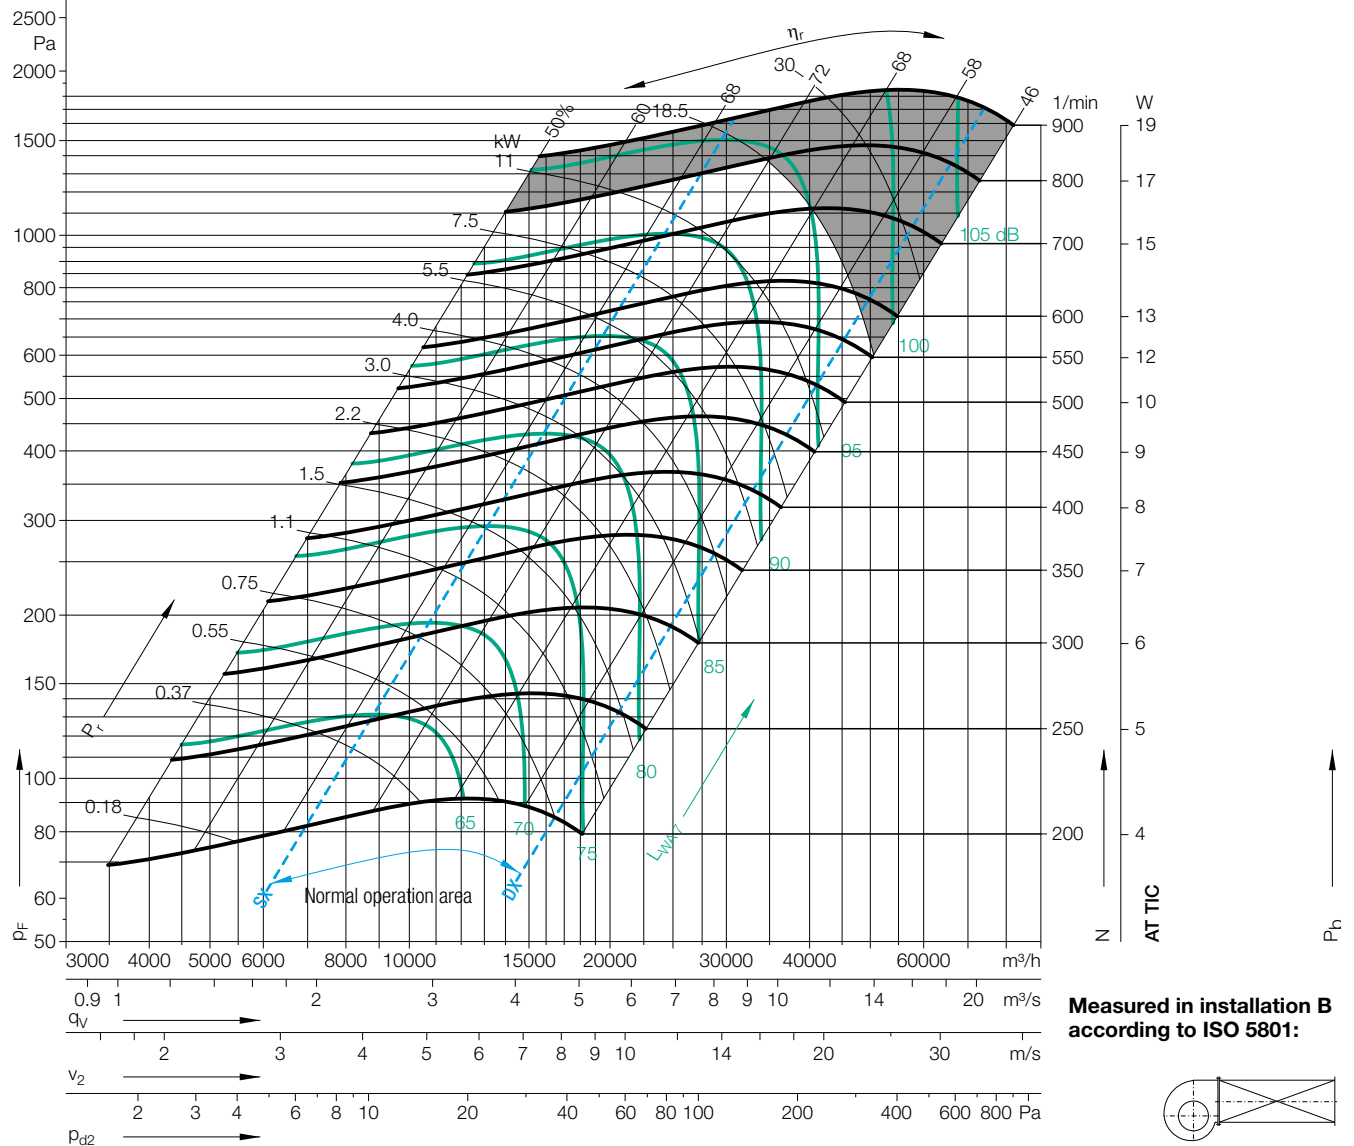

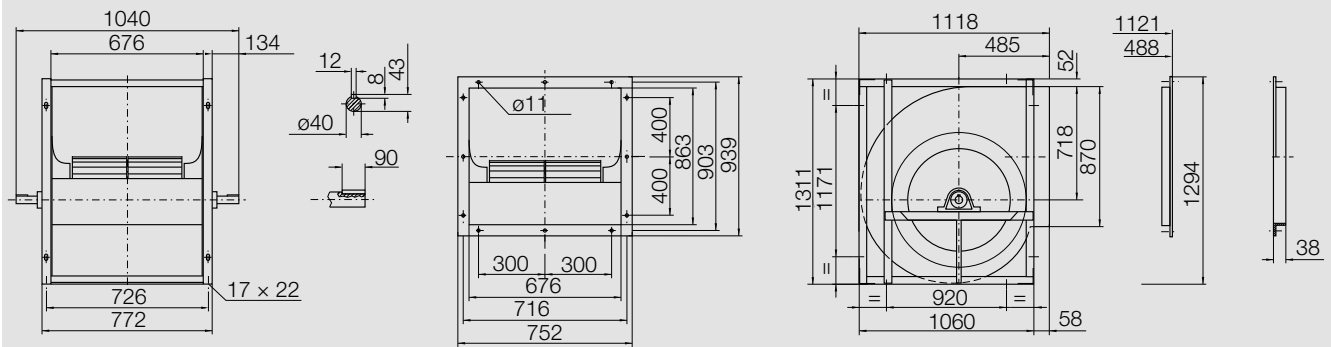AT 28/20**Dimensions** in mm, subject to change.**AT TIC-28/20** 120 kg**Оформить
Заказ**