
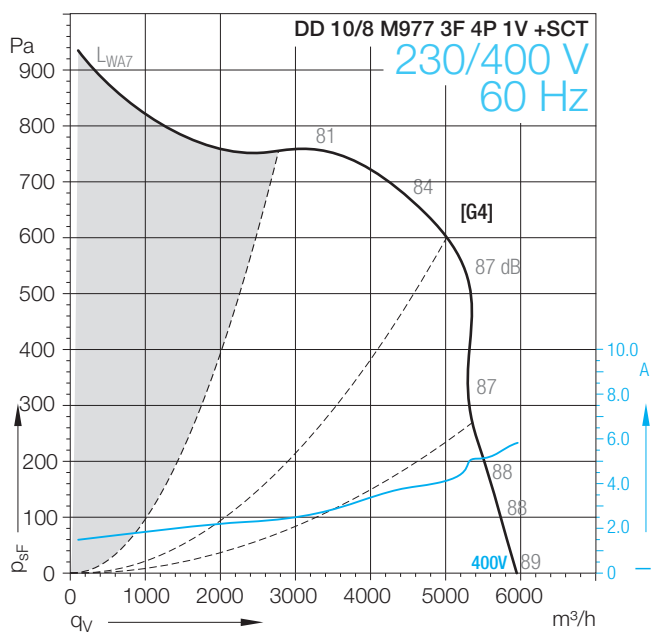
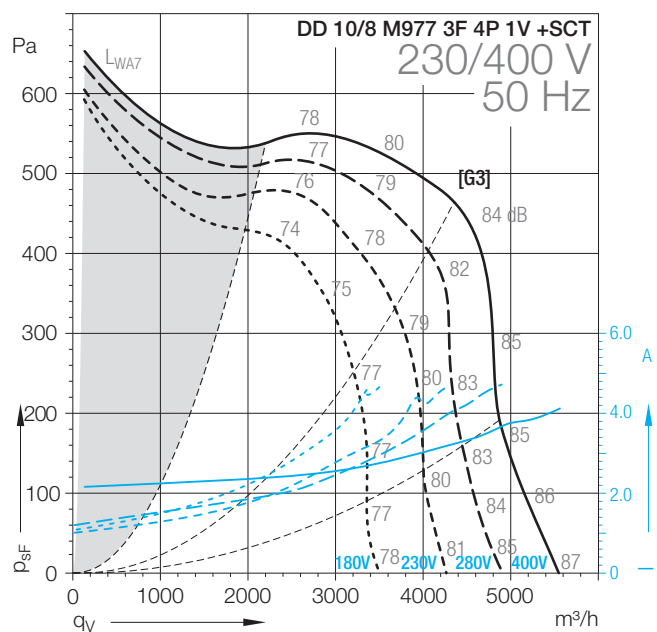


DD-10/8

Technical Data

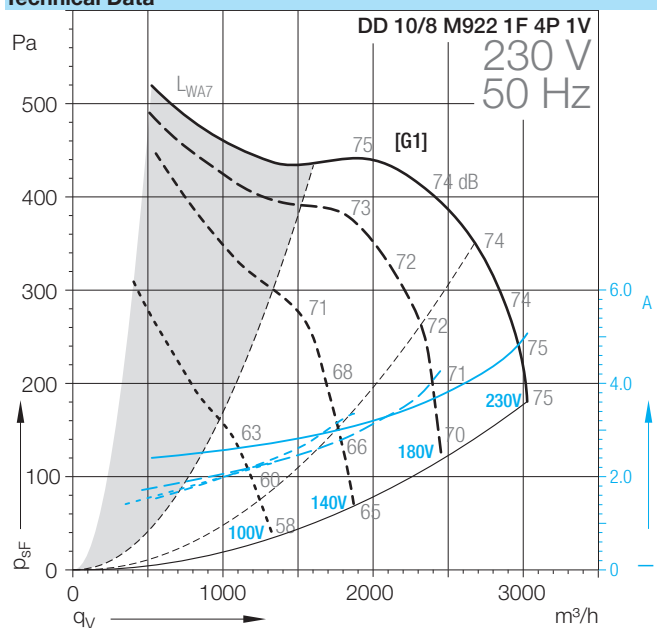

Оформить
Заказ

DD-10/8

Technical Data

	Speed control	Curves	Nominal motor power W	Poles —	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
DD 10/8										
M922 1F 4P 1V	(2)	[G1]	373	4	1~		50	1163	4.8	1380
M977 3F 4P 1V +SCT	*	[G3/G4]	1500	4	3~	Δ/Y	50/60	2509	4.7	1360

Technical Data

	Operating Capacitor μF	Nominal capacitor voltage V	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max. °C	Fan weight kg	Density of media kg/m³	Installation type (ISO 5801)	Article number
DD 10/8										
M922 1F 4P 1V	12.5	450	IP20	F	INT	40	13	1.2	B	6M0652
M977 3F 4P 1V +SCT			IP20	B	EXT	40	22	1.2	B	6M09Y3

(1) = Speed controllable via Transformer

(2) = Speed controllable via TRIAC or Transformer

(3) = Speed controllable via Inverter



* = No speed control available

[HI] High speed, [ME] Medium speed, [LO] Low speed



Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7} , see „Technical Description“.

Dimensions in mm, subject to change.

DD 10/8 M922 1F 4P 1V

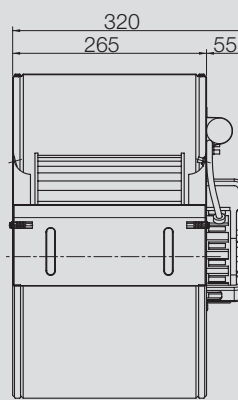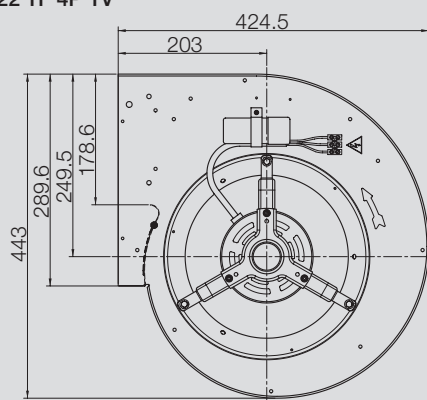





DD 10/8 M977 3F 4P 1V +SCT

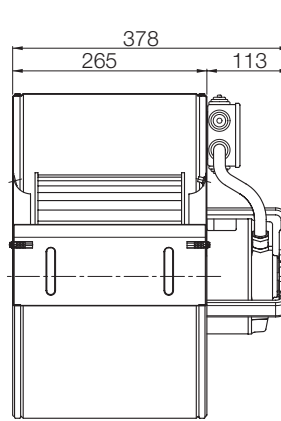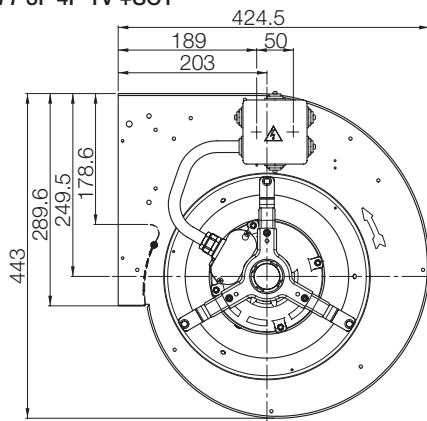

Оформить
Заказ

DD-10/8

Technical Data

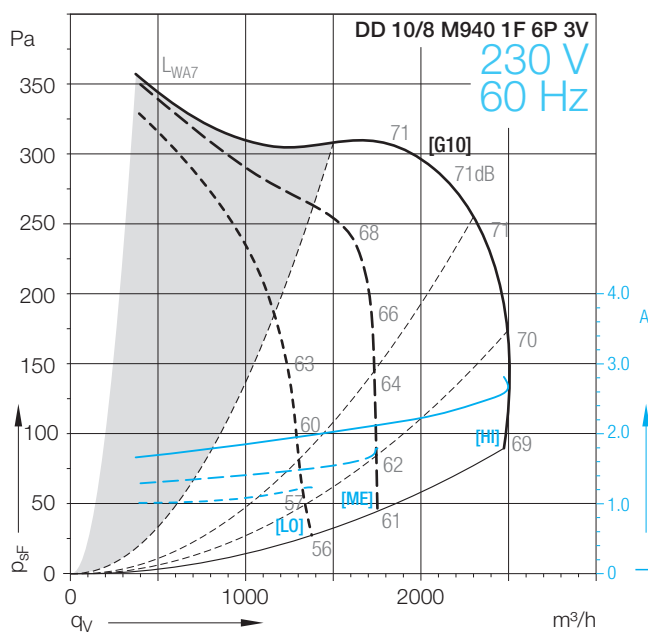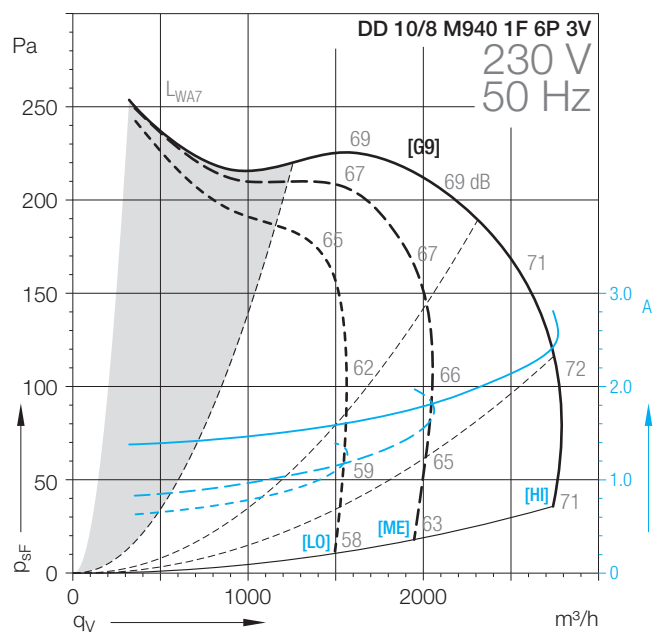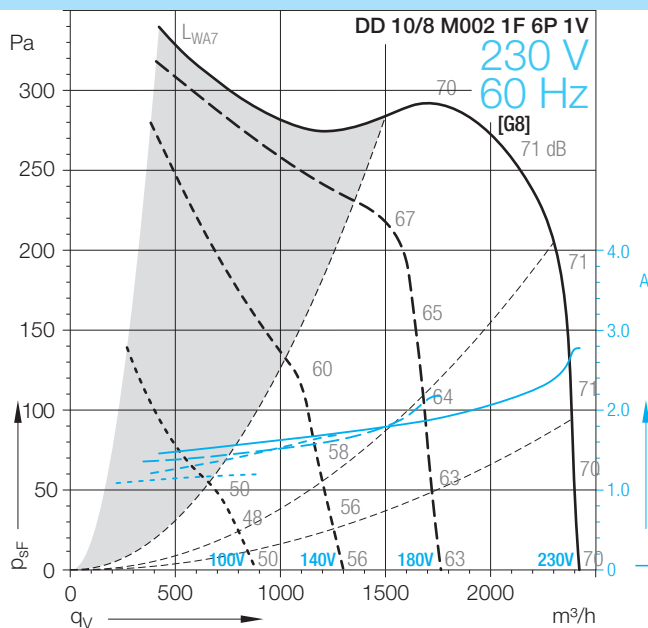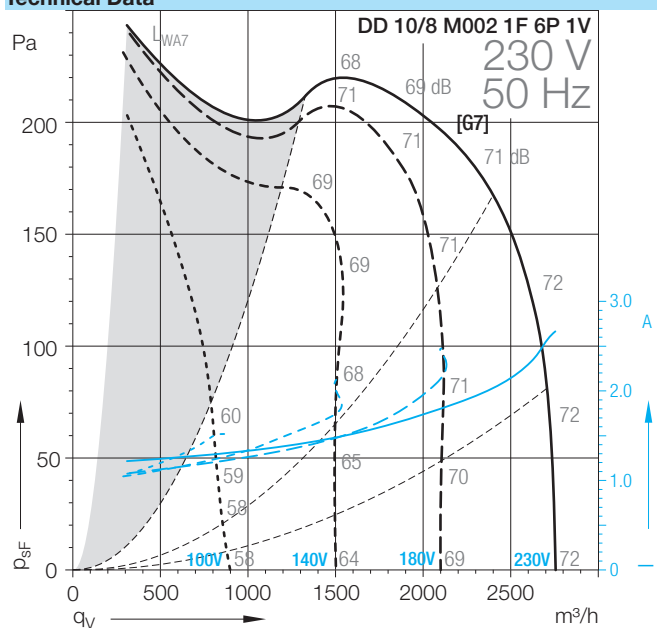

Оформить
Заказ

DD-10/8


Technical Data										
	Speed control	Curves	Nominal motor power	Poles	Phases	Connection	Mains frequency	Max. power consumption	Max. current consumption	Speed
DD 10/8			W	—			Hz	W	A	1/min
M002 1F 6P 1V	(1)	[G5/G6]	245	6	1~		50/60	591	2.6	850
M940 1F 6P 3V	*	[G7/G8]	245	6	1~		50/60	625	2.6	880

Technical Data										
	Operating Capacitor	Nominal capacitor voltage	Motor protection class	Motor ther- mal class	Thermal protection	Media Temperature max.	Fan weight	Density of media	Installation type (ISO 5801)	Article number
DD 10/8	µF	V				°C	kg	kg/m³		
M002 1F 6P 1V	8	450	IP20	F	INT	60	13	1.2	B	6M0312
M940 1F 6P 3V	8	500	IP20	F	INT	40	13	1.2	B	6M0648


(1) = Speed controllable via Transformer
(2) = Speed controllable via TRIAC or Transformer
(3) = Speed controllable via Inverter
* = No speed control available

[HI] High speed, [ME] Medium speed, [LO] Low speed
Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7} , see „Technical Description“.

Dimensions in mm, subject to change.
DD 10/8 M002 1F 6P 1V

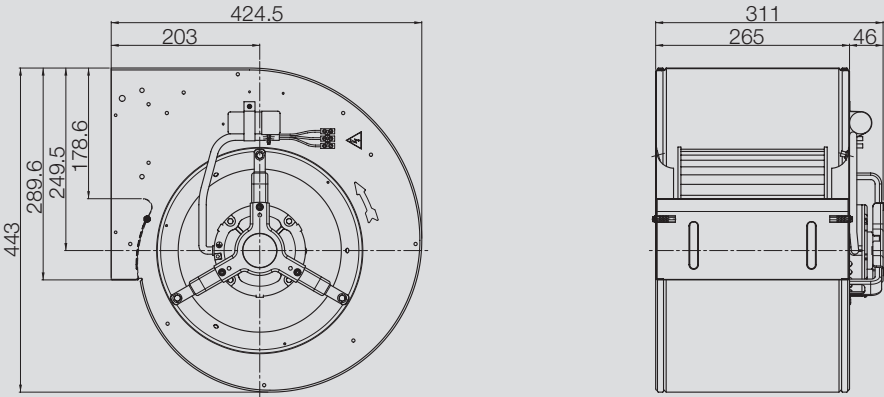

DD 10/8 M940 1F 6P 3V

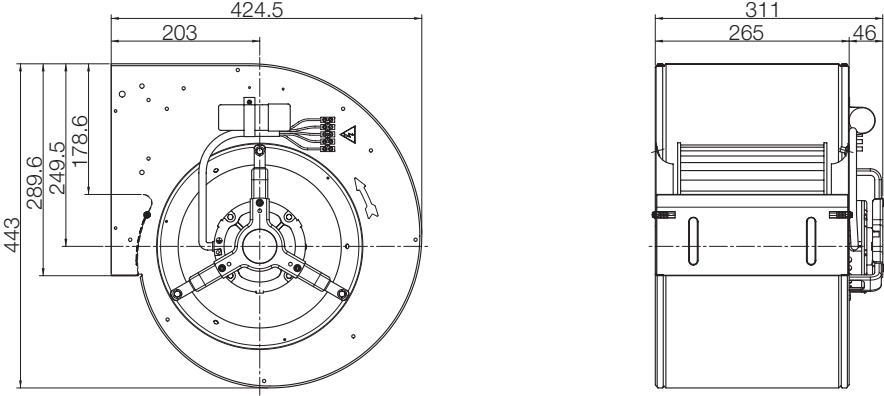

Оформить
Заказ