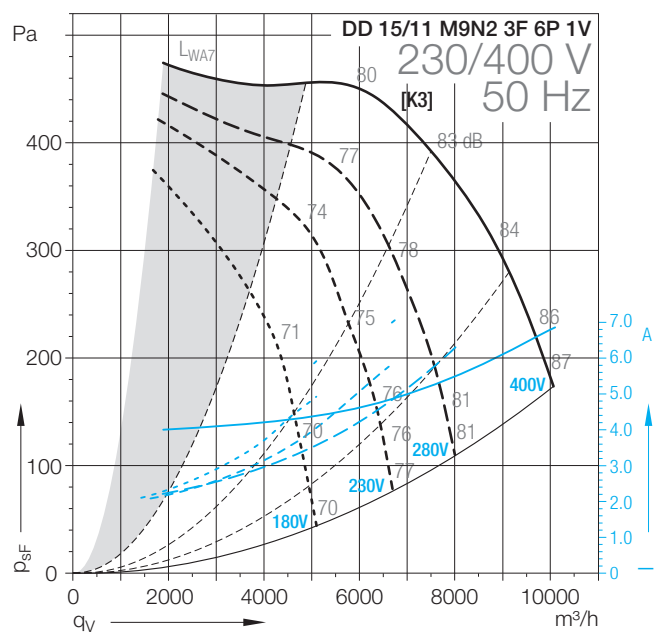
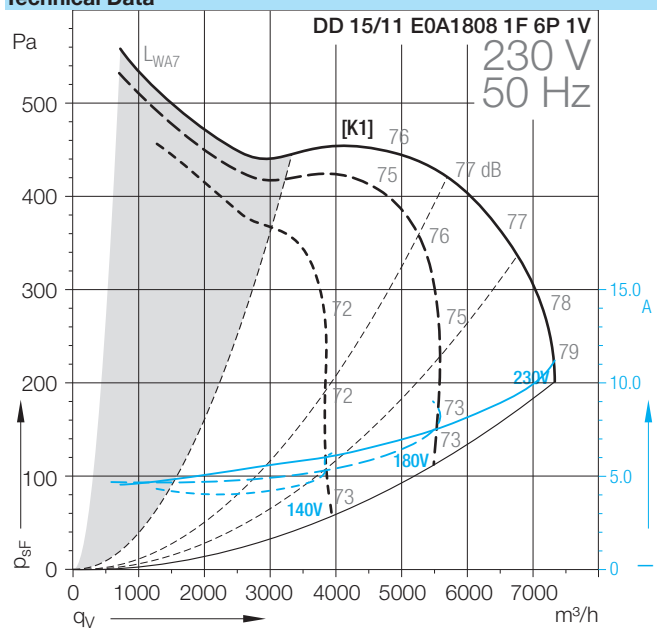


DD-15/11**Technical Data**

**Оформить
Заказ**

DD-15/11**Technical Data**

	Speed control	Curves	Nominal motor power W	Poles –	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
DD 15/11										
E0A1808 1F 6P 1V	(2)	[K1]	1350	6	1~		50	2525	10.8	900
M9N2 3F 6P 1V	(2)	[K3]	2200	6	3~	Δ/Y	50	3621	6.5	900

Technical Data

	Operating Capacitor μF	Nominal capacitor voltage V	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max. °C	Fan weight kg	Density of media kg/m³	Installation type (ISO 5801)	Article number
DD 15/11										
E0A1808 1F 6P 1V	35	450	IP20	F	EXT	40	25	1.2	B	6109HC
M9N2 3F 6P 1V			IP20	F	EXT	40	25	1.2	B	6109GX

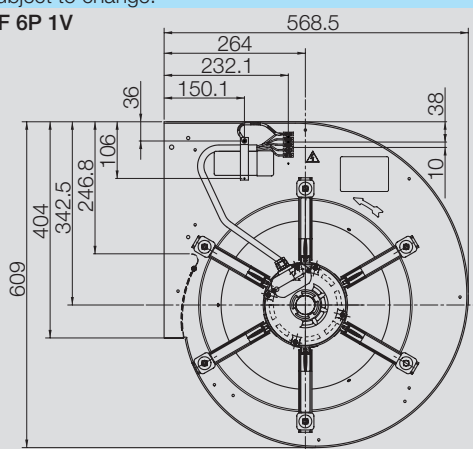
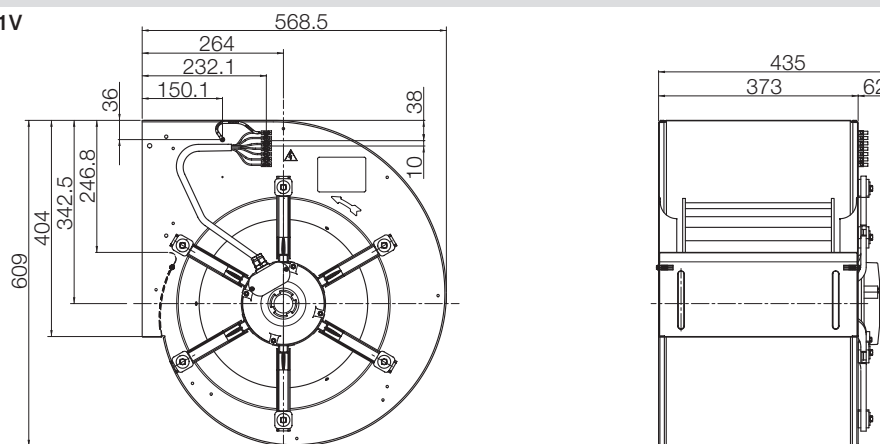
(1) = Speed controllable via Transformer

(2) = Speed controllable via TRIAC or Transformer

(3) = Speed controllable via Inverter

* = No speed control available

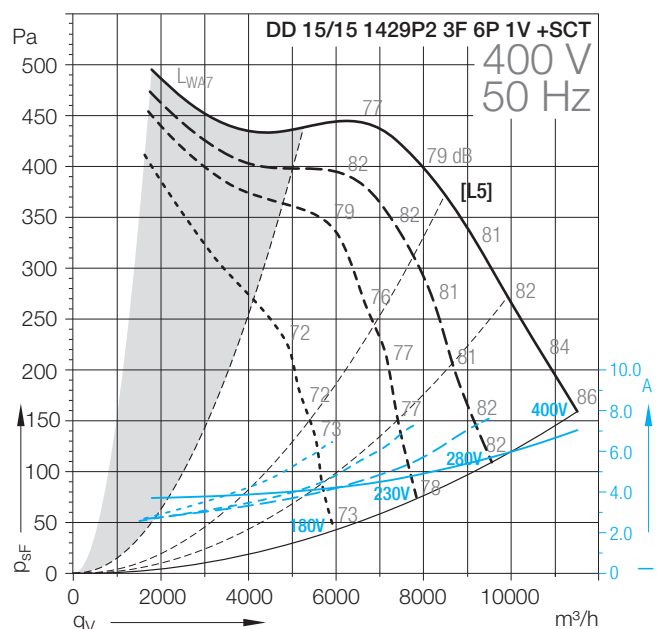
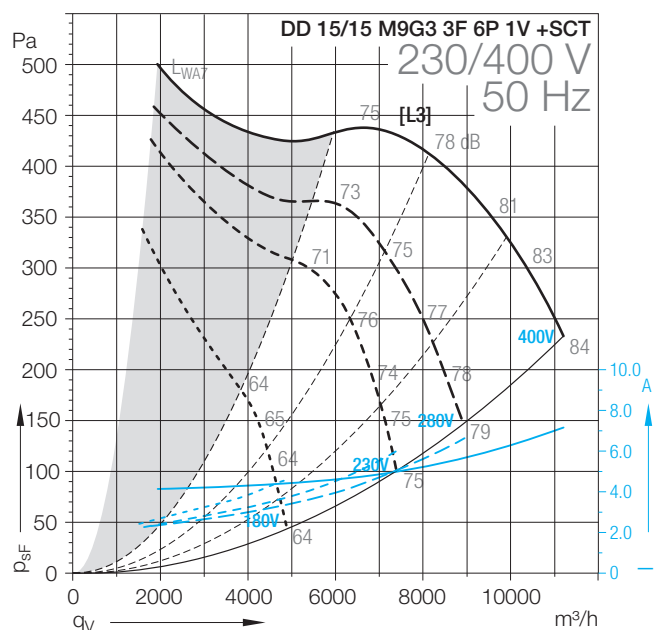
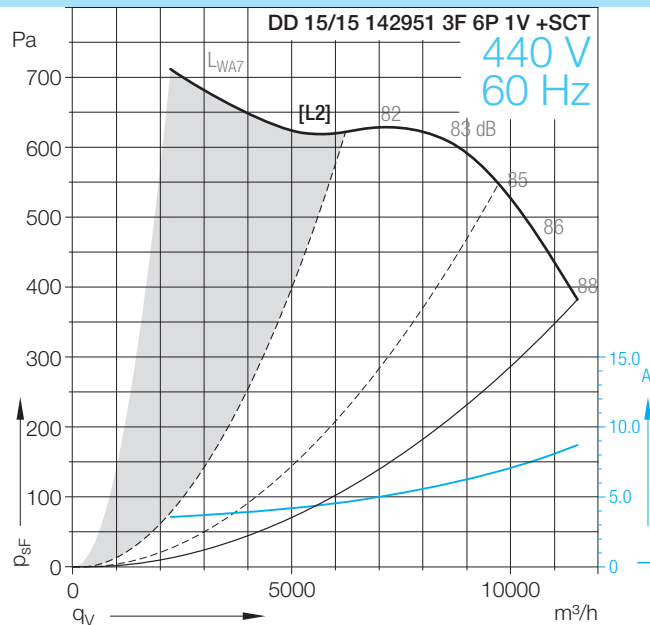
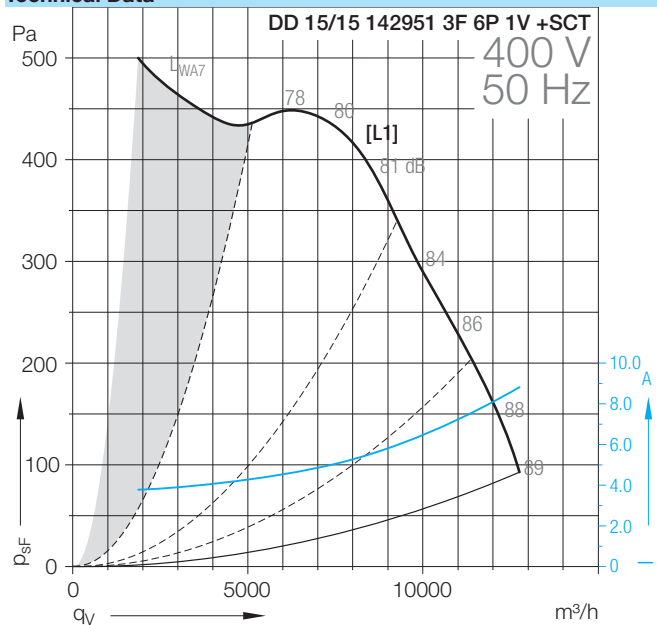
[HI] High speed, [ME] Medium speed, [LO] Low speed

Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7} , see „Technical Description“.**Dimensions** in mm, subject to change.**DD 15/11 E0A1808 1F 6P 1V****DD 15/11 M9N2 3F 6P 1V****Оформить
Заказ**

Ventilatorry.ru | zakaz@ventilatorry.ru | 8 (495) 133-95-09

DD-15/15

Technical Data



Оформить
Заказ

Ventilatorry.ru | zakaz@ventilatorry.ru | 8 (495) 133-95-09

DD-15/15**Technical Data**

	Speed control	Curves	Nominal motor power W	Poles —	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
DD 15/15										
142951 3F 6P 1V +SCT	*	[L1/L2]	2200	6	3~	Y	50/60	4594	8.5	960
M9G3 3F 6P 1V +SCT	(1)	[L3]	2200	6	3~	Δ/Y	50	3877	7	900
1429P2 3F 6P 1V +SCT	(2)	[L5]	2200	6	3~	Y	50	4140	6.8	910

Technical Data

	Operating Capacitor	Nominal capacitor voltage	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max. °C	Fan weight kg	Density of media kg/m³	Installation type (ISO 5801)	Article number
DD 15/15										
142951 3F 6P 1V +SCT			IP55	F	NO	40	60	1.2	B	6109C8
M9G3 3F 6P 1V +SCT			IP20	F	NO	40	36	1.2	B	6109W2
1429P2 3F 6P 1V +SCT			IP55	F	EXT	40	51	1.2	B	6109GX

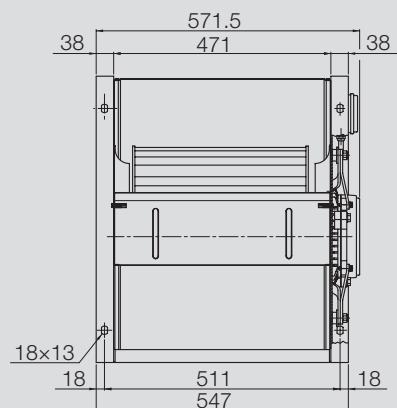
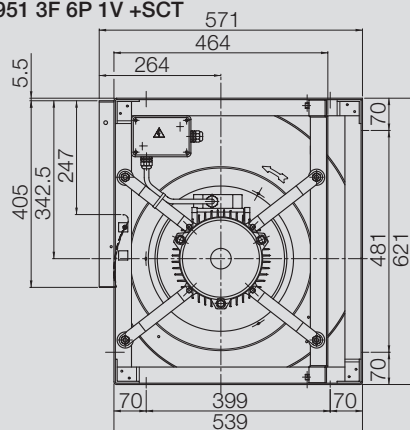
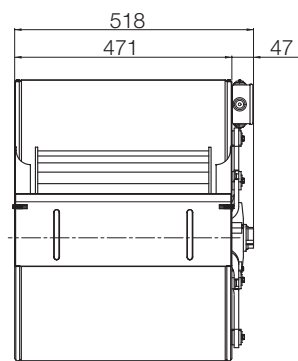
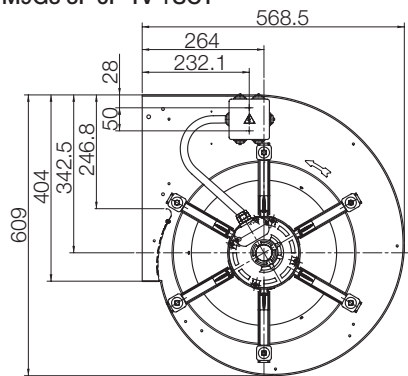
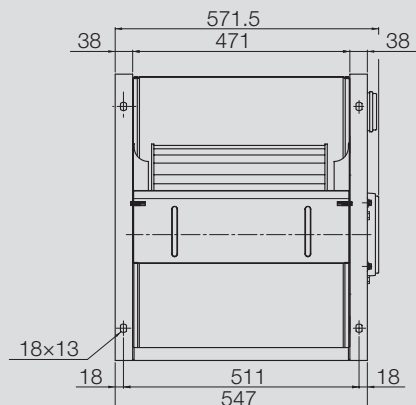
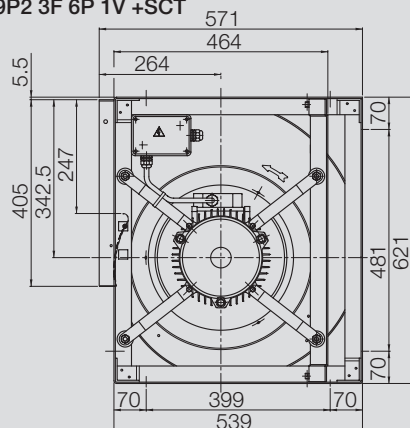
(1) = Speed controllable via Transformer

(2) = Speed controllable via TRIAC or Transformer

(3) = Speed controllable via Inverter

* = No speed control available

[HI] High speed, [ME] Medium speed, [LO] Low speed

Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7} , see „Technical Description“.**Dimensions** in mm, subject to change.**DD 15/15 142951 3F 6P 1V +SCT****DD 15/15 M9G3 3F 6P 1V +SCT****DD 15/15 1429P2 3F 6P 1V +SCT****Оформить
Заказ**