
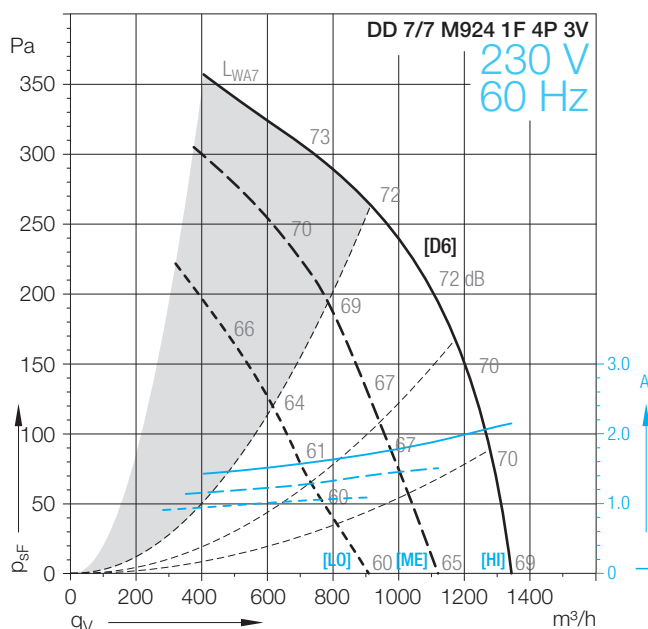
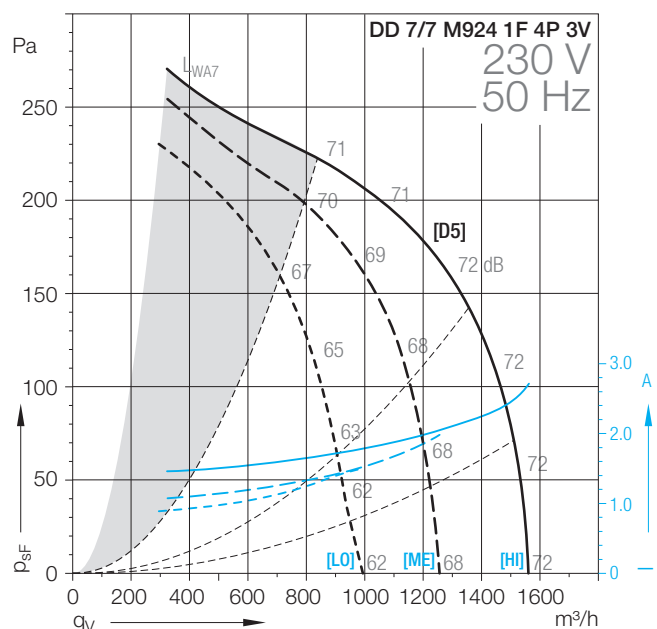
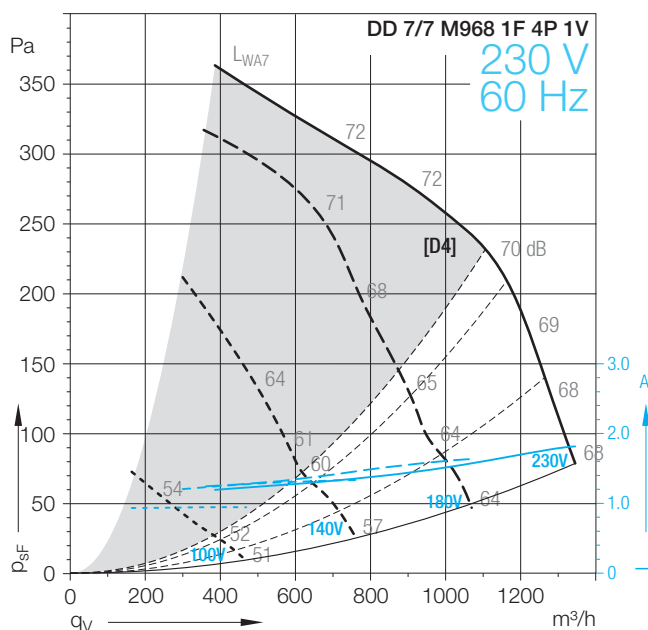
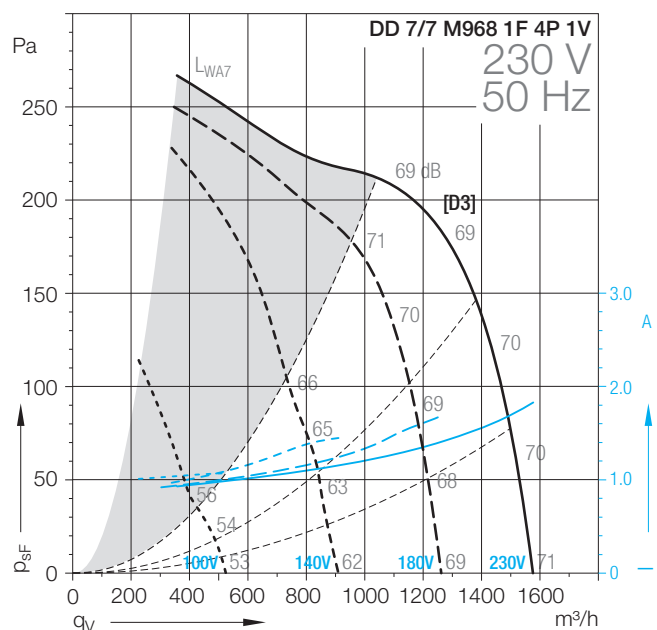
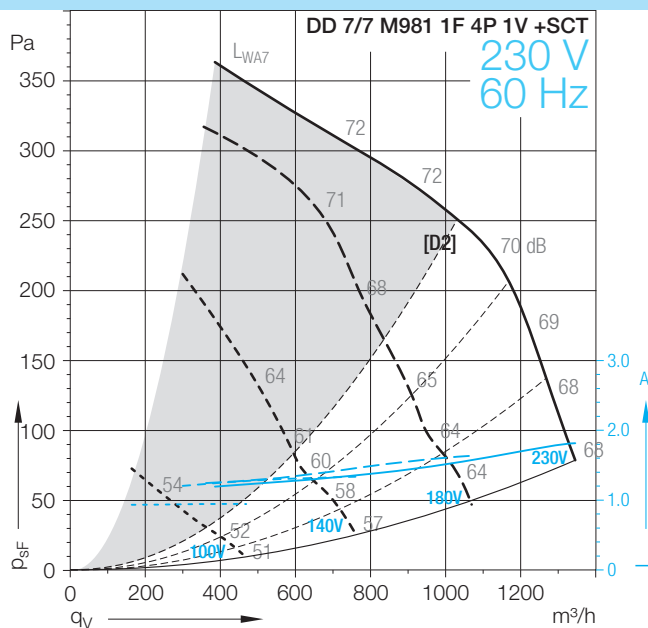


DD-7/7

Technical Data

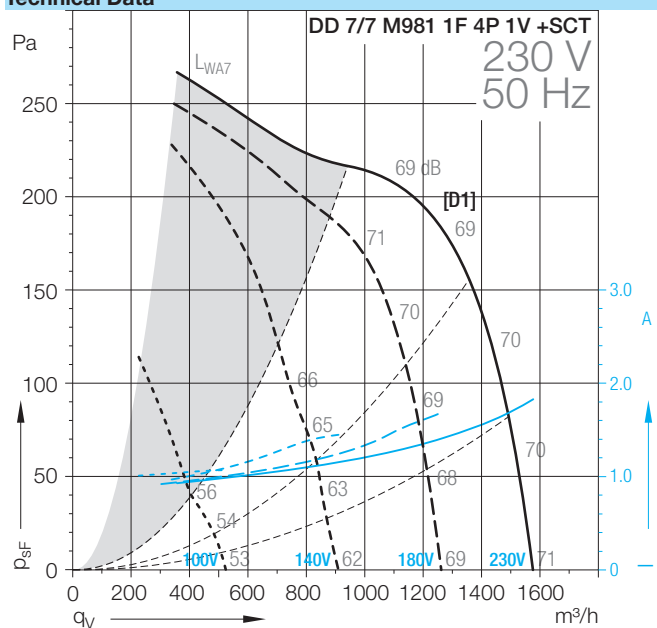

Оформить
Заказ

Ventilatorry.ru | zakaz@ventilatorry.ru | 8 (495) 133-95-09

DD-7/7

Technical Data

	Speed control	Curves	Nominal motor power W	Poles —	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
DD 7/7										
M981 1F 4P 1V +SCT	(2)	[D1/D2]	147	4	1~		50/60	415	1.7	1290
M968 1F 4P 1V	(2)	[D3/D4]	147	4	1~		50/60	422	1.7	1300
M924 1F 4P 3V	*	[D5/D6]	147	4	1~		50/60	456	2	1250

Technical Data

	Operating Capacitor μF	Nominal capacitor voltage V	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max. °C	Fan weight kg	Density of media kg/m³	Installation type (ISO 5801)	Article number
DD 7/7										
M981 1F 4P 1V +SCT	6.3	450	IP32	F	INT	40	9	1.2	B	6109HE
M968 1F 4P 1V	6.3	450	IP20	F	INT	40	6	1.2	B	6106E7
M924 1F 4P 3V	5	450	IP20	B	INT	50	7	1.2	B	6M0678

(1) = Speed controllable via Transformer

(2) = Speed controllable via TRIAC or Transformer

(3) = Speed controllable via Inverter



* = No speed control available

[H] High speed, [ME] Medium speed, [LO] Low speed



Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7} , see „Technical Description“.

Dimensions in mm, subject to change.



DD 7/7 M981 1F 4P 1V +SCT

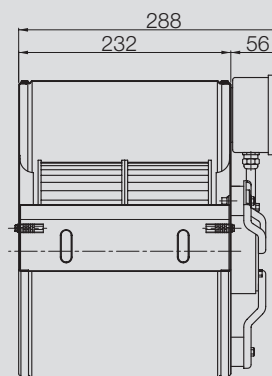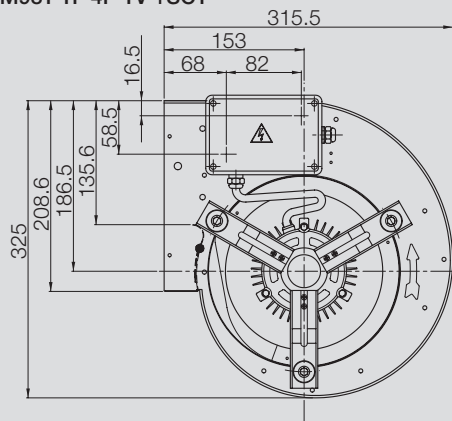

DD 7/7 M968 1F 4P 1V





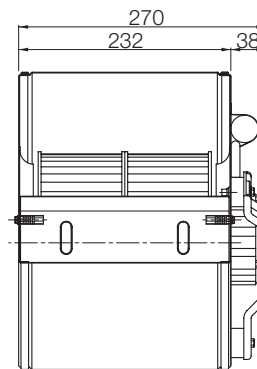
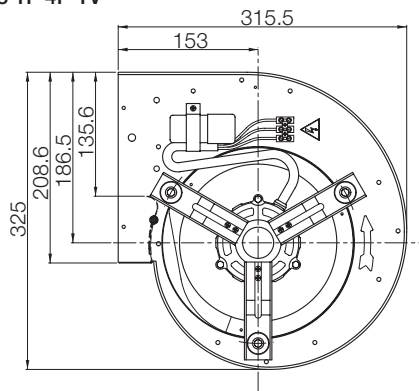


DD 7/7 M924 1F 4P 3V

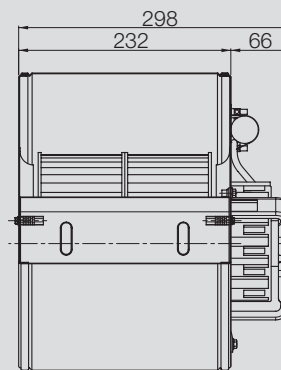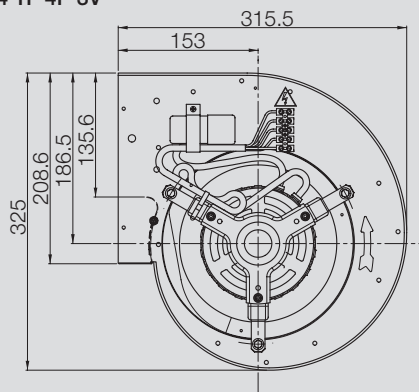Оформить
Заказ

DD-7/7

Technical Data

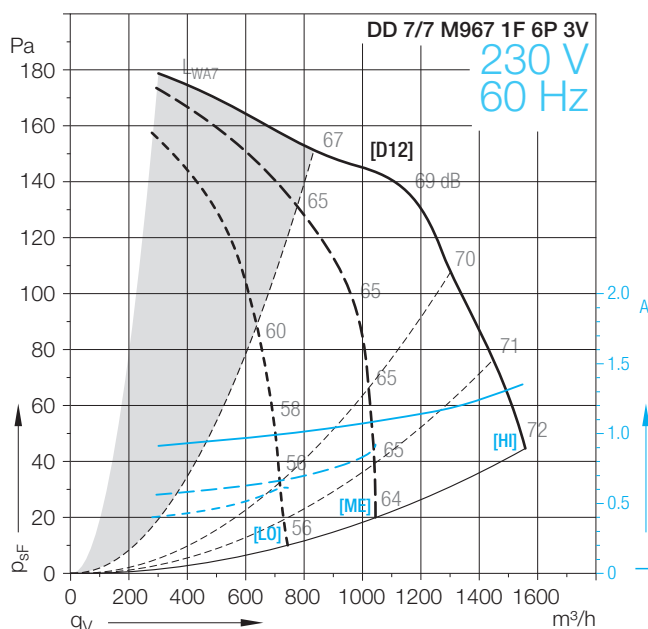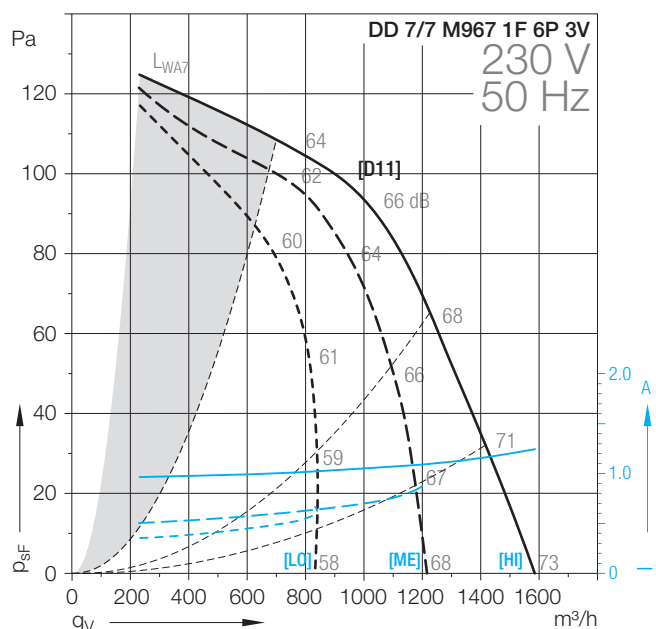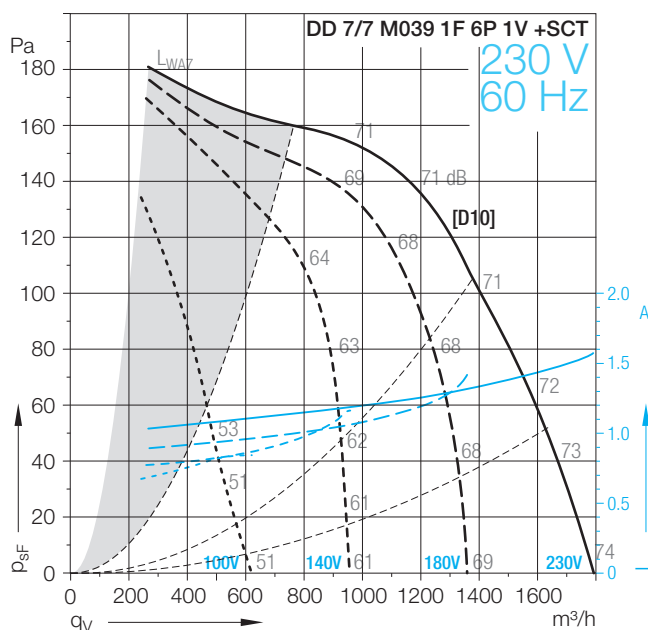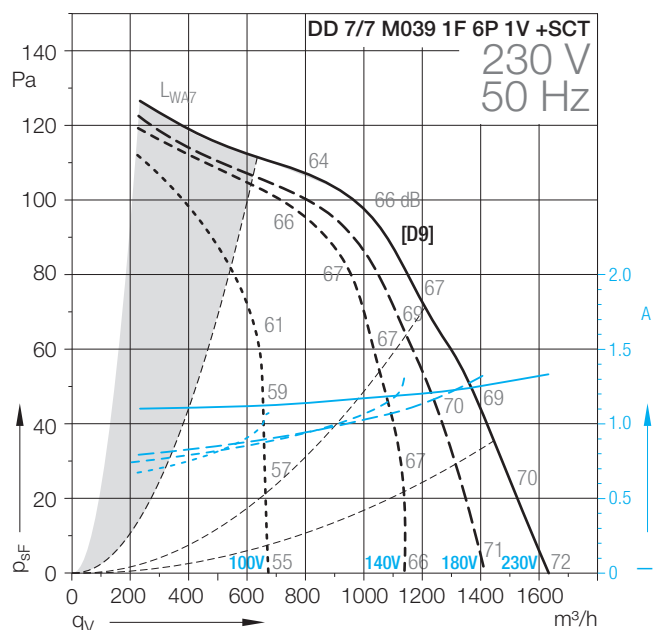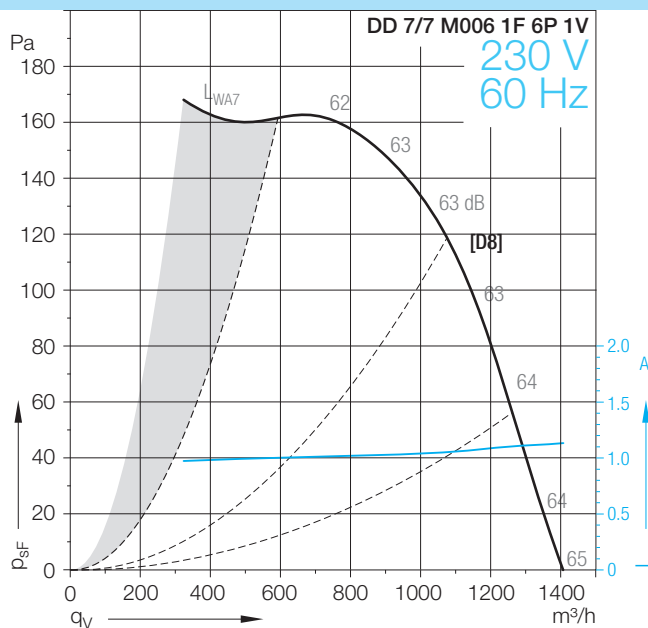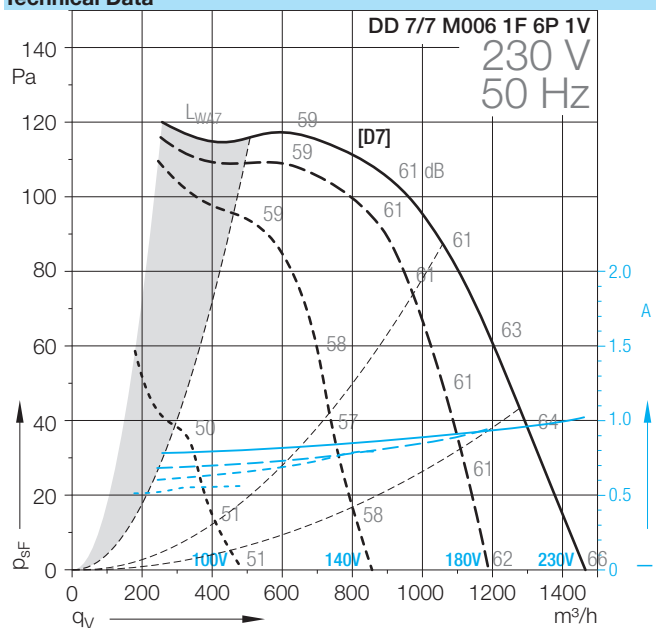

Оформить
Заказ

DD-7/7

Technical Data

	Speed control	Curves	Nominal motor power W	Poles –	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
DD 7/7										
M006 1F 6P 1V	(2)	[D7/D8]	62	6	1~		50/60	226	1	900
M039 1F 6P 1V +SCT	(2)	[D9/D10]	147	6	1~		50/60	282	1.3	860
M967 1F 6P 3V	*	[D11/D12]	147	6	1~		50/60	271	1.2	860

Technical Data

	Operating Capacitor μF	Nominal capacitor voltage V	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max. °C	Fan weight kg	Density of media kg/m³	Installation type (ISO 5801)	Article number
DD 7/7										
M006 1F 6P 1V	4	450	IP20	B	INT	50	7	1.2	B	610303
M039 1F 6P 1V +SCT	5	500	IP44	B	INT	40	7	1.2	B	6109CG
M967 1F 6P 3V	5	500	IP32	B	INT	40	7	1.2	B	6106Z6

(1) = Speed controllable via Transformer

(2) = Speed controllable via TRIAC or Transformer

(3) = Speed controllable via Inverter


* = No speed control available

[H] High speed, [ME] Medium speed, [LO] Low speed


Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7} , see „Technical Description“.

Dimensions in mm, subject to change.


DD 7/7 M006 1F 6P 1V

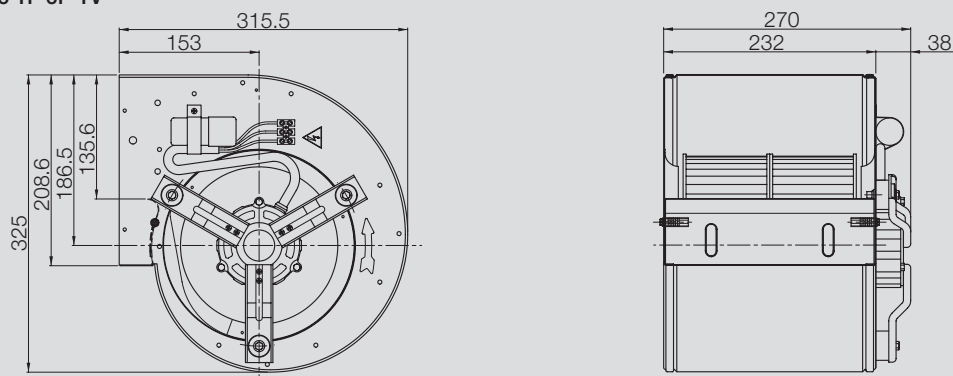

DD 7/7 M039 1F 6P 1V +SCT

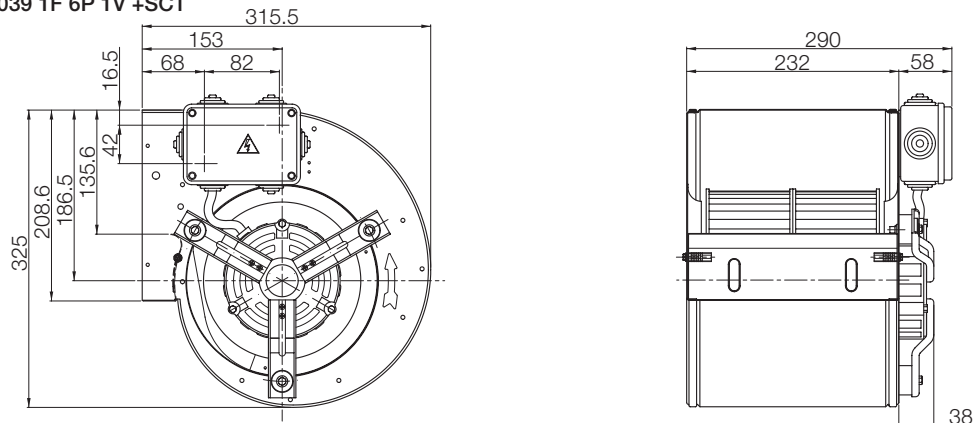

DD 7/7 M967 1F 6P 3V

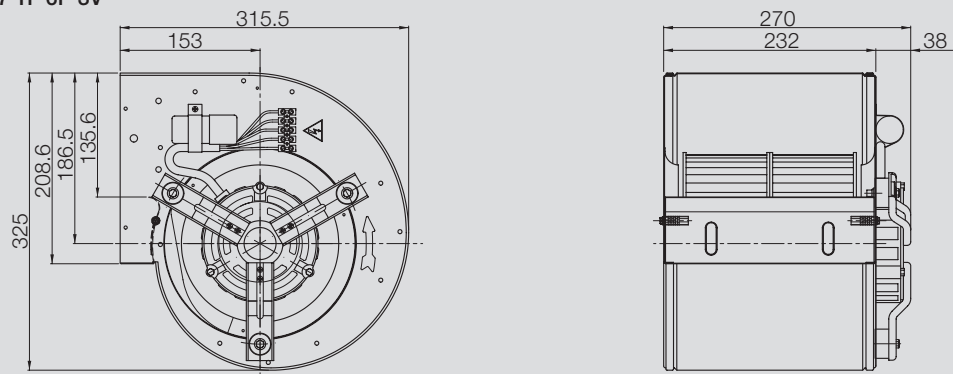Оформить
Заказ