

DDM 10/8**E6G3704 1F 4P 1V +SCT****Technical Data**

	Speed control	Curves	Nominal motor power W	Poles —	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
DDM 10/8 E6G3704										
1F 4P 1V +SCT	(2)	[M1]	600	4	1~		50	1510	6.4	1380

Technical Data

	Operating Capacitor μF	Nominal capacitor voltage V	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max. °C	Fan weight kg	Density of media kg/m³	Installation type (ISO 5801)	Article number
DDM 10/8 E6G3704										
1F 4P 1V +SCT	25	450	IP55	F	EXT	40	23	1.2	B	610220

(1) = Speed controllable via Transformer

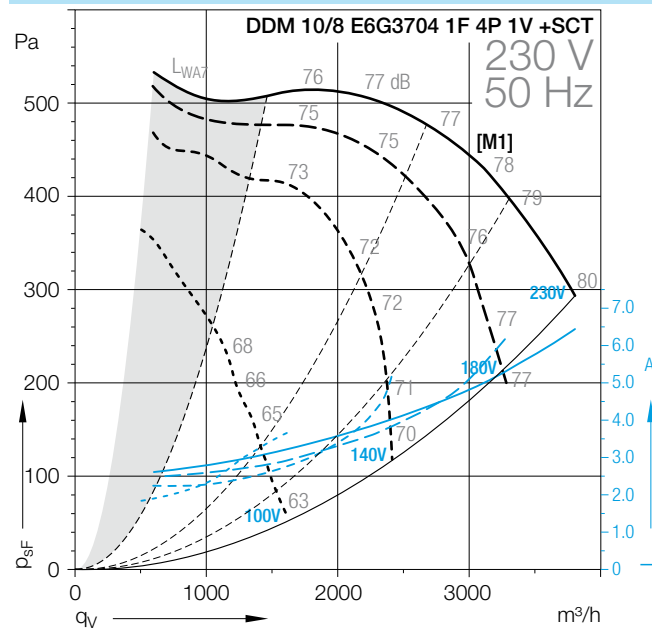
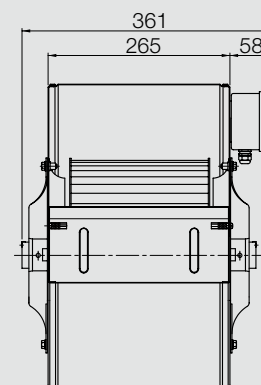
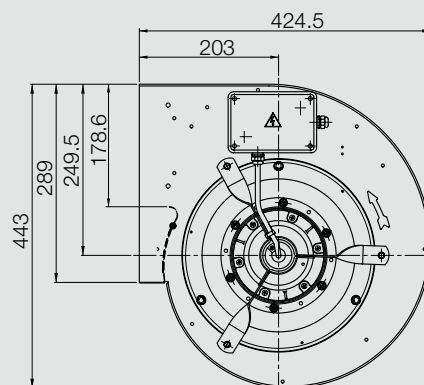
(2) = Speed controllable via TRIAC or Transformer

(3) = Speed controllable via Inverter

* = No speed control available

[H] High speed, [ME] Medium speed, [LO] Low speed

Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7} , see „Technical Description“.

Curves**Dimensions** in mm, Subject to change.**DDM 10/8 E6G3704 1F 4P 1V +SCT**
**Оформить
Заказ**

 Ventilatorry.ru | zakaz@ventilatorry.ru | 8 (495) 133-95-09

DDM 10/8 E6G3604 1F 4P 1V +SCT

Technical Data

DDM 10/8 E6G3604	Speed control	Curves	Nominal motor power W	Poles	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
1F 4P 1V +SCT	(2)	[M3]	550	4	1~		50	1061	4.6	1220

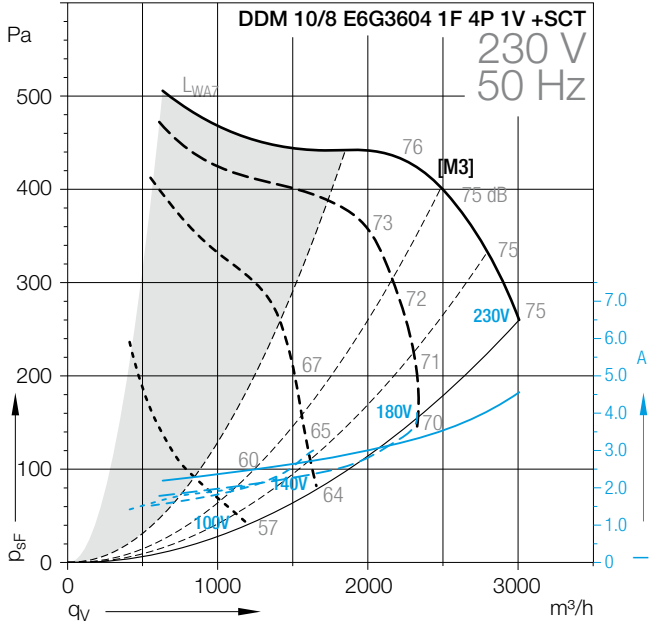
Technical Data

DDM 10/8 E6G3604	Operating Capacitor μF	Nominal capacitor voltage V	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max. $^{\circ}C$	Fan weight kg	Density of media kg/m^3	Installation type (ISO 5801)	Article number
1F 4P 1V +SCT	16	450	IP55	F	EXT	40	20	1.2	B	6M02X4

(1) = Speed controllable via Transformer
(2) = Speed controllable via TRIAC or Transformer
(3) = Speed controllable via Inverter
* = No speed control available
[H] High speed, [M] Medium speed, [L] Low speed

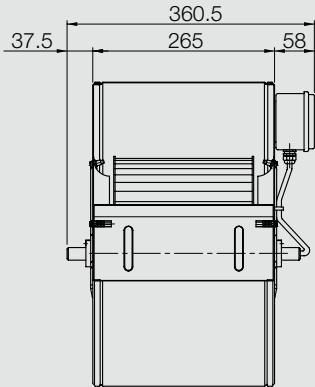
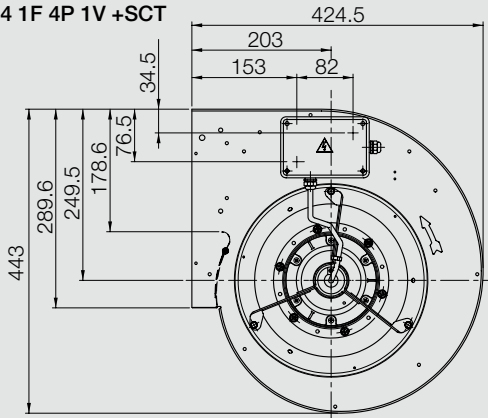
Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7} , see „Technical Description“.

Curves



Dimensions in mm, Subject to change.

DDM 10/8 E6G3604 1F 4P 1V +SCT



Оформить
Заказ

DDM 10/8**E6G2503 1F 4P 1V****Technical Data**

	Speed control	Curves	Nominal motor power W	Poles —	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
DDM 10/8 E6G2503										
1F 4P 1V	(2)	[M5]	550	4	1~		50	1645	6.7	1400

Technical Data

	Operating Capacitor μF	Nominal capacitor voltage V	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max. °C	Fan weight kg	Density of media kg/m³	Installation type (ISO 5801)	Article number
DDM 10/8 E6G2503										
1F 4P 1V	20	450	IP10	F	EXT	40	18	1.2	B	6M025N

(1) = Speed controllable via Transformer

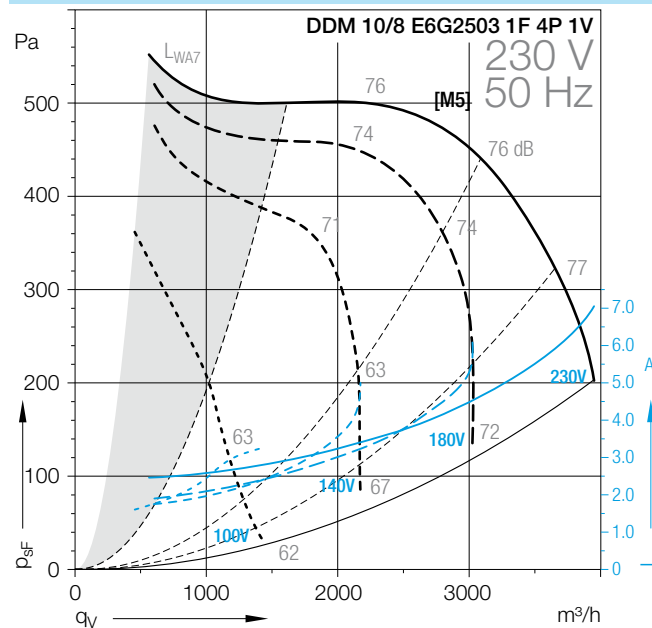
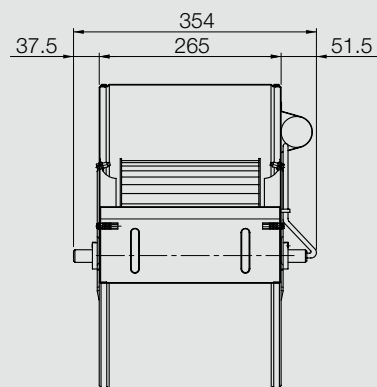
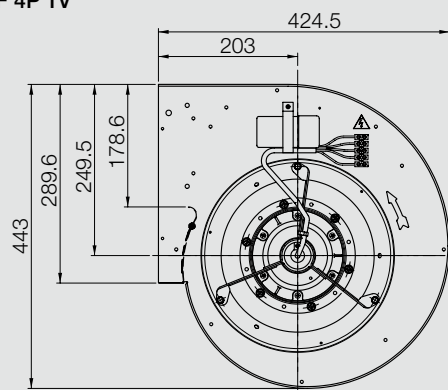
(2) = Speed controllable via TRIAC or Transformer

(3) = Speed controllable via Inverter

* = No speed control available

[H] High speed, [M] Medium speed, [L] Low speed

Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7} , see „Technical Description“.

Curves**Dimensions** in mm, Subject to change.**DDM 10/8 E6G2503 1F 4P 1V**
**Оформить
Заказ**

 Ventilatorry.ru | zakaz@ventilatorry.ru | 8 (495) 133-95-09

DDM 10/8 E6G2701 1F 4P 3V

Technical Data

	Speed control	Curves	Nominal motor power W	Poles	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
DDM 10/8 E6G2701										
1F 4P 3V	*	[M7]	550	4	1~		50	1422	5.9	1380

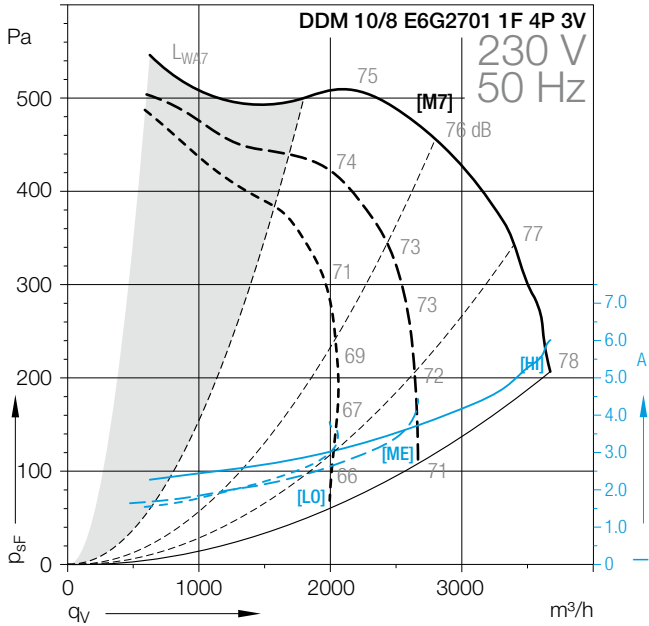
Technical Data

	Operating Capacitor μ F	Nominal capacitor voltage V	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max. $^{\circ}$ C	Fan weight kg	Density of media kg/m ³	Installation type (ISO 5801)	Article number
DDM 10/8 E6G2701										
1F 4P 3V	25	450	IP10	F	EXT	40	18	1.2	B	61025P

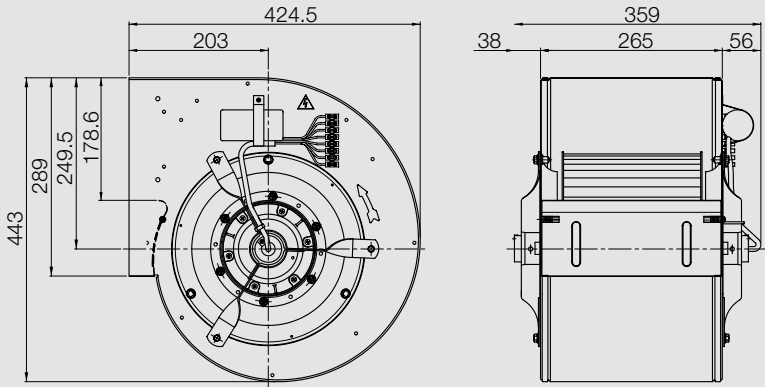
(1) = Speed controllable via Transformer
(2) = Speed controllable via TRIAC or Transformer
(3) = Speed controllable via Inverter
* = No speed control available
[H] High speed, [ME] Medium speed, [LO] Low speed

Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7} , see „Technical Description“.

Curves



Dimensions in mm, Subject to change.
DDM 10/8 E6G2701 1F 4P 3V



DDM 10/8**E6G3603 3F 4P 1V +SCT****Technical Data**

	Speed control	Curves	Nominal motor power W	Poles —	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
DDM 10/8 E6G3603										
3F 4P 1V +SCT	*	[M9]	550	4	3~	Δ/Y	50	1376	2.5	1410

Technical Data

	Operating Capacitor μF	Nominal capacitor voltage V	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max. °C	Fan weight kg	Density of media kg/m³	Installation type (ISO 5801)	Article number
DDM 10/8 E6G3603										
3F 4P 1V +SCT			IP55	F	EXT	40	24	1.2	B	6M02XA

(1) = Speed controllable via Transformer

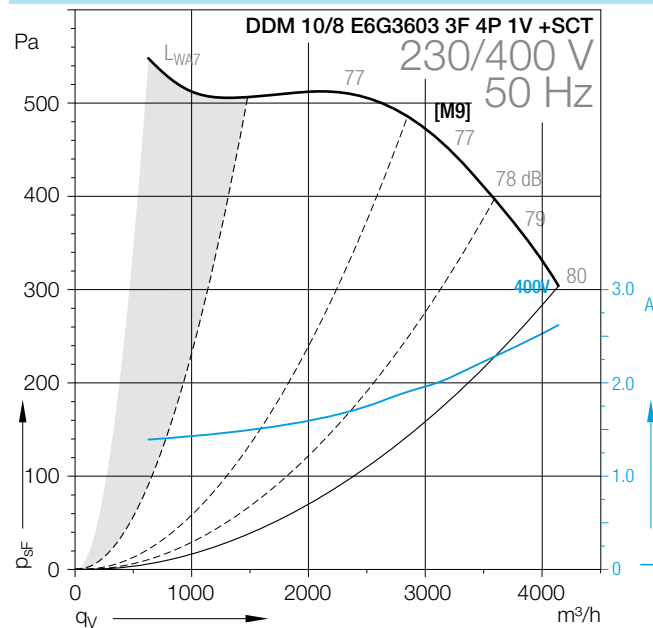
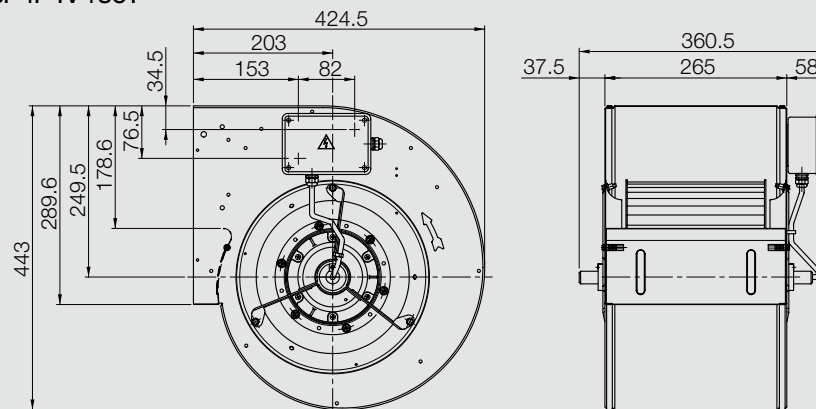
(2) = Speed controllable via TRIAC or Transformer

(3) = Speed controllable via Inverter

* = No speed control available

[H] High speed, [ME] Medium speed, [L] Low speed

Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7} , see „Technical Description“.

Curves**Dimensions** in mm, Subject to change.**DDM 10/8 E6G3603 3F 4P 1V +SCT**
**Оформить
Заказ**

 Ventilatorry.ru | zakaz@ventilatorry.ru | 8 (495) 133-95-09

DDM 10/8**E6G3602 1F 6P 1V +SCT****Technical Data**

	Speed control	Curves	Nominal motor power W	Poles —	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
DDM 10/8 E6G3602										
1F 6P 1V +SCT	(2)	[M11/M12]	515	6	1~		50/60	860	3.6	800

Technical Data

	Operating Capacitor μF	Nominal capacitor voltage V	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max. $^{\circ}\text{C}$	Fan weight kg	Density of media kg/m^3	Installation type (ISO 5801)	Article number
DDM 10/8 E6G3602										
1F 6P 1V +SCT	25	450	IP55	F	EXT	70	14	1.2	B	6M02N9

(1) = Speed controllable via Transformer

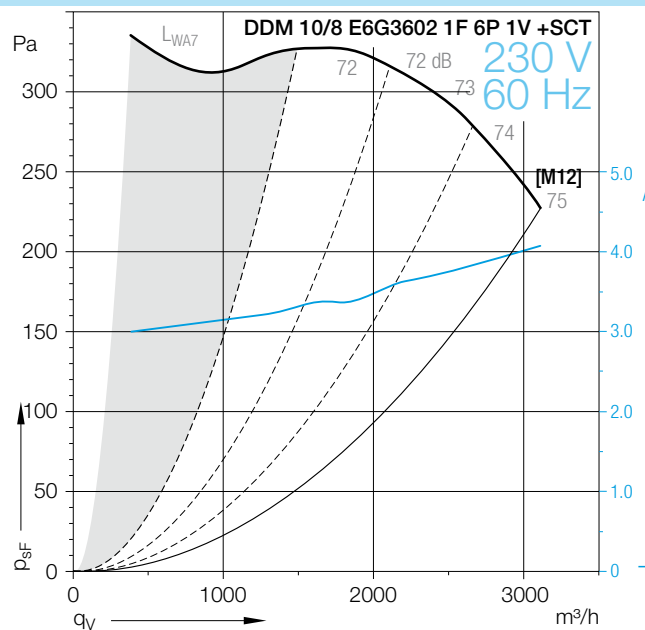
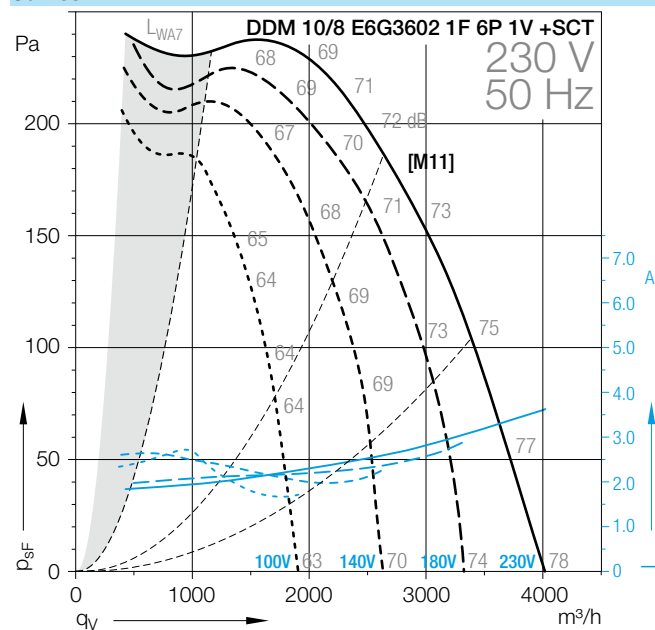
(2) = Speed controllable via TRIAC or Transformer

(3) = Speed controllable via Inverter

* = No speed control available

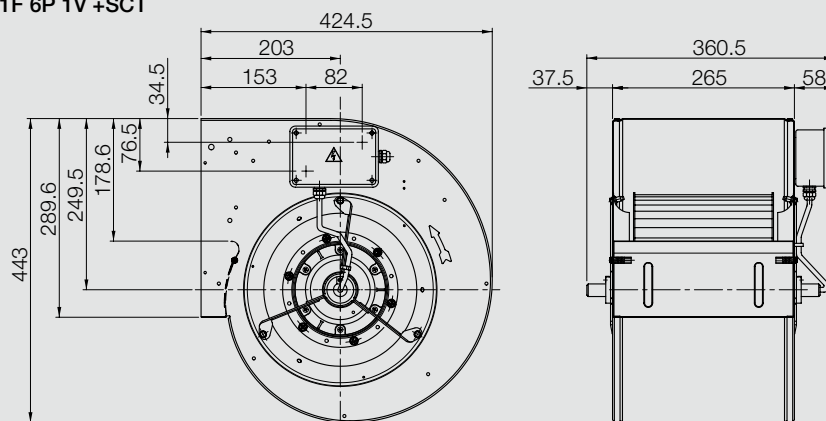
[H] High speed, [M] Medium speed, [L] Low speed

Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7} , see „Technical Description“.

Curves

Dimensions in mm, Subject to change.

DDM 10/8 E6G3602 1F 6P 1V +SCT

Оформить
Заказ

DDM 10/8**E6G3402 1F 6P 1V +SCT****Technical Data**

	Speed control	Curves	Nominal motor power W	Poles -	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
DDM 10/8 E6G3402										
1F 6P 1V +SCT	(2)	[M13]	250	6	1~		50	533	2.3	800

Technical Data

	Operating Capacitor μF	Nominal capacitor voltage V	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max. °C	Fan weight kg	Density of media kg/m³	Installation type (ISO 5801)	Article number
DDM 10/8 E6G3402										
1F 6P 1V +SCT	12.5	450	IP55	F	EXT	40	17	1.2	B	6M02WZ

(1) = Speed controllable via Transformer

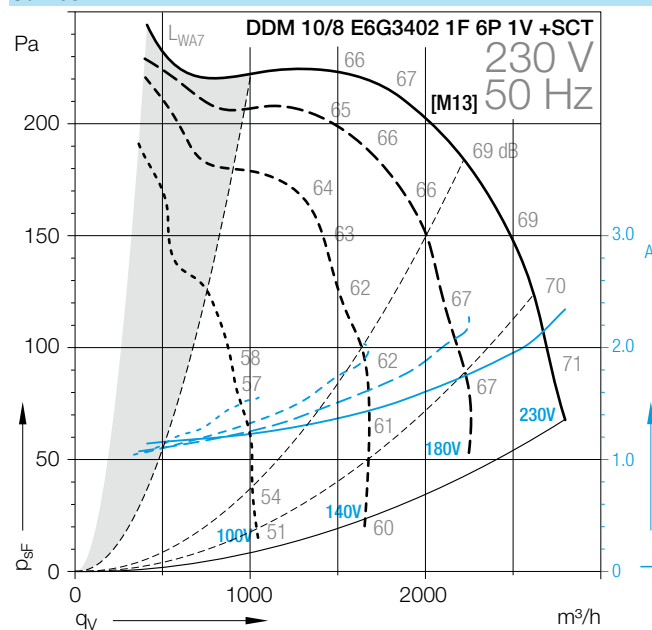
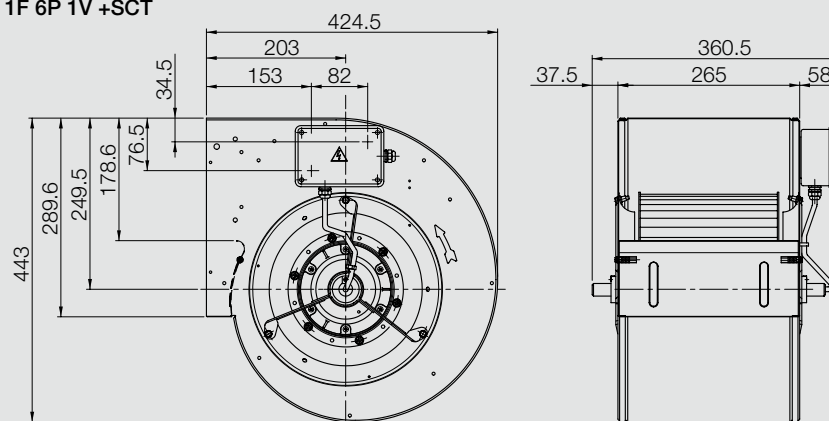
(2) = Speed controllable via TRIAC or Transformer

(3) = Speed controllable via Inverter

* = No speed control available

[H] High speed, [ME] Medium speed, [L] Low speed

Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7} , see „Technical Description“.

Curves**Dimensions** in mm, Subject to change.**DDM 10/8 E6G3402 1F 6P 1V +SCT**

**Оформить
Заказ**

DDM 10/8 E6G2601 1F 6P 3V

Technical Data

	Speed control	Curves	Nominal motor power W	Poles	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
DDM 10/8 E6G2601										
1F 6P 3V	*	[M15]	420	6	1~		50	926	4.3	890

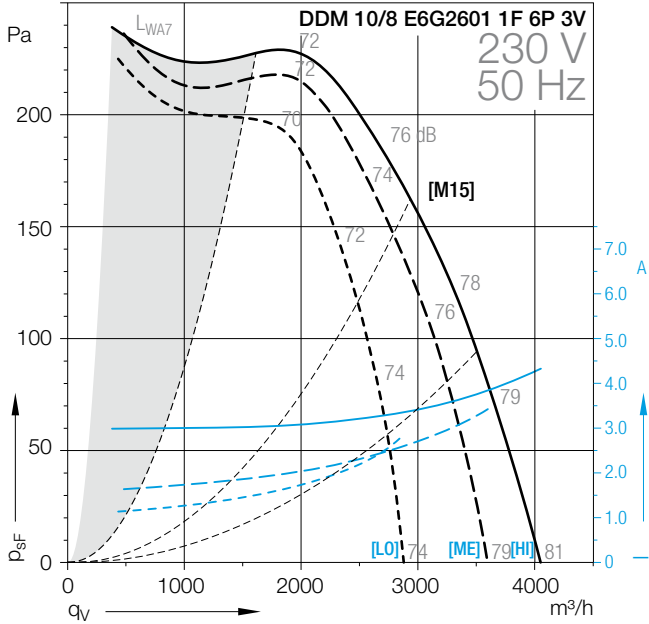
Technical Data

	Operating Capacitor µF	Nominal capacitor voltage V	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max. °C	Fan weight kg	Density of media kg/m³	Installation type (ISO 5801)	Article number
DDM 10/8 E6G2601										
1F 6P 3V	20	450	IP10	F	EXT	70	24	1.2	B	6M02LP

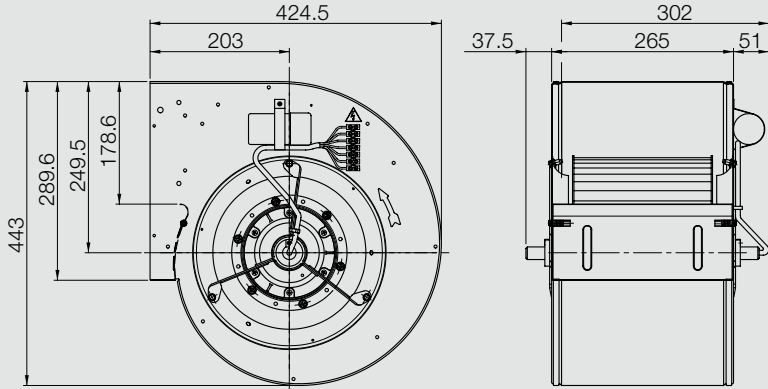
(1) = Speed controllable via Transformer
(2) = Speed controllable via TRIAC or Transformer
(3) = Speed controllable via Inverter
* = No speed control available
[H] High speed, [M] Medium speed, [L] Low speed

Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7}, see „Technical Description“.

Curves



Dimensions in mm, Subject to change.
DDM 10/8 E6G2601 1F 6P 3V



DDM 10/8**E6G3404 1F 6P 3V +SCT****Technical Data**

	Speed control	Curves	Nominal motor power W	Poles -	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
DDM 10/8 E6G3404										
1F 6P 3V +SCT	*	[M17]	280	6	1~		50	656	2.9	865

Technical Data

	Operating Capacitor μF	Nominal capacitor voltage V	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max. °C	Fan weight kg	Density of media kg/m³	Installation type (ISO 5801)	Article number
DDM 10/8 E6G3404										
1F 6P 3V +SCT	12.5	450	IP55	F	EXT	40	15	1.2	B	6M024A

(1) = Speed controllable via Transformer

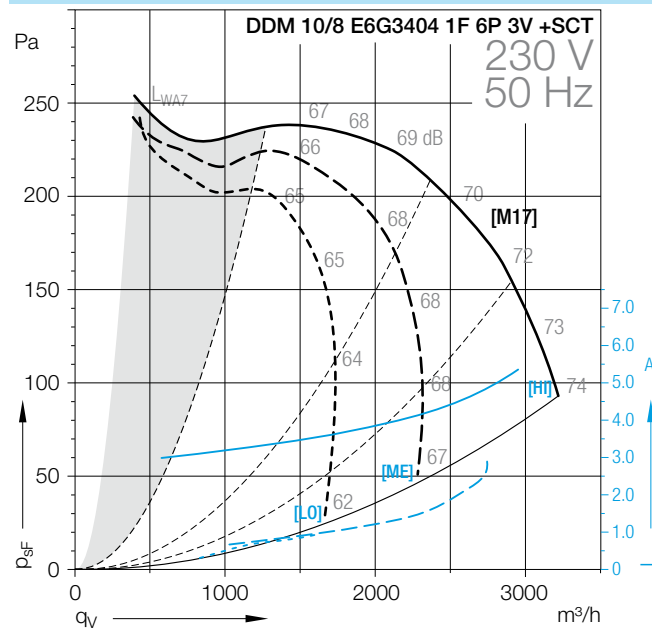
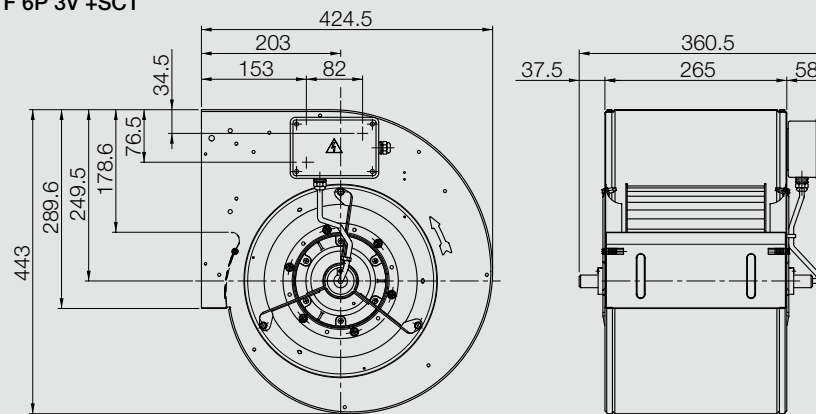
(2) = Speed controllable via TRIAC or Transformer

(3) = Speed controllable via Inverter

* = No speed control available

[H] High speed, [ME] Medium speed, [L] Low speed

Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7} , see „Technical Description“.

Curves**Dimensions** in mm, Subject to change.**DDM 10/8 E6G3404 1F 6P 3V +SCT**

**Оформить
Заказ**

Ventilatorry.ru | zakaz@ventilatorry.ru | 8 (495) 133-95-09

DDM 10/8 E6G3403 3F 6P 1V +SCT

Technical Data

	Speed control	Curves	Nominal motor power W	Poles	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
DDM 10/8 E6G3403										
3F 6P 1V +SCT	*	[M19/M20]	245	6	3~	Δ/Y	50/60	659	1.3	870

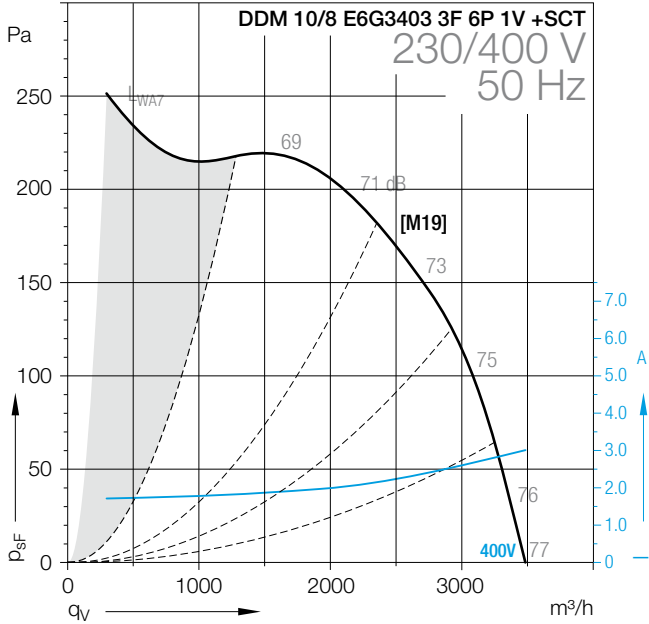
Technical Data

	Operating Capacitor μF	Nominal capacitor voltage V	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max. °C	Fan weight kg	Density of media kg/m³	Installation type (ISO 5801)	Article number
DDM 10/8 E6G3403										
3F 6P 1V +SCT			IP44	F	EXT	40	24	1.2	B	6M02XC

(1) = Speed controllable via Transformer
(2) = Speed controllable via TRIAC or Transformer
(3) = Speed controllable via Inverter
* = No speed control available
[HI] High speed, [ME] Medium speed, [LO] Low speed

Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7}, see „Technical Description“.

Curves



Dimensions in mm, Subject to change.
DDM 10/8 E6G3403 3F 6P 1V +SCT

