

DDM 133/190**7725A6 1F 2P 1V +FL****Technical Data**

	Speed control	Curves	Nominal motor power W	Poles —	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
DDM 133/190 7725A6										
1F 2P 1V +FL	(2)	[C1/C2]	90	2	1~		50/60	202	0.9	2350

Technical Data

	Operating Capacitor μF	Nominal capacitor voltage V	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max. $^{\circ}\text{C}$	Fan weight kg	Density of media kg/m^3	Installation type (ISO 5801)	Article number
DDM 133/190 7725A6										
1F 2P 1V +FL	4	450	IP54	F	INT	40	4	1.2	B	6102LT

(1) = Speed controllable via Transformer

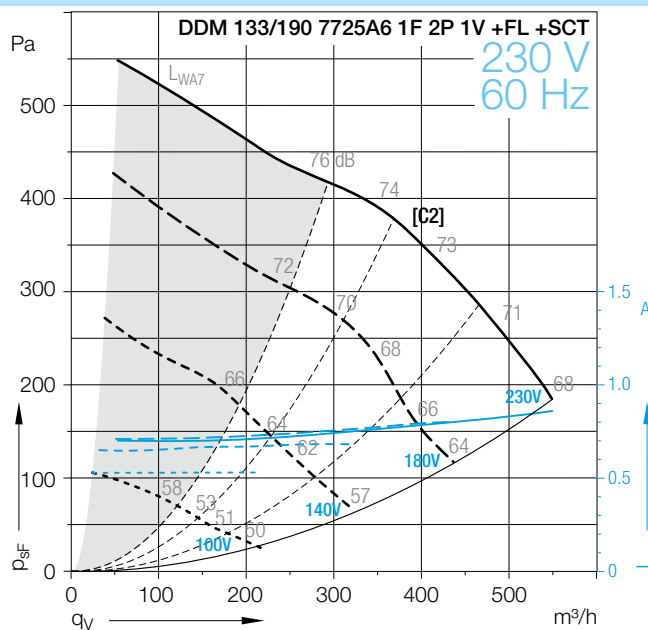
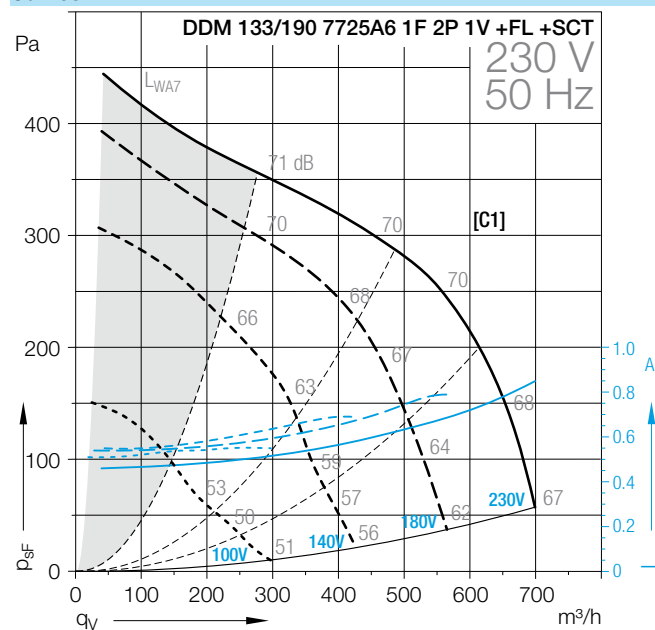
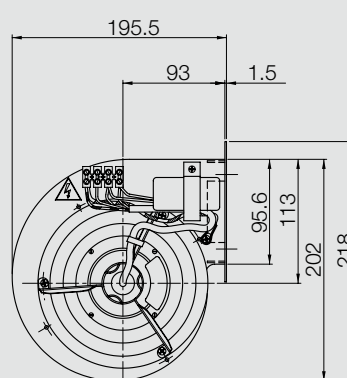
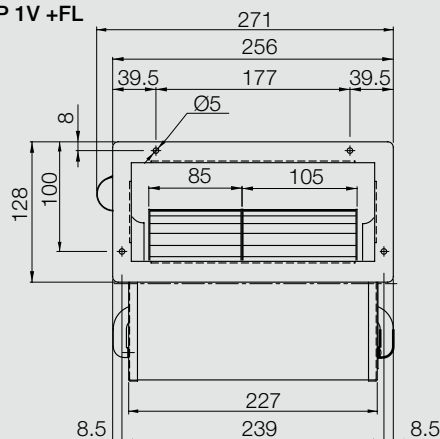
(2) = Speed controllable via TRIAC or Transformer

(3) = Speed controllable via Inverter

* = No speed control available

[HI] High speed, [ME] Medium speed, [LO] Low speed

Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7} , see „Technical Description“.

Curves**Dimensions** in mm, Subject to change.**DDM 133/190 7725A6 1F 2P 1V +FL**Оформить
Заказ

DDM 133/190**7725C0 1F 2P 1V +FL****Technical Data**

	Speed control	Curves	Nominal motor power W	Poles —	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
DDM 133/190 7725C0										
1F 2P 1V +FL	(2)	[C3/C4]	90	2	1~		50/60	226	1	2300

Technical Data

	Operating Capacitor μF	Nominal capacitor voltage V	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max. $^{\circ}\text{C}$	Fan weight kg	Density of media kg/m^3	Installation type (ISO 5801)	Article number
DDM 133/190 7725C0										
1F 2P 1V +FL	6.3	450	IP32	B	EXT	40	5	1.2	B	6102FW

(1) = Speed controllable via Transformer

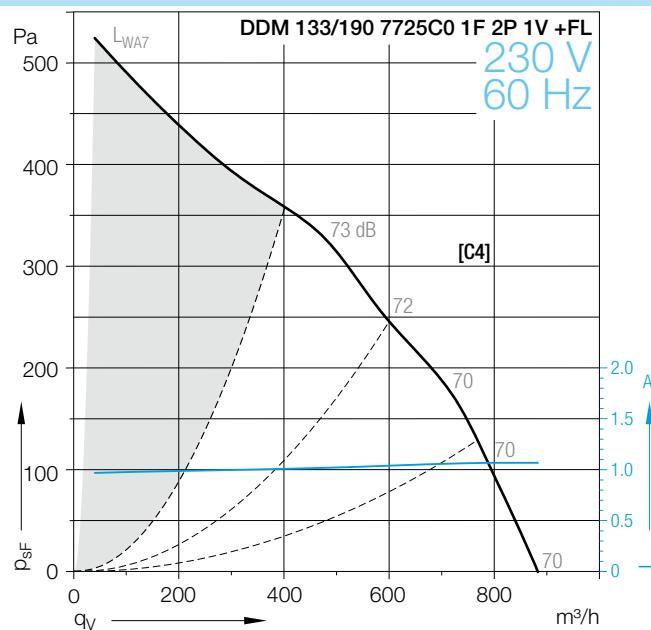
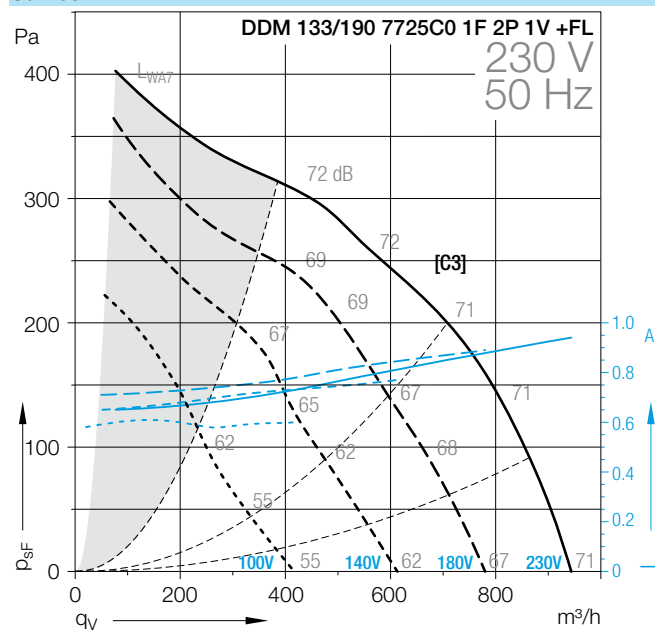
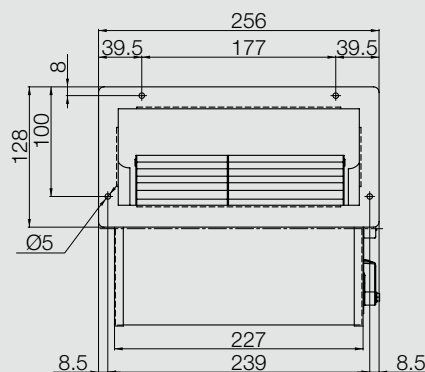
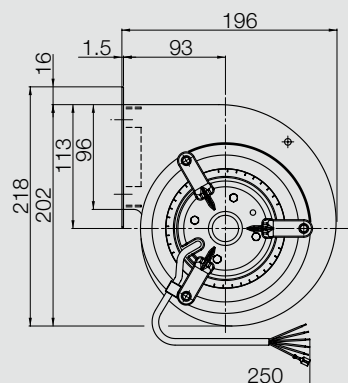
(2) = Speed controllable via TRIAC or Transformer

(3) = Speed controllable via Inverter

* = No speed control available

[H] High speed, [ME] Medium speed, [L] Low speed

Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7} , see „Technical Description“.

Curves**Dimensions** in mm, Subject to change.**DDM 133/190 7725C0 1F 2P 1V +FL****Оформить
Заказ**Ventilatorry.ru | zakaz@ventilatorry.ru | 8 (495) 133-95-09

DDM 133/190**7725C6 1F 2P 4V +FL****Technical Data**

	Speed control	Curves	Nominal motor power W	Poles —	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
DDM 133/190 7725C6										
1F 2P 4V +FL	*	[C5/C6]	60	2	1~		50/60	175	0.7	2500

Technical Data

	Operating Capacitor μF	Nominal capacitor voltage V	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max. $^{\circ}\text{C}$	Fan weight kg	Density of media kg/m^3	Installation type (ISO 5801)	Article number
DDM 133/190 7725C6										
1F 2P 4V +FL	4	450	IP32	B	EXT	40	5	1.2	B	6102YC

(1) = Speed controllable via Transformer

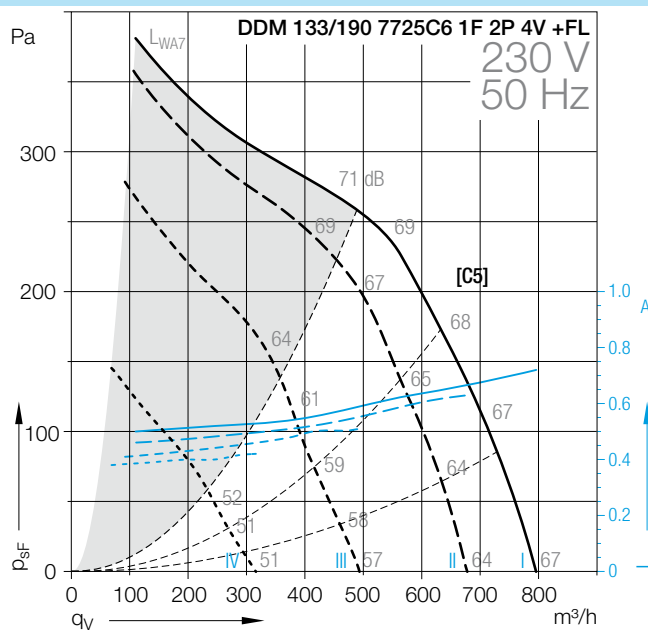
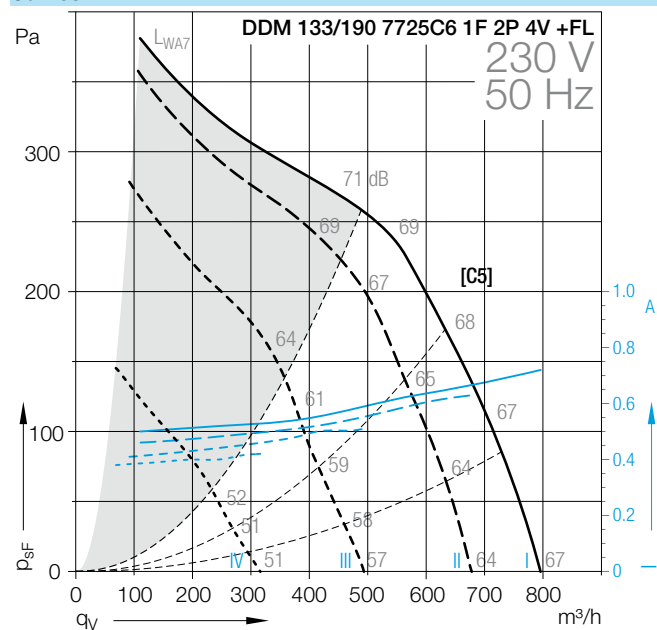

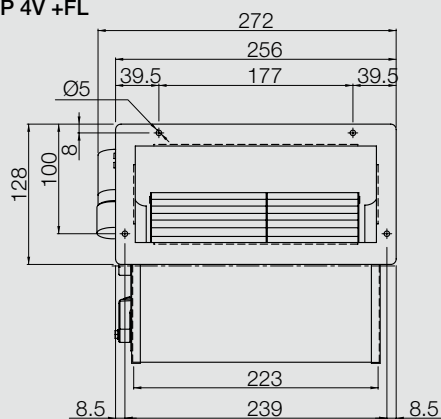
(2) = Speed controllable via TRIAC or Transformer

(3) = Speed controllable via Inverter

* = No speed control available

[HI] High speed, [ME] Medium speed, [LO] Low speed

Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7} , see „Technical Description“.

Curves**Dimensions** in mm, Subject to change.**DDM 133/190 7725C6 1F 2P 4V +FL****Оформить
Заказ**