

DDM 146/190**7725A8 1F 2P 1V +FL****Technical Data**

	Speed control	Curves	Nominal motor power W	Poles -	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
DDM 146/190 7725A8										
1F 2P 1V +FL	(2)	[D1]	110	2	1~		50	274	1.1	2400

Technical Data

	Operating Capacitor μF	Nominal capacitor voltage V	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max. °C	Fan weight kg	Density of media kg/m³	Installation type (ISO 5801)	Article number
DDM 146/190 7725A8										
1F 2P 1V +FL	5	450	IP54	F	INT	40	5	1.2	B	6102AZ

(1) = Speed controllable via Transformer

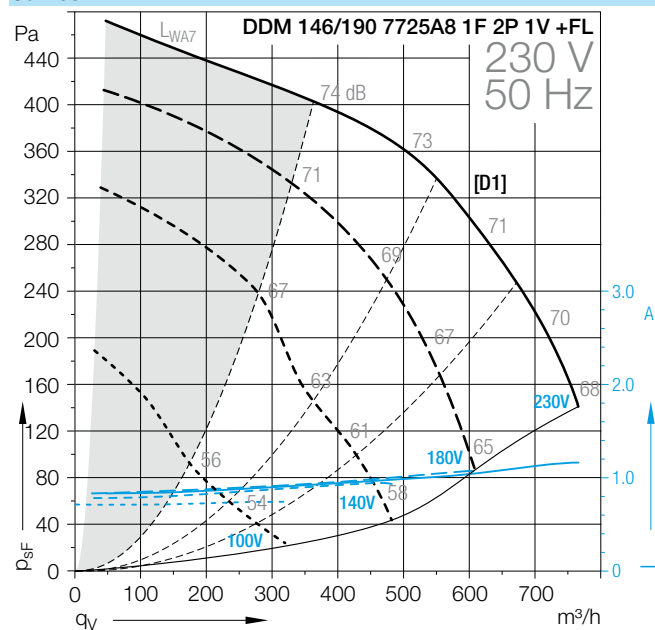
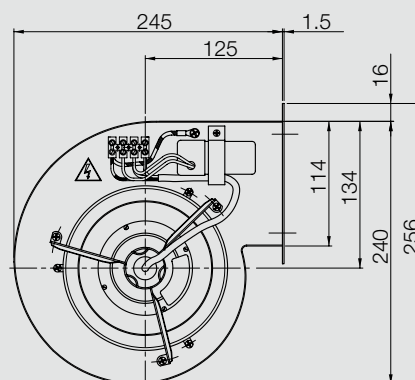
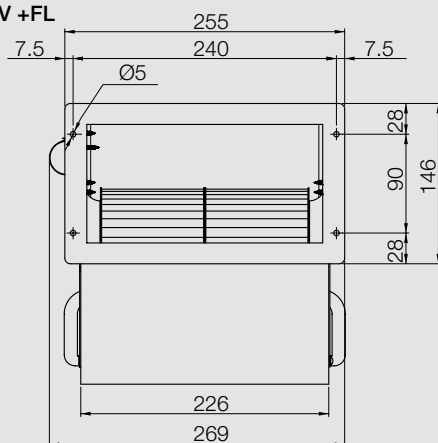
(2) = Speed controllable via TRIAC or Transformer

(3) = Speed controllable via Inverter

* = No speed control available

[H] High speed, [ME] Medium speed, [LO] Low speed

Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7} , see „Technical Description“.

Curves**Dimensions** in mm, Subject to change.**DDM 146/190 7725A8 1F 2P 1V +FL**

**Оформить
Заказ**

DDM 146/190**7725C2 1F 2P 1V +FL****Technical Data**

	Speed control	Curves	Nominal motor power W	Poles —	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
DDM 146/190 7725C2										
1F 2P 1V +FL	(1)	[D3/D4]	160	2	1~		50/60	326	1.4	2200

Technical Data

	Operating Capacitor μF	Nominal capacitor voltage V	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max. $^{\circ}\text{C}$	Fan weight kg	Density of media kg/m^3	Installation type (ISO 5801)	Article number
DDM 146/190 7725C2										
1F 2P 1V +FL	10	450	IP32	F	EXT	40	7	1.2	B	6102YU

(1) = Speed controllable via Transformer

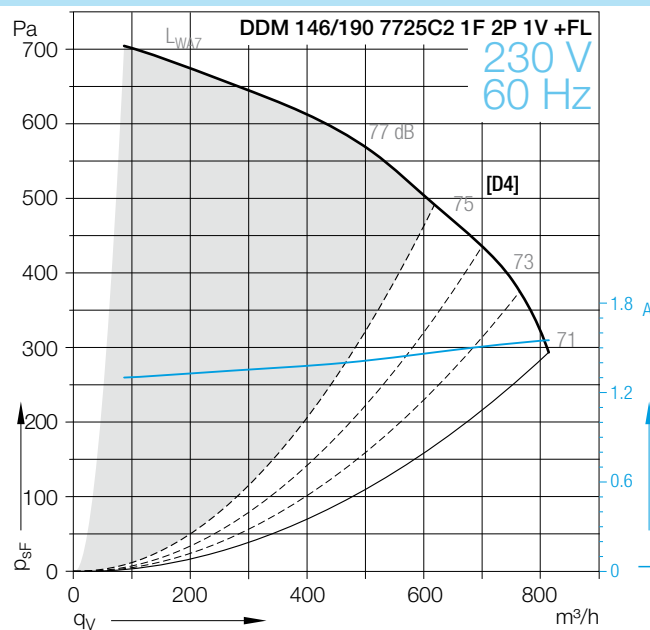
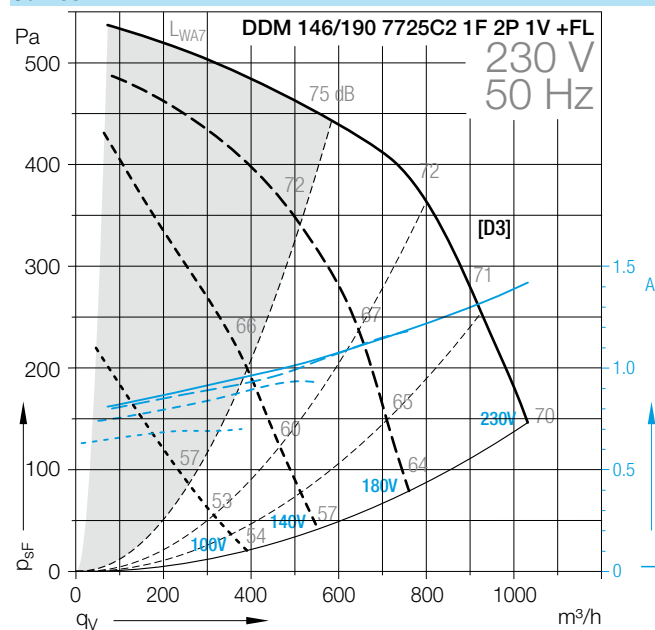
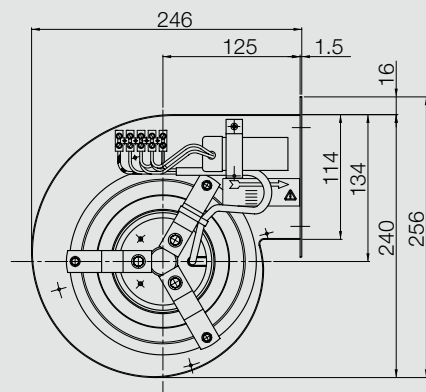
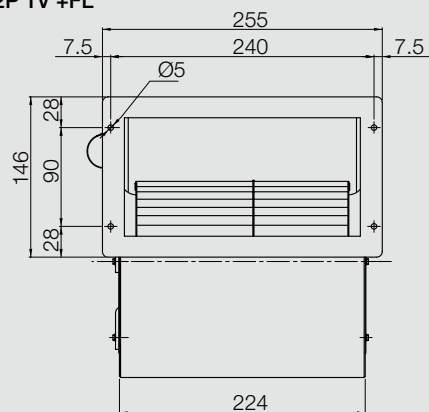
(2) = Speed controllable via TRIAC or Transformer

(3) = Speed controllable via Inverter

* = No speed control available

[H] High speed, [ME] Medium speed, [L] Low speed

Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7} , see „Technical Description“.

Curves**Dimensions** in mm, Subject to change.**DDM 146/190 7725C2 1F 2P 1V +FL****Оформить
Заказ**

DDM 146/190**7725C5 1F 4P 1V +FL****Technical Data**

	Speed control	Curves	Nominal motor power W	Poles —	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
DDM 146/190 7725C5										
1F 4P 1V +FL	(2)	[D5/D6]	20	4	1~		50/60	84	0.4	1300

Technical Data

	Operating Capacitor μF	Nominal capacitor voltage V	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max. $^{\circ}\text{C}$	Fan weight kg	Density of media kg/m^3	Installation type (ISO 5801)	Article number
DDM 146/190 7725C5										
1F 4P 1V +FL	2	450	IP32	B	INT	50	7	1.2	B	6102MH

(1) = Speed controllable via Transformer

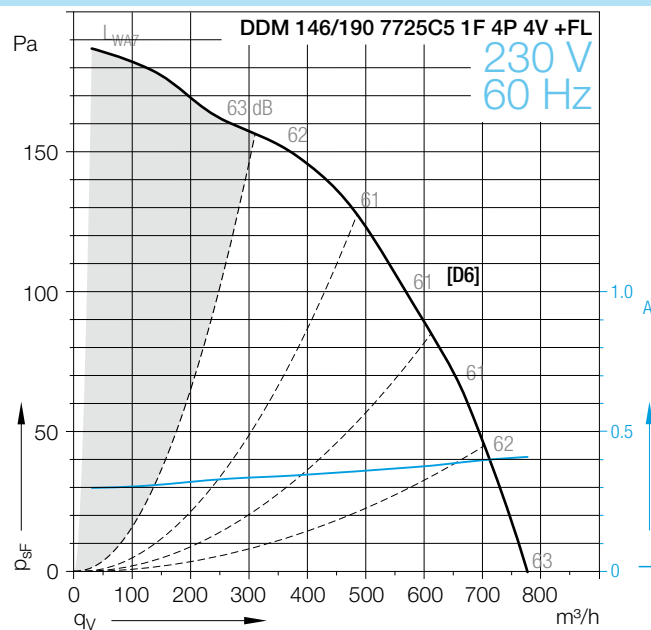
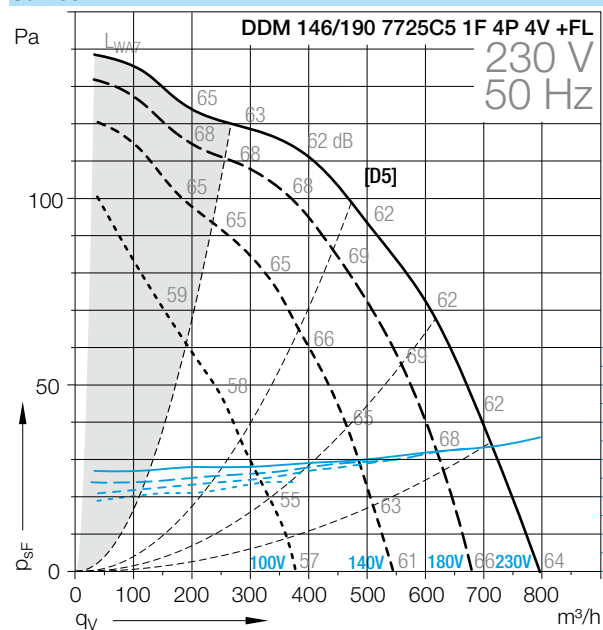
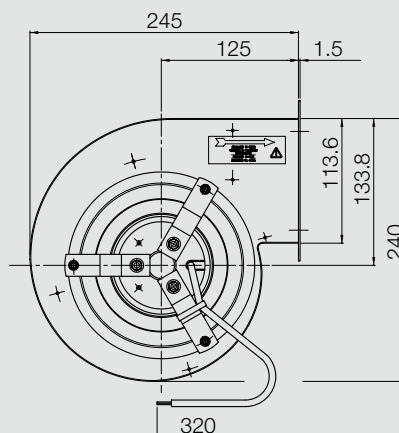
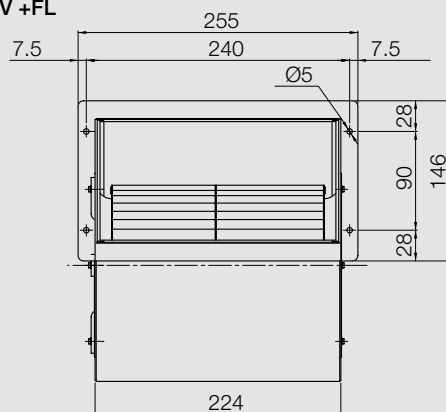
(2) = Speed controllable via TRIAC or Transformer

(3) = Speed controllable via Inverter

* = No speed control available

[H] High speed, [ME] Medium speed, [L] Low speed

Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level L_{WA7} , see „Technical Description“.

Curves**Dimensions** in mm, Subject to change.**DDM 146/190 7725C5 1F 2P 1V +FL****Оформить
Заказ**